


PARTS IDENTIFICATION

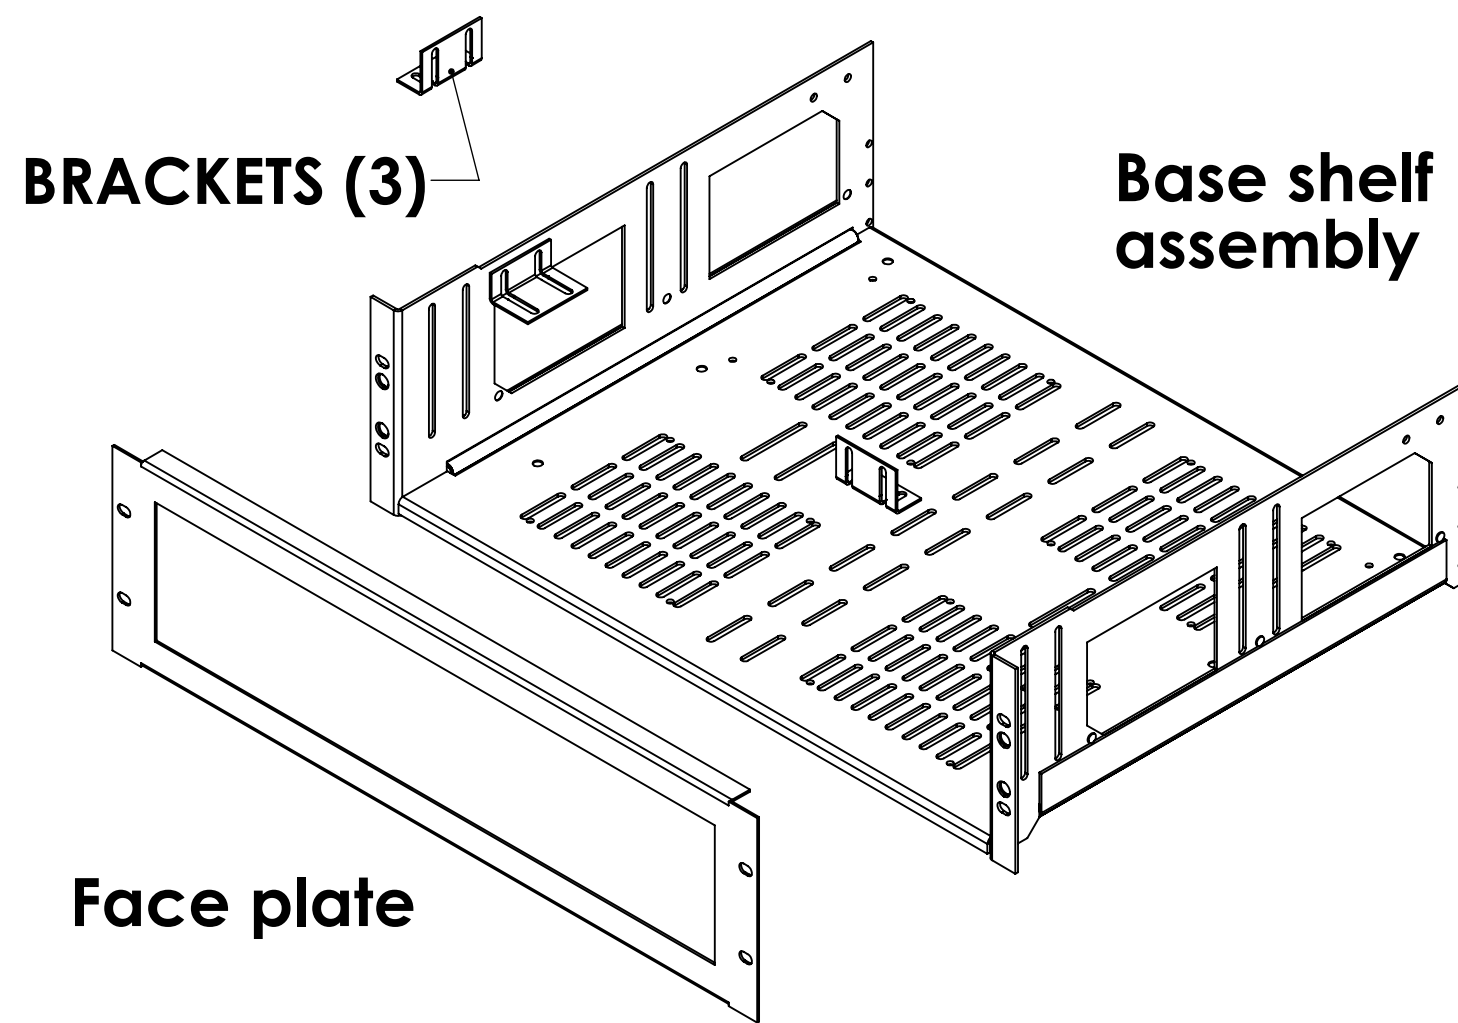

RMK SERIES RACK MOUNT KITS


2RU TO 5RU APPLICATIONS

Rotate the sides of the base shelf assembly to an upright position and center the piece of equipment on the base shelf.

Attach the hold down brackets to the sides or bottom of the shelf assembly (as shown) with 8-32 x 3/8" truss head screws and 8-32 hex nuts. Move the equipment to the front or rear of the shelf assembly to suit and tighten all of the screws in the hold down brackets.

Mount the base shelf assembly on the cabinet front mounting rails as shown with 10-32 x 1/2" flat head screws.

Center the window in the face plate over the piece of equipment and slide the face plate forward until it touches the shelf assembly. Secure the face plate to the rack kit with 10-32 x 7/8" finish head screws.

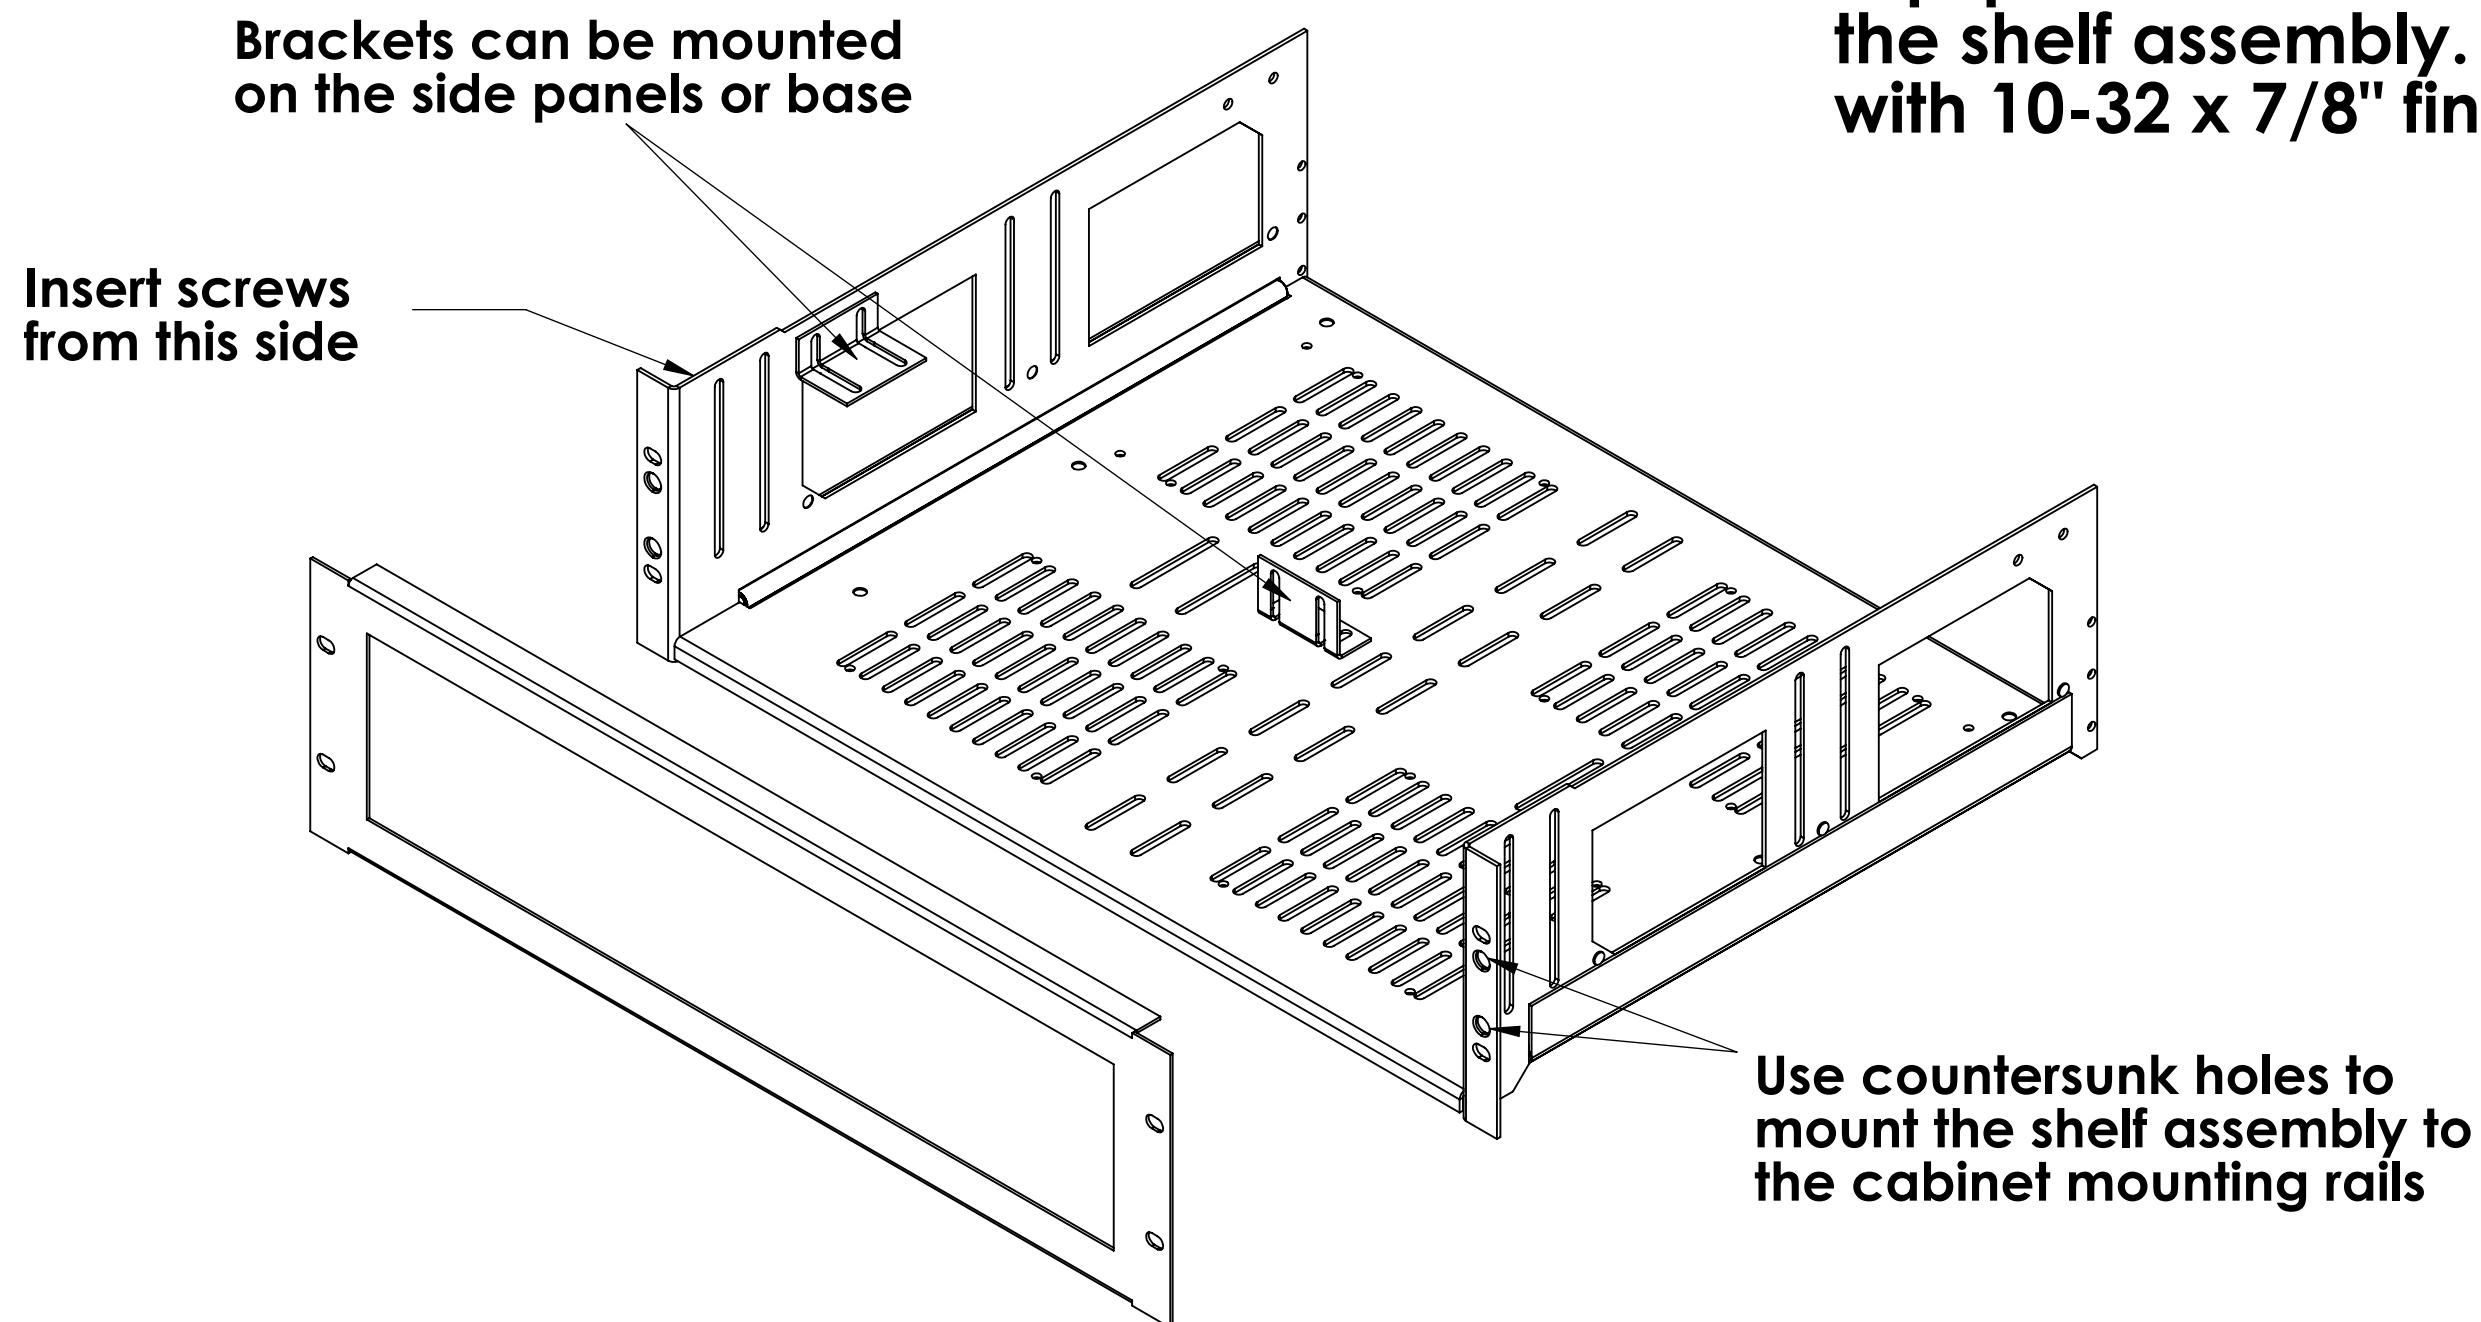

HARDWARE IDENTIFICATION:



10-32 x 7/8"
finish head
screw



10-32 x 1/2"
flat head
screw (uc)



8-32 keps
nut



8-32 x 3/8"
truss head
screw

HARDWARE:

- 4 10-32 x 7/8" Finish head screws (BO) (P/N: 21326)
- 4 10-32 x 1/2" Flat head screws (UC) (P/N: 15813)
- 6 8-32 x 3/8" Truss head screws (P/N: 234)
- 6 8-32 Keps nuts (P/N: 2370)
- 3 Brackets (P/N: 11765)

P/N: 15223 REV. A 8-10-15
REV. B 12-1-16

**LOWELL MANUFACTURING
PACIFIC, MO 63069**

**PHONE: (636) 257-3400
FAX (636) 257-6606**