

RESISTOR PACK

END OF LINE, 5% ACCURACY

ADI
PRO

ADI PRO's end of line terminal block resistor helps to prevent false alarms and provide zone supervision within fire and intrusion alarm systems. With 5% accuracy and known value, the resistor allows a control panel to more effectively differentiate between normal operation and fault or alarm conditions. The terminal block resistor also helps to secure wires.



FEATURES


Ideal for end of line applications with closed loop or open loop switches

Two 1K resistors per unit safely convert electrical energy to heat at the rate of 1/8 watt

Quick and easy to connect, with four pins per unit

5% resistance accuracy

Limited Lifetime Warranty

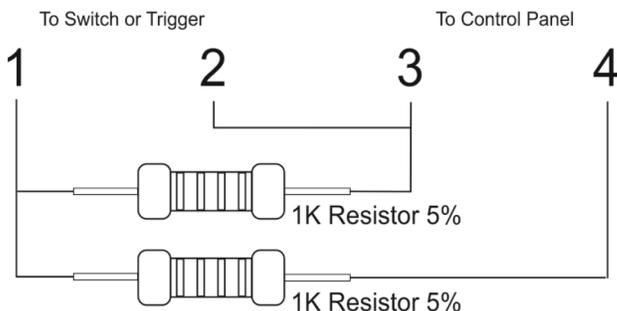

Normal Resistance: 2K Ω ; Alarm Resistance: 1K Ω
Shorted Resistance: 0 Ω ; Open Resistance: Infinite Ω

0E-MCR21KPK4

Product Specifications

PART #: 0E-MCR21KPK4
UPC: 840049306974

Case Dimensions:

1" x 0.5" x 0.5" (24 x 14 x 13mm)

Color: Black and green

Power Input: 12VDC

Package Quantity: 10 units



For more information contact
your ADI Sales person or visit
adiglobal.com/adiexclusivebrands

LOTS DE RÉSISTANCES

FIN DE LIGNE, PRÉCISION DE 5 %

ADI
PRO

La résistance du bornier de fin de ligne d'ADI PRO permet d'éviter les fausses alarmes et d'assurer la supervision des zones dans les systèmes d'alarme incendie et intrusion. Avec une précision de 5 % et une valeur connue, la résistance permet à un panneau de contrôle de différencier plus efficacement un fonctionnement normal d'une défaillance ou d'une alarme. La résistance du bornier permet également de fixer les fils.



CARACTÉRISTIQUES


Idéal pour les applications de fin de ligne avec des interrupteurs en boucle fermée ou ouverte

Deux résistances de 1K par unité convertissent en toute sécurité l'énergie électrique en chaleur à la vitesse de 1/8 watt

Connexion rapide et facile, avec quatre broches par unité

Précision de résistance de 5 %

Garantie à vie limitée

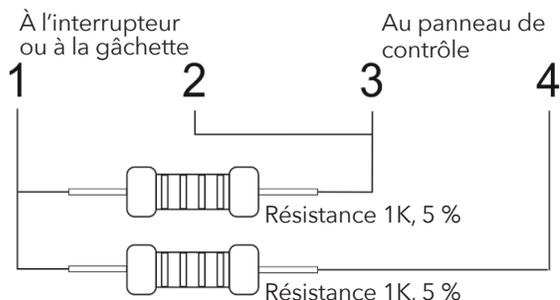

Résistance normale : $2K \Omega$: Résistance alarme : $1K \Omega$
Résistance défaillance : 0Ω : Résistance ouverte : Infinie Ω

0E-MCR21KPK4

Caractéristiques techniques

N° DE PIÈCE : 0E-MCR21KPK4

UPC: 840049306974

Dimensions du boîtier : 1 x 0,5 x 0,5 po (24 x 14 x 13 mm)

Couleur : Noir et vert

Entrée d'alimentation : 12 VCC

Quantité : 10 unités



Pour de plus amples renseignements,
communiquez avec un représentant ADI ou
visitez la page fr.adiglobaldistribution.ca