


Replacement Parts

ITEM	DESCRIPTION	PART #
1	Screw, 8-32 x 5/8"	†
2	Faceplate, grate style	†
3	Flat washer, #10	†
4	Screw, 8-32 x 3/16	†
5	Polycarbonate cover, CN-73	†
1-5	Faceplate and lens assembly	CN73-FP-LG-XX*
3-5	Polycarbonate lens assembly	CN73-CPI
6	O-ring	†
7	Bezel	250010280007
8	Lamp, PAR-36	See Lamp Chart
9	Cable assembly, 18 AWG SPT	†
10	Base, CF	†
11	Reversible installation tube	250028850000

* XX = Finish code
† This part is not serviceable. Contact Customer Support or a local distributor to order a new product.

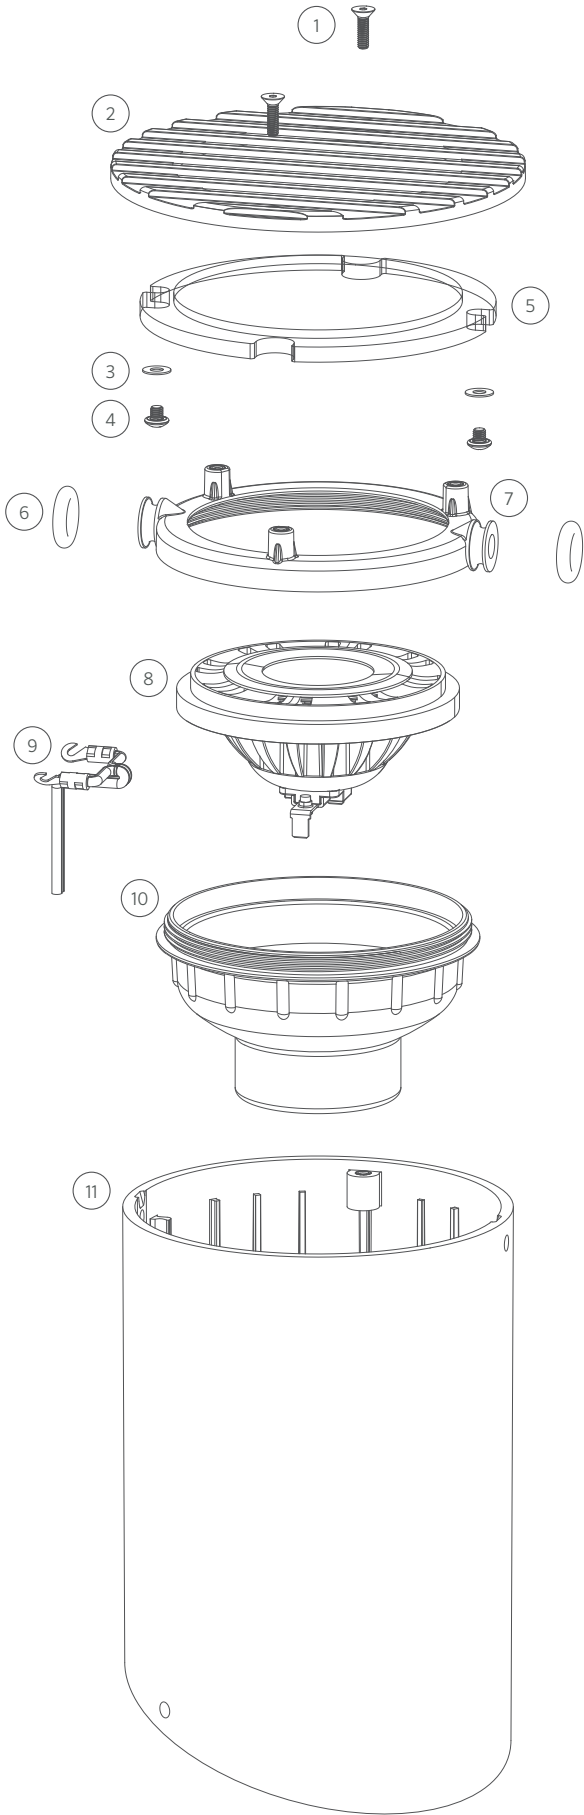

LAMPS | PAR-36 LAMPS

PAR-36 Eco Lamp Chart

LUMENS / VA	CCT	BEAM ANGLE	PART #
685 lm / 8.5 VA	2700K	35° Flood	PAR36-ECO-35-W-FL
665 lm / 8.5 VA	2700K	60° Wide Flood	PAR36-ECO-35-W-WF
675 lm / 8.5 VA	3000K	35° Flood	PAR36-ECO-35-S-FL
675 lm / 8.5 VA	3000K	60° Wide Flood	PAR36-ECO-35-S-WF
855 lm / 11.4 VA	2700K	35° Flood	PAR36-ECO-50-W-FL
860 lm / 11.4 VA	2700K	60° Wide Flood	PAR36-ECO-50-W-WF
845 lm / 11.4 VA	3000K	35° Flood	PAR36-ECO-50-S-FL
850 lm / 11.4 VA	3000K	60° Wide Flood	PAR36-ECO-50-S-WF



PAR-36 Eco



fxl.com/PAR36