How can I add a DVR V4.2 or NVR V4.2 to the WBOX VMS1 app on my Android or IOS phone via P2P (Scan QR Code)?
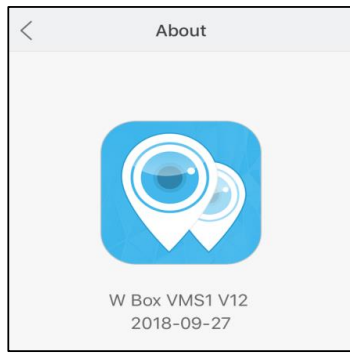
Product Models:

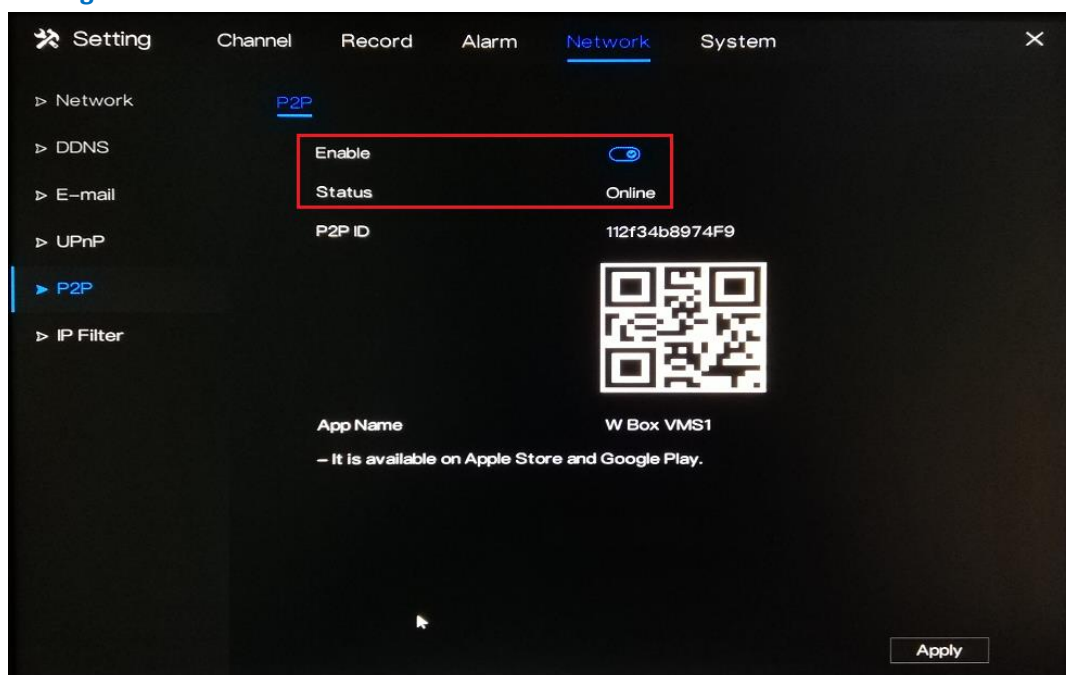| Hybrid DVR	NVR
0E-HD4C1TB	0E-4CHNVR1TB / 0E-4CHNVR2TB
0E-HD8C2TB	0E-8CHNVR2TB
0E-HD16C2TB	0E-16CHNVR2T / 0E-16CHNVR4T

Firmware Version: V4.2.XXXX.0000.157.X.XX.X.X

Preparation:

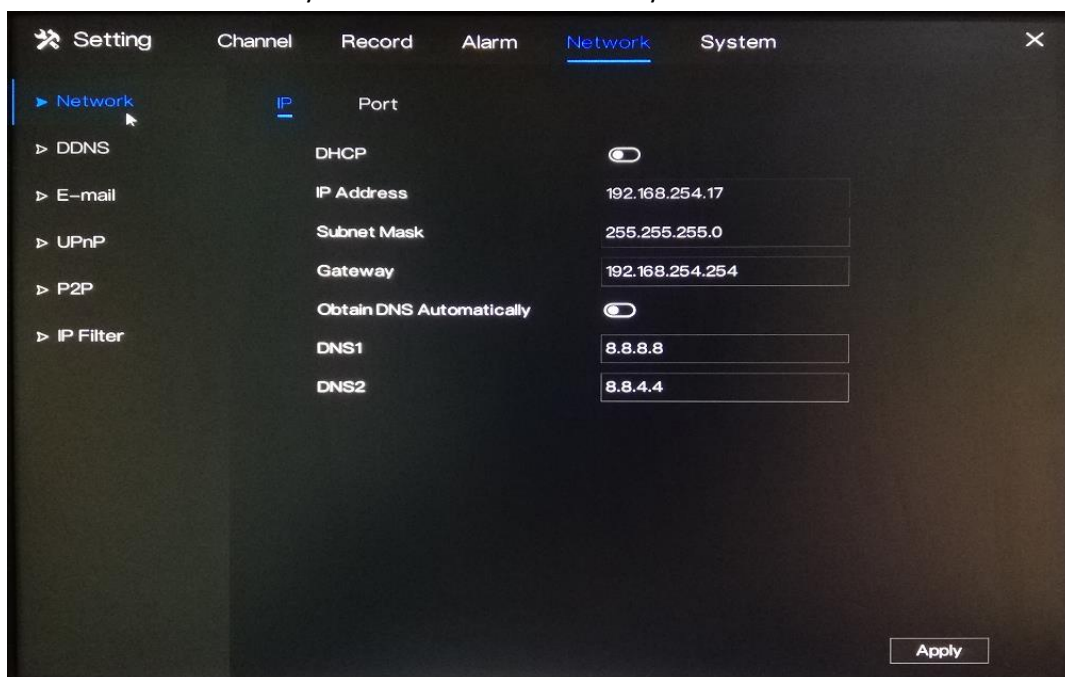1. Download and install the correct application which is the **WBOX VMS1**.

Phone OS	Android	IOS
Where to download	**Google Play**	**App Store**
	http://goo.gl/ppmCM4	**http://apple.co/2KYIoEg**
Required Phone OS Version	**Android 5.0 or later**	**IOS 8.0 or later**
Current App Version	**V3.4.0 2018-09-26**	**V12 2018-09-27**
	< About W Box VMS1 V3.4.0 2018-09-26	< About W Box VMS1 V12 2018-09-27

2. Ensure that the device is connected to a network and the status is 'Online'. You can find this information in **Setting > Network > P2P**.
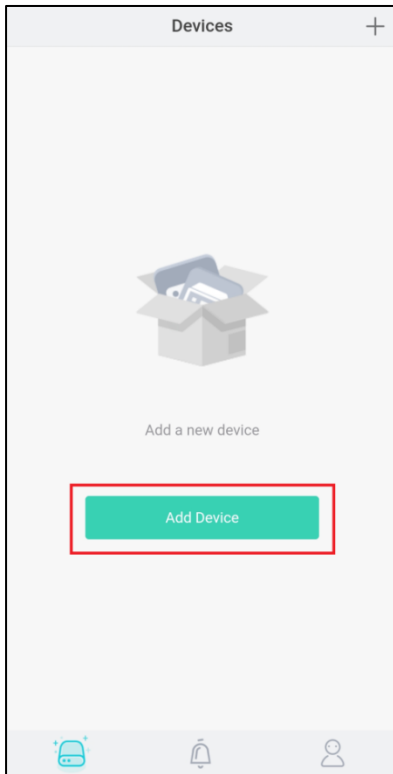
To ensure that the device is connected to the network properly, please follow the steps below.

[1] Check if the device is connected to a router with Internet access.

[2] Check if the device's network setting is set up properly. You can find this in **Setting > Network > Network > IP**.

   a) The device's **IP Address** should be in the same range as the router's gateway.

   b) **Subnet Mask** should be same as what is indicated in the router's network setting.

   c) The **Gateway** should the router's gateway or local IP address.

   d) **DNS 1** and **DNS 2** can be your router's DNS servers or you can use **8.8.8.8** and **8.8.4.4**.
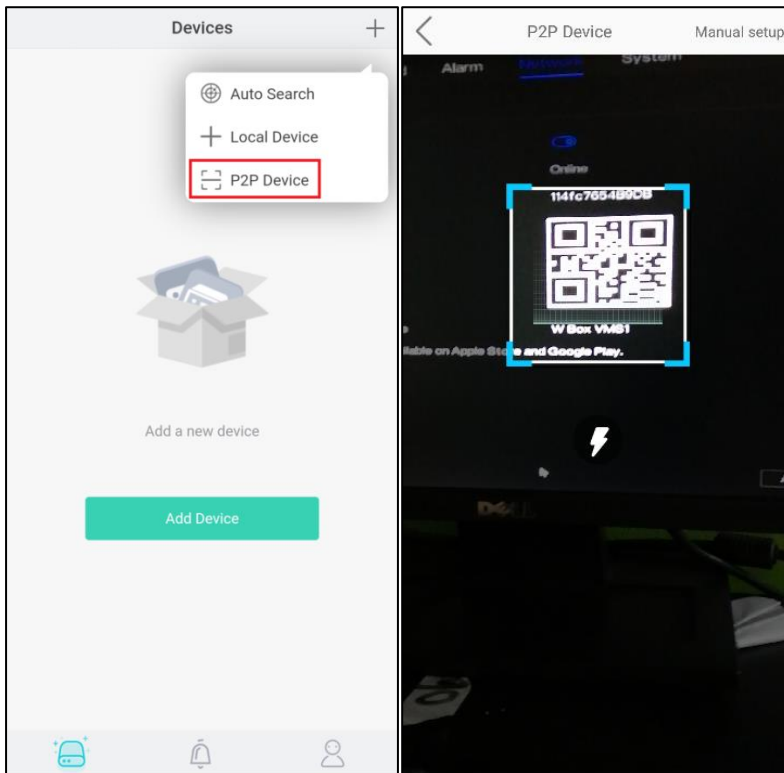
Procedure:
1. Open the WBOX VMS 1 app on your mobile phone.
2. Click **Add Device**.

3. Tap **P2P Device** and then scan the QR code that is shown on your device's interface. The QR code is located in **Setting > Network > P2P**.

4. Input the needed information on the app.
    a. Enter a **Nickname**.
    b. In the **Port** field, input the **Client Port** indicated in the device setting. This information can be found in **Setting > Network > Network > Port**.

    > **Please note:** The default value of the **Client Port** is **30001**. If you changed it to a different number, please make sure to input the new port number in the app.

    c. Enter the **Username** and **Password** of the device.
    d. Hit **Save** at the upper right corner to the save the information.

Add Device		Save
Nickname	DVR	
QR code	114fc7654B9DB	
Port	30001	
Username	admin	
Password	....	

😀 successful

Devices +

Favorites 1 ∨

My Favorite

NVR/DVR 1 ∨

DVR
Number of channels: 4