


# ConteraIP® Camera Accessories

Accessories for ConteraIP Series Mounting Solutions



## Mounting Configurations

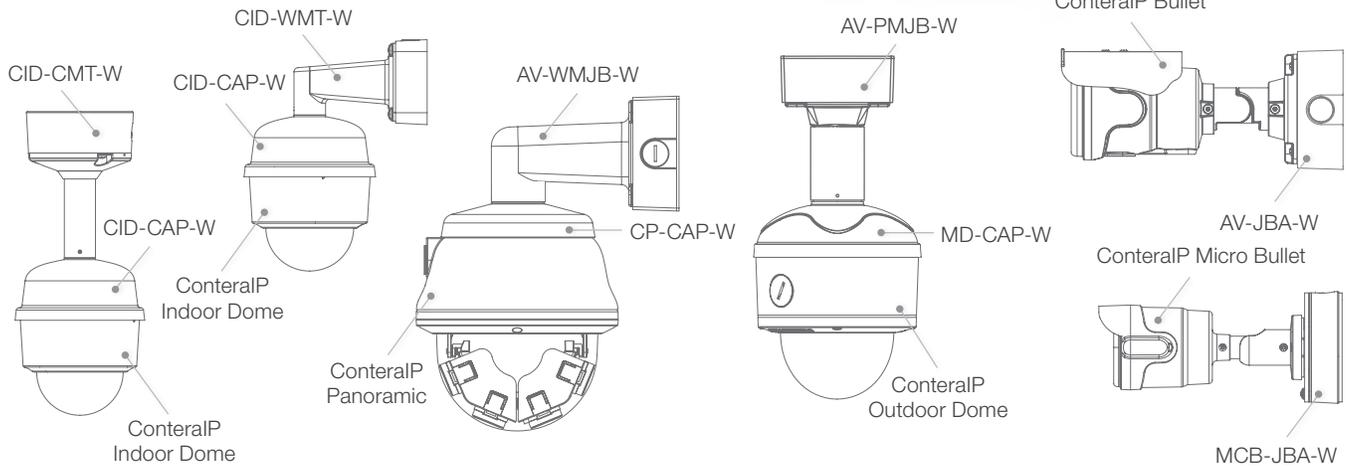

## Compatible Cameras



**ConteraIP** Indoor Dome

**ConteraIP** Outdoor Dome

**ConteraIP** Panoramic

**ConteraIP** Bullet

**ConteraIP** Micro Bullet

**CP-CAP-W**  
Mounting Cap (White)




**Features:**

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility</b>	Compatible with 1.5" NPT standard
	Works with ConteraIP® Panoramic

<b>Mechanical</b>	<b>Casing</b>	Die-cast aluminum
		IP66 weather proof standard
		IK-10 impact-resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	Ø 5.62" (142.8mm) x 1.4" H (35.5mm)
	<b>Weight</b>	<b>w/o Camera</b> 0.53lbs (0.238kg)

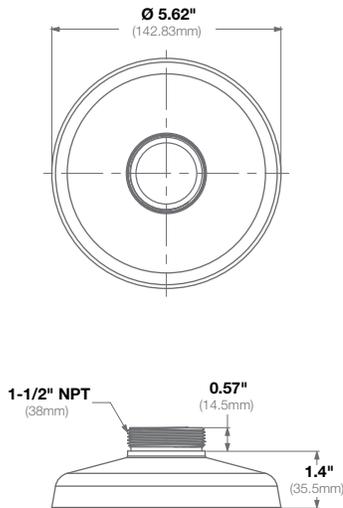

**MD-CAP-W**  
Mounting Cap (White)




**Features:**

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility</b>	Compatible with 1.5" NPT standard
	Works with ConteraIP® Outdoor Dome

<b>Mechanical</b>	<b>Casing</b>	Die-cast aluminum
		IP66 weather proof standard
		IK-10 impact-resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	Ø 6.06" (154.1mm) x 2.57" H (65.3mm)
	<b>Weight</b>	<b>w/o Camera</b> 1.02lbs (0.465kg)

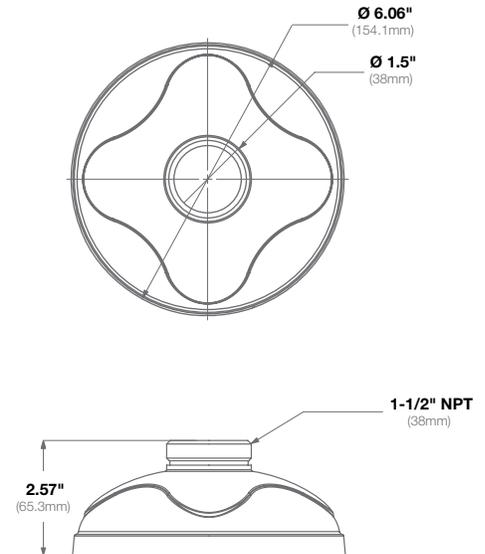

## CID-CAP-W

Mounting Cap (White)





**Features:**

- Easy Installation and Superior Design
- Lightweight Construction

<b>Compatibility</b>	Compatible with 3/4" NPT standard
	Works with ConteraIP® Indoor Dome

<b>Mechanical</b>	<b>Casing</b>	Plastic
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	Ø 4.92" (125mm) x 2.83" H (72mm)
	<b>Weight</b>	w/o Camera 0.22lbs (0.1kg)

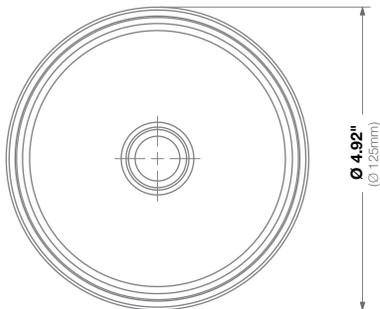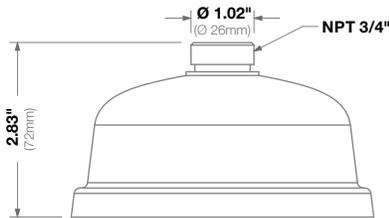

## CID-CMT-W

Pendant Mount with Built-In Junction Box Adapter (White)




**Features:**

- Easy Installation and Superior Design
- Lightweight Construction
- Includes CID-CAP-W Mounting Cap for ConteraIP Indoor Dome

<b>Compatibility</b>	Compatible with 1/2" NPT standard
	Works with ConteraIP® Indoor Dome

<b>Mechanical</b>	<b>Casing</b>	Die-cast aluminum and plastic
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	Ø 4.92" (125mm) x 7.9" H (201.2mm)
	<b>Weight</b>	w/o Camera 1.23lbs (0.56kg)

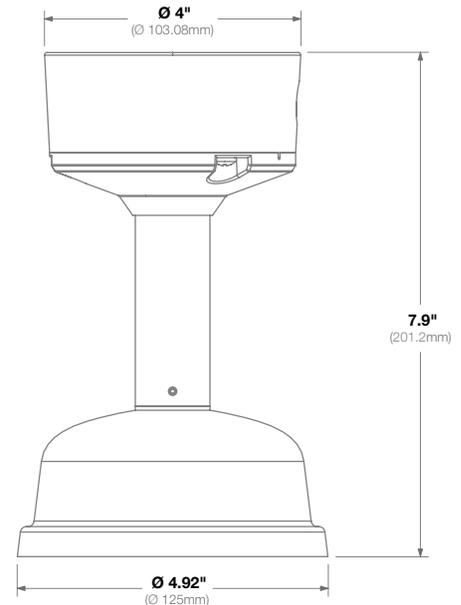

## AV-WMJB-W

Wall Mount Bracket with Junction Box (White)





**Features:**

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility</b>	Compatible with 1.5" NPT Female
	Works with ConteraIP® Outdoor Dome and ConteraIP® Panoramic

<b>Mechanical</b>	<b>Casing</b>	Die-cast aluminum
		IP66 weather proof standard
		IK-10 impact-resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	7.68" L (195.05mm) x 4.69" W (119.2mm) x 4.69" W (119.2mm)
<b>Weight</b>	<b>w/o Camera</b>	2.49lbs (1.13kg)

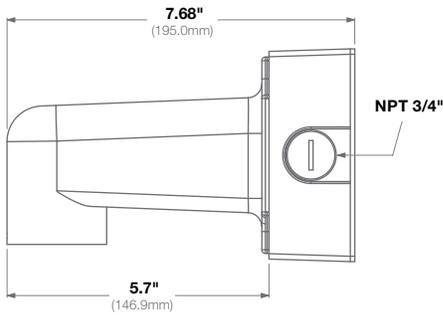

## CID-WMT-W

Wall Mount with Built-In Junction Box Adapter (White)





**Features:**

- Easy Installation and Superior Design
- Lightweight Construction
- Includes CID-CAP-W Mounting Cap for ConteraIP Indoor Dome

<b>Compatibility</b>	Compatible with 1/2" NPT standard
	Works with ConteraIP® Indoor Dome

<b>Mechanical</b>	<b>Casing</b>	Die-cast aluminum and plastic
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	6.85" L (174mm) x 4.92" W (125mm) x 5.25" H (133.32mm)
	<b>Weight</b>	<b>w/o Camera</b>

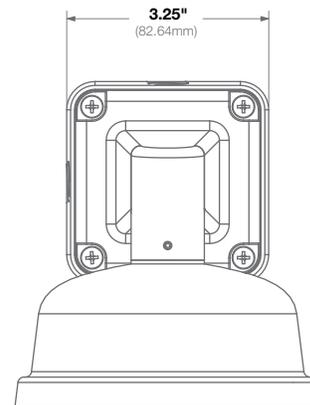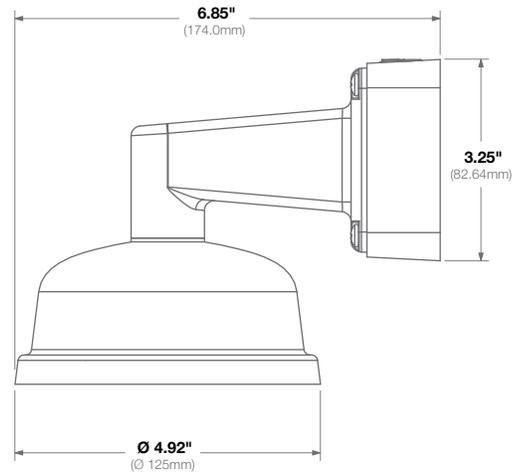

## AV-PMJB-W

Pendant Mount Bracket with Standard Junction Box





**Features:**

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility</b>	Compatible with 1.5" NPT Female
	Works with ConteraIP® Outdoor Dome and ConteraIP® Panoramic

<b>Mechanical</b>	<b>Casing</b>	Die-Cast Aluminum
		IP66 Weather Proof Standard
		IK-10 Impact-Resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	4.69" W (119.20mm) x 4.69" W (119.20mm) x 5.87" H (149.31mm)
	<b>Weight</b>	<b>w/o Camera</b> 2.12lbs (0.96kg)

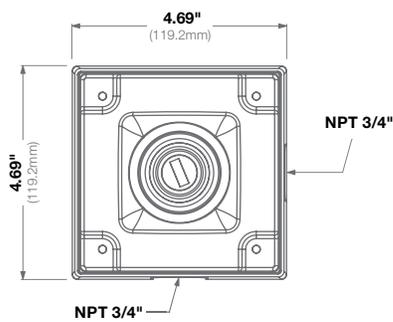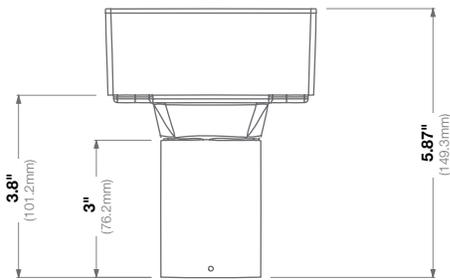

## AV-JBA-W

Square Standard Junction Box (White)





**Features:**

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility</b>	Compatible with 3/4" NPT standard
	Works with ConteraIP® Bullet

<b>Mechanical</b>	<b>Casing</b>	Die-cast aluminum
		IP66 weather proof standard
		IK-10 impact-resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	4.7" L (120mm) x 4.7" W (120mm) x 1.89" H (48.1mm)
	<b>Weight</b>	<b>w/o Camera</b> 1.3lbs (0.63kg)

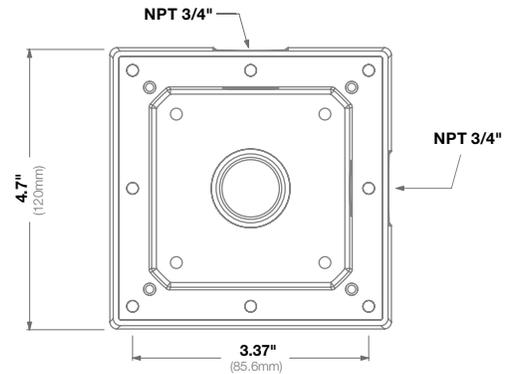

## MCB-JBA-W

Round Junction Box Adapter




Gasket included (not shown in photo)

**Features:**

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility</b>	Compatible with 1/2" NPT standard
	Works with ConteraIP® Micro Bullet and AV-EBAS-W

<b>Mechanical</b>	<b>Casing</b>	Die-cast aluminum
		IP66 weather proof standard
		IK-10 impact-resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	Ø 4.0" (101.5mm) x 1.34" H (34mm)
<b>Weight</b>	<b>w/o Camera</b> 0.74lbs (335g)	

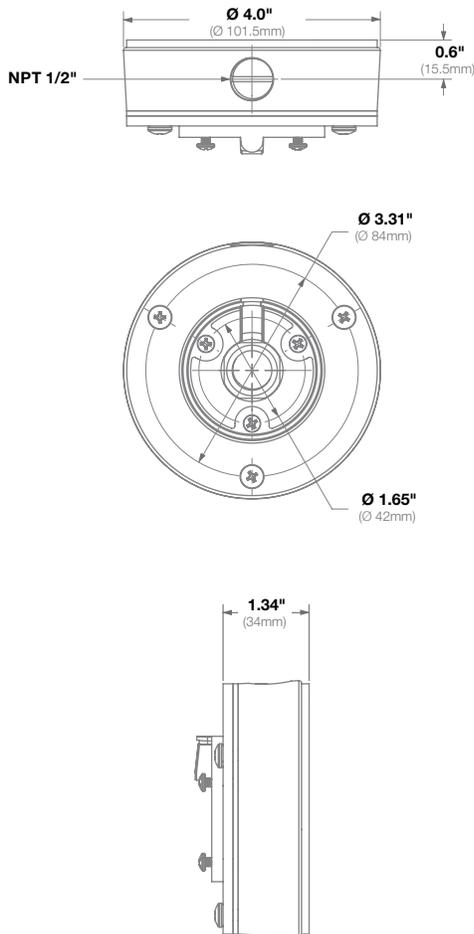

## MD-JBA-W

Round Junction Box




**Features:**

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility</b>	Compatible with 3/4" NPT standard
	Works with ConteraIP® Outdoor Dome

<b>Mechanical</b>	<b>Casing</b>	Die-Cast Aluminum
		IP66 Weather Proof Standard
		IK-10 Impact-Resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	Ø 6.06" (154mm) x 1.5" H (40mm)
<b>Weight</b>	<b>w/o Camera</b> 1lbs (0.45kg)	

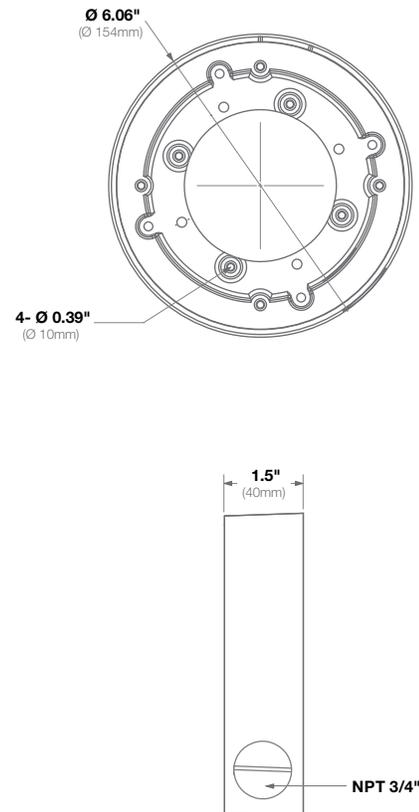

## AV-FMA

Flush Mount Adapter




**Features:**

- Easy Installation and Superior Design
- Low Profile Installation

**Compatibility** Works with ConteraIP® Outdoor Dome

<b>Mechanical</b>	<b>Casing</b>	Aluminum and plastic	
	<b>Color</b>	White	
	<b>Dimensions</b>	Ø 7.36" (187mm) x 3.9" H (99.1mm)	
	<b>Weight</b>	<b>w/o Camera</b>	1.1lbs (0.5kg)

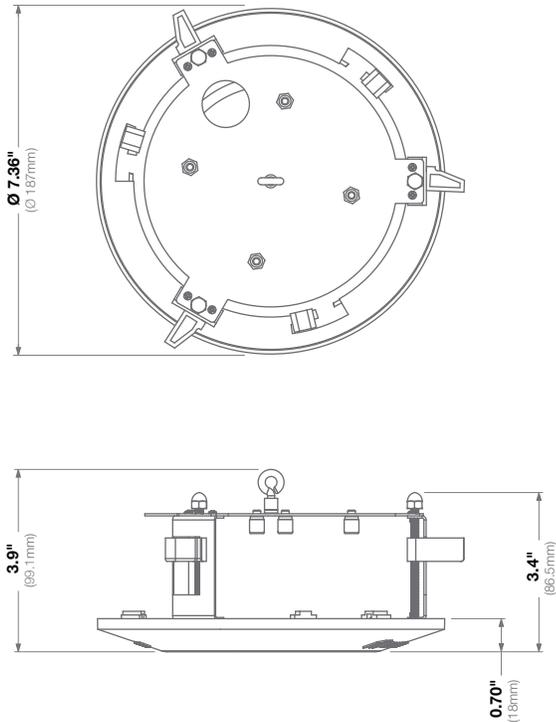

## CID-FMA

Flush Mount Adapter




**Features:**

- Easy Installation and Superior Design
- Low Profile Installation

**Compatibility** Works with ConteraIP® Indoor Dome

<b>Mechanical</b>	<b>Casing</b>	Aluminum and plastic	
	<b>Color</b>	White	
	<b>Dimensions</b>	Ø6.61" (168mm) x 3.42" W (86.76mm)	
	<b>Weight</b>	<b>w/o Camera</b>	1.1lbs (0.5kg)

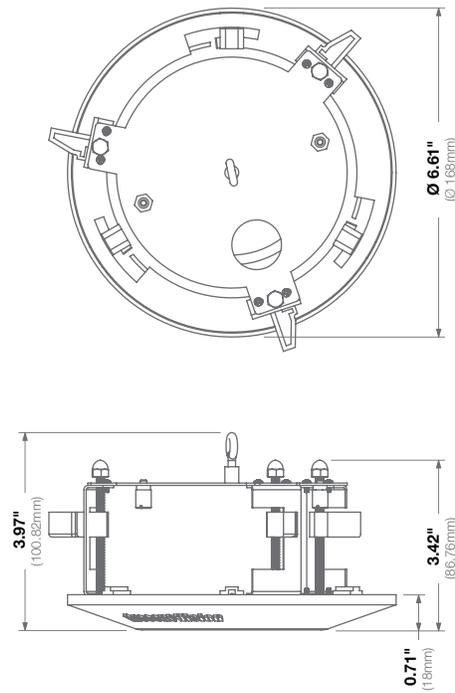

## AV-EBAR-W

Round Electrical Box Adapter Plate




### Features:

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility**</b>	Compatible with 3/4" NPT standard
	Works with CID-CMT-W and MCB-JBA-W

<b>Mechanical</b>	<b>Casing</b>	Die-Cast Aluminum
		IP66 Weather Proof Standard
		IK-10 Impact-Resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	Ø6" (152.4mm) x 0.15" W (4mm)
	<b>Weight</b>	<b>w/o Camera</b> 0.4lbs (0.18kg)

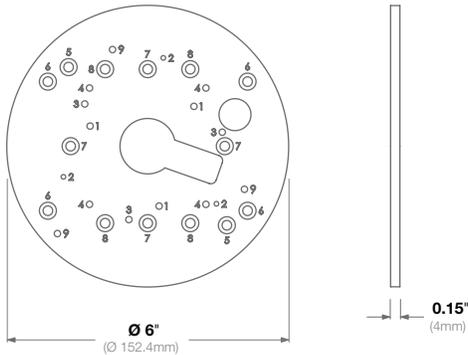

Hole No.	Model Compatibility
1	CID-CMT-W, MCB-JBA-W
2	Not Used for ConteraIP® Cameras or Accessories
3	Not Used for ConteraIP® Cameras or Accessories
4	Not Used for ConteraIP® Cameras or Accessories
5	4S Box
6	4-11/16" Square Box
7	Single Gang Box
8	Double Gang Box
9	Not Used for ConteraIP® Cameras or Accessories

### Quick Installation:

1. Pass cables through the center hole of the adapter plate.
2. Attach the adapter plate to the electrical box (sold separately) using the appropriate hardware and mounting holes.
3. Attach the compatible part noted above.

## AV-EBAS-W

Square Electrical Box Adapter Plate




### Features:

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

<b>Compatibility**</b>	Compatible with 3/4" NPT standard
	Works with ConteraIP® MicroBullet, ConteraIP® Bullet, ConteraIP® Panoramic, AV-JBA-W, AV-WMJB-W, AV-PMJB-W, and CID-WMT-W

<b>Mechanical</b>	<b>Casing</b>	Die-Cast Aluminum
		IP66 Weather Proof Standard
		IK-10 Impact-Resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	4.7" L (120mm) x 0.15" W (4mm) x 4.7" H (120mm)
	<b>Weight</b>	<b>w/o Camera</b> 0.33lbs (0.13kg)

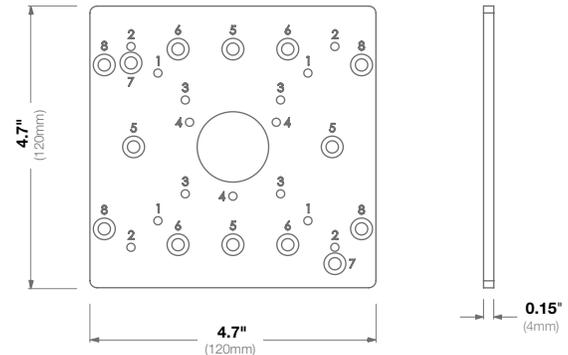

Hole No.	Model Compatibility
1	AV-JBA-W, AV-WMJB-W, AV-PMJB-W
2	AV-WMJB-W Bracket, AV-PMJB-W Bracket, ConteraIP® Bullet, ConteraIP® Panoramic
3	CID-CMT-W
4	ConteraIP MicroBullet
5	Single Gang Box
6	Double Gang Box
7	4S Box (4" Square, 4" Octagonal)
8	4-11/16" Square Box

### Quick Installation:

1. Pass cables through the center hole of the adapter plate.
2. Attach the adapter plate to the electrical box (sold separately) using the appropriate hardware and mounting holes.
3. Attach the compatible part noted above.

## AV-PMA-W

Pole Mount Adapter





### Features:

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage


**Compatibility** Works with AV-WMJB-W, AV-JBA-W, and CID-WMT-W

<b>Mechanical</b>	<b>Casing</b>	Die-Cast Aluminum
		IP66 Weather Proof Standard
		IK-10 Impact-Resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	2.6" L (67.9mm) 5.01" x W (127.32mm) x 4.92" H (125mm)
	<b>Weight</b>	w/o Camera 0.32lbs (0.15kg)

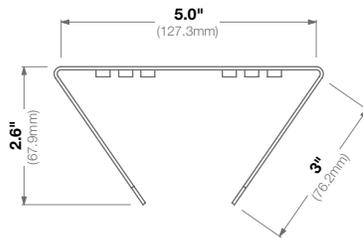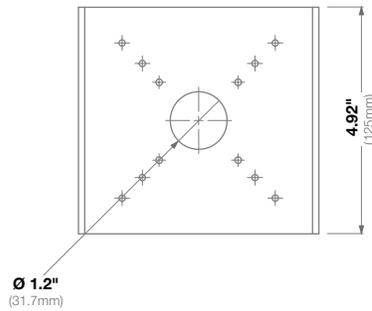

## AV-CRMA-W

Corner Mount Adapter





### Features:

- Easy Installation and Superior Design
- Heavy Duty Enclosure Protection for Applications in Harsh Environments
- Die-Cast Aluminum is Resistant to Impact and Salt Damage

**Compatibility** Works with AV-WMJB-W, AV-JBA-W, and CID-WMT-W

<b>Mechanical</b>	<b>Casing</b>	Die-Cast Aluminum
		IP66 Weather Proof Standard
		IK-10 Impact-Resistant
	<b>Color</b>	Arecont Vision® White (Pantone® Cool Gray 1C)
	<b>Dimensions</b>	7.35" W (186.7mm) x 10.74" W (272.8mm) x 4.92" H (125mm)
	<b>Weight</b>	w/o Camera 0.59lbs (0.27kg)

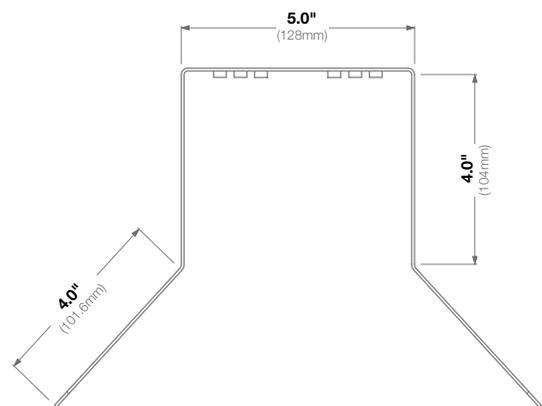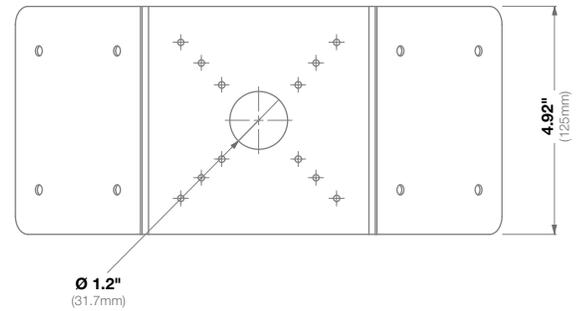

See Next Page for Ordering Information



## Compatible Accessories by Camera Model

<b>ConteraIP® Panoramic</b>	CP-CAP-W, AV-EBAS-W, AV-WMJB-W, AV-PMJB-W
<b>ConteraIP® Bullet</b>	AV-EBAS-W, AV-JBA-W
<b>ConteraIP® Micro Bullet</b>	AV-EBAS-W, MBC-JBA-W
<b>ConteraIP® Indoor Dome</b>	CID-CAP-W, CID-CMT-W, CID-FMA, CID-WMT-W
<b>ConteraIP® Outdoor Dome</b>	AV-FMA, AV-WMJB-W, AV-PMJB-W, MD-CAP-W, MD-JBA-W

## Accessory Model Numbers

<b>AV-CRMA-W</b>	Corner Mount Adapter (Arecont Vision® White)
<b>AV-EBAR-W</b>	Round Electrical Box Adapter Plate for ConteraIP® Series Cameras (Arecont Vision® White)
<b>AV-EBAS-W</b>	Square Electrical Box Adapter Plate for ConteraIP® Series Cameras (Arecont Vision® White)
<b>AV-FMA</b>	Flush Mount Adapter for ConteraIP® Outdoor Dome (Arecont Vision® White)
<b>AV-JBA-W</b>	Standard Junction Box (Arecont Vision® White)
<b>AV-PMA-W</b>	Pole Mount Adapter (Arecont Vision® White)
<b>AV-PMJB-W</b>	Pendant Mount Bracket with Standard Junction Box (Arecont Vision® White)
<b>AV-WMJB-W</b>	Wall Mount Bracket with Standard Junction Box (Arecont Vision® White) <i>(Fits Cap 1.5" NPT, Box Fits 3/4" NPT)</i>
<b>CID-CAP-W</b>	Mounting Cap for ConteraIP® Indoor Dome (Arecont Vision® White)
<b>CID-CMT-W</b>	Pendant Mount with Built-In Junction Box Adapter (Arecont Vision® White) <i>(Includes CID-CAP-W, Box Fits 1/2" NPT)</i>
<b>CID-FMA</b>	Flush Mount Adapter for ConteraIP® Indoor Dome (Arecont Vision® White)
<b>CID-WMT-W</b>	Wall Mount with Built-In Junction Box Adapter (Arecont Vision® White) <i>(Includes CID-CAP-W, Box Fits 1/2" NPT)</i>
<b>CP-CAP-W</b>	Mounting Cap for ConteraIP® Panoramic (Arecont Vision® White)
<b>MCB-JBA-W</b>	Round Junction Box for ConteraIP® Micro Bullet (Arecont Vision® White)
<b>MD-CAP-W</b>	Mounting Cap for ConteraIP® Outdoor Dome (Arecont Vision® White)
<b>MD-JBA-W</b>	Round Junction Box for ConteraIP® Outdoor Dome (Arecont Vision® White)