



# *Limitless Lighting Controls:*

From **Standard**  
to **Smart:**

designed to be better.®



# The right lighting controls will transform a home, improving how it functions, feels and looks...

Creating ambiance and adjusting light levels to fit any mood with dimming control.



Reducing energy waste by as much as 70% with sensors and timers that turn lights off automatically.



Adding comfort, safety and convenience with design-inspired smart devices that provide control from anywhere.



## FEATURED SOLUTIONS

- LED/CFL Dimmers ..... 3
- 0-10V LED/Fluorescent Dimmers ..... 4
- Tru-Universal Dimmers..... 5
- Smart Dimmers ..... 6
- Sensors and Timers..... 8
- Fan Speed Controls..... 9

## ALL LIGHTING CONTROL SOLUTIONS

- Standard.....10
- Designer.....12
- Smart .....14

## Choosing the Right Lighting Control



### Single-Pole One Location

Dim the lights from one location using a single dimmer switch.



### 3-Way Two Locations

Control the lights from two locations – one 3-way dimmer switch and one 3-way light switch.



### Multi-Location Three or More Locations

Control the lights from three or more locations using a 3-way dimmer or multilocation dimmer.



### Multi-Location With Smart Gateway

Control the lights from multiple locations with a wired switch, Smart Gateway and wireless switch.




## LED Dimmers

Thanks to innate energy-efficiency and longevity, LED technology is the hero of modern dimming. Legrand provides control that's tailored to both the needs and advantages of LED lighting through our range of easy and reliable LED/CFL (120V) dimmers, available across six user-friendly interfaces.

Toggle Slide LED/CFL Dimmer TSDCL303PW	Wide Slide LED/CFL Pre-Set Dimmer WSCL453PW	Long Slide LED/CFL Pre-Set Dimmer LSCL453PW	Deco Rotary LED/CFL Dimmer DRCL453PW	<b>NEW</b> radiant® LED/CFL Dimmers RHL153PW RHL373PW	adorne® LED/CFL Dimmer ADPD453LW2

- Works with dimmable LED bulbs and fixtures up to 450W
- Also compatible with dimmable INC/CFL/HAL bulbs
- No neutral connection required
- Simple dimming range calibration
- Preset, Single Pole, & 3-way models available
- Most popular and efficient bulb/dimmer

## Colors

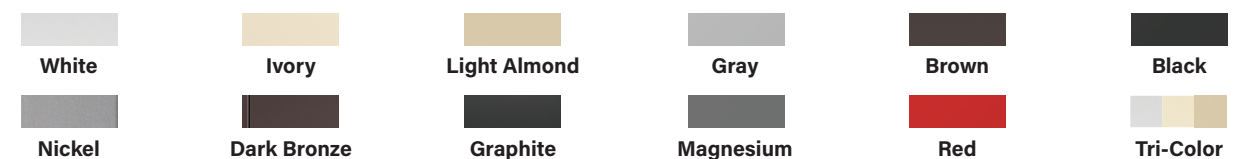




## 0-10V LED Dimmers

Controlling the light level of compatible fixtures through DC voltage, 0-10V Dimmers can offer the simplest and smoothest lighting control experience with plenty of energy-saving potential. Available models feature multiple interfaces, including three unique designer options from the *adorne*® Collection.

Toggle Slide 0-10V Dimmer TSD4FBL3PW	Wide Slide 0-10V Dimmer WS4FBL3PW	radiant® 0-10V Dimmer RH4FBL3PW	adorne® 0-10V Paddle Dimmer ADPD4FBL3P2W4	adorne® 0-10V softTap Dimmer ADTP4FBL3PW4	adorne® 0-10V Touch Dimmer ADTH4FBL3PW4

- Used specifically for control of any 0-10V dimmable LED fixture or driver (works with 0-10V fluorescent as well)
- Common in both commercial and residential lighting fixtures
- Control up to 30 dimmable 0-10V fixtures per dimmer

### Colors

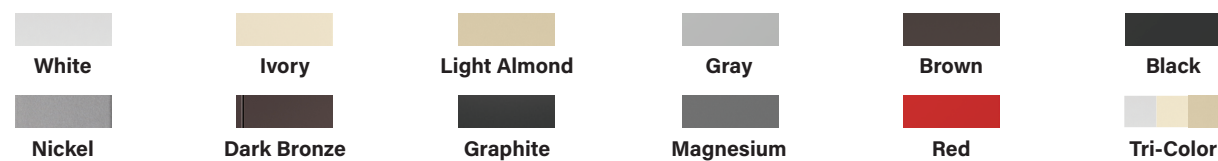


## Tru-Universal Dimmers

Devised to take the guesswork out of compatibility and the flicker out of performance, Legrand's Tru-Universal Dimmers self-calibrate to work with virtually any 120V dimmable bulb or fixture (excludes 0-10V). Usable with LED, fluorescent, incandescent, MLV and ELV loads, as well as for forward- and reverse-phase dimming, the only decision required is which interface to choose.

Toggle Slide Tru-Universal Dimmer TSD703PTUW	radiant® Tru-Universal Dimmer RH703PTUW	adorne® softTap Tru-Universal Dimmer ADTP703TUW4	adorne® Touch Tru-Universal Dimmer ADTH703TUW4	adorne® Whisper Tru-Universal Dimmer ADWR703TUW4

- Simplicity at its best: works with nearly any forward-phase or reverse-phase LED bulb or fixture
- Auto-calibration of dimming range for less installation steps
- Neutral wire required

### Colors

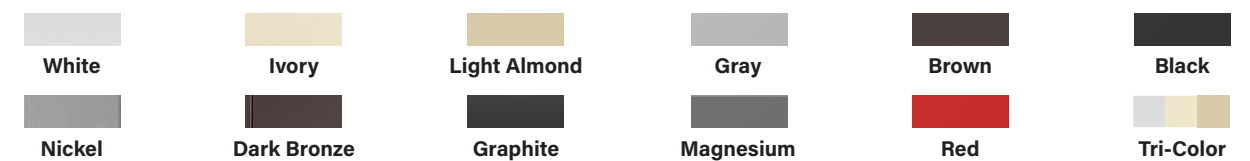




### Smart Gateways with Netatmo

Creating an ultra-reliable mesh network that strengthens with every device added, just one Smart Gateway (in-wall or surface-mount) can support up to 98 smart switches, dimmers and outlets in a single installation. Mix and match smart devices from both the *adorne*® and *radiant*® Collections to create a perfectly personalized whole-home solution.

radiant® WNRH1WH	radiant® Surface-Mount WNRH2WH	adorne® WNAH1W1	adorne® Surface-Mount WNAH2W1

## adorne® and radiant® with Netatmo

Taking features and flexibility to another level, Smart Lighting with Netatmo grants advanced control of lights and power from anywhere. The Smart Gateway establishes a dedicated network to control the home's compatible smart devices, and an intuitive app simplifies control of lighting scenes and schedules, energy use and more. Smart Lighting with Netatmo is easily compatible with other smart products and offers ultra-reliable performance.

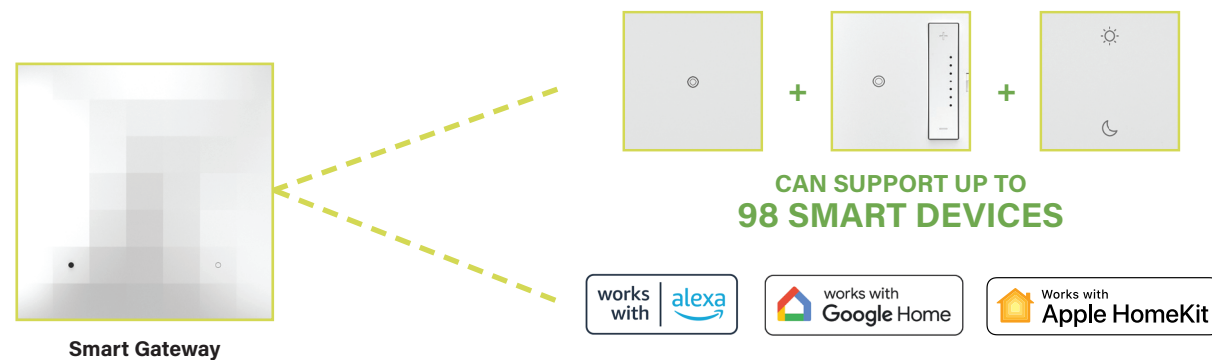

**NEW**

### Smart Lighting Easy Kits

- Conveniently add a dimmer or switch exactly where it's needed without running wires
- Add a Smart Gateway with Netatmo to control lights via app, connect to other smart products and more

Easy 3-Way Switch Kit, White WNRZK10WH	Easy 3-Way Dimmer Kit, White WNREZK50WH	Easy Switched Outlet Kit, White WNREZK15WH

### Smart Tru-Universal Dimmers with Netatmo

Leading smart home technology and versatile dimming compatibility converge in our selection of Smart Tru-Universal Dimmers with Netatmo. Available from both designer Collections, as well as in a convenient Plug-In version for smart control of dimmable floor and table lamps.

radiant® WNRL50WH	adorne® sofTap WNAL50W1	Plug-In WNP20

### Wireless Smart Dimmers with Netatmo

Made for adding 3-way control anywhere and everywhere it's wanted, these wireless smart dimmers mount to a wall or surface with provided adhesive - no wiring, no cutting, no tools required. Must be paired with a Smart Tru-Universal Dimmer with Netatmo.

radiant® WNRL63WH	adorne® WNAL63W1

### Colors





## Sensors and Timers


Saving energy is easiest when the lights turn off on their own. So whether it's auto on/off (occupancy sensors), manual on/auto off (vacancy sensors) or manual on/timed off (timers), these lighting controls from Legrand's designer collections offer eco-friendly efficiency, as well as convenience, in style.

radiant® Occupancy/Vacancy Sensors RRW600UTC RRW600VTC	radiant® 4-Button Timer Switch RT2W	adorne® Occupancy/Vacancy Sensors ASOS32W4 ASVS12W4	adorne® Sensor with Incandescent Dimmer ADSM703HW2	adorne® 4-Button Timer Switch ASTM2W2

Sensors can be used to comply with Title 24 efficiency standards.

- Reduce energy waste and cost
- Hands free comfort and safety
- Great for entry ways, closets, pantries and bathrooms

### Colors

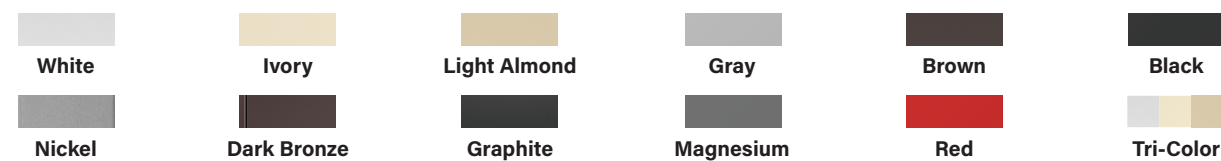


## Fan Speed Controls

For those who need to control more than just the lights, Legrand offers fan speed solutions that match the ease, convenience and aesthetics of our other devices. Available in seven attractive interfaces, including options with de-humming for quieter control.

Toggle Slide TSDDH163PW	Wide Slide WSDH16W WSSC53PW	Long Slide LSCLDC163PW LSDH16WV LSSC5W LSSC5PW	Deco Rotary DRDH163PW DRSC53PW	Humidity HSWF3W HSWC3W	radiant® RHDH163PW	adorne® AAFN4S16AW4

- Easy access to fan speed controls - no need to reach pull string
- Preset, Single Pole and 3-way models
- Dual dimmer and humidity control options available

### Colors

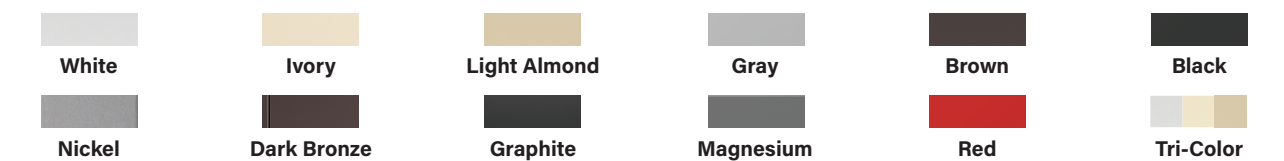

# Toggle Slide



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>TSD703PTU*</b>	Tru-Universal Dimmer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), Red (RED), White (W)	120V 450W LED/CFL; 700W ELV/INC/HAL; 500VA MLV; 5.5A EFL	Y
<b>TSDCL303P*</b>	LED/CFL/Incandescent Dimmer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), Red (RED), White (W)	120V 300W LED/CFL; 700W INC/HAL	
<b>TSDSSL7AP*</b>	LED SSL7A-Compliant Dimmer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), Red (RED), White (W)	120V 250W LED/CFL; 300W INC/HAL	
<b>TSD4FBL3P*</b>	0-10V LED/Fluorescent Dimmer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), Red (RED), White (W)	120/277V (0-10V dimming only) 120V 10A / 277V 5A 0-10V LED/FL	
<b>TSDDH163P*</b>	Fan Speed Control and De-Hummer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), Red (RED), White (W)	120V 1.6A Fan Speed Control	
<b>TSDLV703P*</b>	Magnetic Low Voltage Dimmer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), Red (RED), White (W)	120V 700VA MLV	
<b>TSD2KIT*</b>	Interchangeable Faceplate	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), Red (RED), White (W)		

# Long Slide



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>LSCL453P*</b>	LED/CFL/Incandescent Dimmer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), White (W)	120V 450W LED/CFL; 700W INC/HAL	
<b>LSCL450*</b>	LED/CFL/Incandescent Dimmer, Single-Pole, Non-Preset	Black (BK), Brown (-), Gray (GRY), Ivory (I), Light Almond (LA), White (W)	120V 450W LED/CFL; 700W INC/HAL	
<b>LSCLDC163P*</b>	LED/CFL/Incandescent Dimmer with Fan Speed Control and De-Hummer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Ivory (I), Light Almond (LA), White (W)	120V 150W LED/CFL; 300W INC/HAL 1.6A Fan Speed Control	
<b>LSDH16*V</b>	Fan Speed Control and De-Hummer, Single-Pole, Non-Preset	Black (BK), Brown (-), Ivory (I), Light Almond (LA), White (W)	120V 1.6A Fan Speed Control	
<b>LSSC5*</b>	Fan Speed Control, Single-Pole, Non-Preset	Black (BK), Brown (-), Ivory (I), Light Almond (LA), White (W)	120V 5A Fan Speed Control	
<b>LSSC5P*</b>	Fan Speed Control, Single-Pole/3-way, Preset	Black (BK), Brown (-), Ivory (I), Light Almond (LA), White (W)	120V 5A Fan Speed Control	

# Deco Rotary



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>DRCL453P*</b>	LED/CFL/Incandescent Dimmer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Ivory (I), Light Almond (LA), White (W)	120V 450W LED/CFL; 700W INC/HAL	
<b>DRDH163P*</b>	Fan Speed Control and De-Hummer, Single-Pole/3-Way, Preset	Black (BK), Brown (-), Ivory (I), Light Almond (LA), White (W)	120V 1.6A Fan Speed Control	
<b>DRSC53P*V</b>	Fan Speed Control, Single-Pole/3-Way, Continuously Variable, Preset	Black (BK), Brown (-), Ivory (I), Light Almond (LA), White (W)	120V 5A Fan Speed Control	

# Wide Slide



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>WSCL453P*</b>	LED/CFL Dimmer, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V 450W LED/CFL; 700W INC/HAL	
<b>WSCL450*</b>	LED/CFL Dimmer, Single-Pole, Non-Preset	White (W), Tri-Color (TC)	120V 450W LED/CFL; 700W INC/HAL	
<b>WS4FBL3P*</b>	0-10V LED/Fluorescent Dimmer with Integrated Power Pack, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120/277V (0-10V dimming only) 120V 10A / 277V 5A LED/FL	
<b>WSSC53P*</b>	Fan Speed Control and De-Hummer, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V 5A Fan Speed Control	
<b>WSDH16*</b>	Fan Speed Control and De-Hummer, Single-Pole, Non-Preset	White (W), Tri-Color (TC)	120V 1.6A Fan Speed Control	
<b>WSKIT*</b>	Interchangeable Faceplate (for Non-Preset Devices)	Black (BK), Brown (-)		
<b>WSKITP*</b>	Interchangeable Faceplate	Black (BK), Brown (-), Ivory (I), Light Almond (LA)		

Note: Tri-Color devices ship with interchangeable faceplates in Ivory, Light Almond and White.

# Decorator



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>HSWF3*</b>	Humidity-Based Fan Control, Single-Pole	Light Almond (LA), White (W)	120V 6A Fan Speed Control	
<b>HSWC3*</b>	Humidity-Based Fan Control and Switch, Single-Pole	Light Almond (LA), White (W)	120V 150W LED/CFL; 600W INC/HAL; 400W EFL 6A Fan Speed Control	

Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>RH703PTU*</b>	Tru-Universal Dimmer, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	Y
<b>RHL153P</b>	LED Advanced Dimmer	White (W), Light Almond (LA), Ivory (I), Black (BK), Gray (GRY), Brown (-), Red (RED), Nickel (NI), Dark Bronze (DB), Graphite (G)	120V, 150W LED;150W CFL/INC	
<b>RHL373P*</b>	LED 2-Wire Dimmer, SSL7A Compliant, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V 250W LED/CFL; 300W INC/HAL	
<b>RHL743P*</b>	LED/CFL/Incandescent Dimmer, SSL7A Compliant, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V 450W LED/CFL; 700W INC/HAL	Y
<b>RH4FBL3P*</b>	0-10V LED/Fluorescent Dimmer, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120/277V (0-10V dimming only) 120V 10A / 277V 5A LED/FL	
<b>RHCL453P*</b>	LED/CFL/Incandescent Dimmer, Single-Pole/3-Way, Preset	Dark Bronze (DB), Graphite (G), Nickel (NI), White (W), Tri-Color (TC)	120V 450W LED/CFL; 700W INC/HAL	
<b>RRW600V*</b>	Vacancy Sensor, Single-Pole	Tri-Color (TC)	120V 600W, 1/6 HP	
<b>RRW600U*</b>	Occupancy Sensor, Single-Pole/3-Way	Bi-Color (BC), Tri-Color (TC)	120V 600W, 1/6 HP	
<b>RT2*</b>	4-Button Timer Switch, Single-Pole/3-Way	Black (BK), Dark Bronze (DB), Ivory (I), Light Almond (LA), Nickel (NI), White (W)	120V 600W, 1/6 HP	Y
<b>RHDH163P*</b>	Fan Speed Control and De-Hummer, Single-Pole/3-Way, Preset	Bi-Color (BC), White (W), Tri-Color (TC)	120V 1.6A Fan Speed Control	
<b>RHLV703P*</b>	Magnetic Low Voltage Dimmer, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V 700VA MLV	
<b>HCL453PMM*</b>	Multi-Location Master Dimmer, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V 450W LED/CFL; 700W INC/HAL; 700VA MLV	
<b>HMR*</b>	Multi-Location Remote Dimmer, Single-Pole/3-Way, Preset	White (W), Tri-Color (TC)	120V	
<b>HDH163PMM*</b>	Multi-Location Fan Speed Control and De-Hummer, Single-Pole/3-Way, Preset	White (W)	120V 1.6A Fan Speed Control	Y
<b>RHKIT*</b>	Interchangeable Faceplate	Black (BK), Brown (-), Dark Bronze (DB), Graphite (G), Gray (GRY), Ivory (I), Light Almond (LA), Nickel (NI), Red (RED), White (W)		

Note: Bi-Color devices ship with interchangeable faceplates in Dark Bronze and Nickel. Tri-Color devices ship with interchangeable faceplates in Ivory, Light Almond and White.

Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
------------------	---------------------	--	--------------------	----------------

PADDLE



PADDLE

<b>ADPD453L*</b>	LED/CFL/Incandescent Dimmer, Single-Pole/3-Way	Magnesium (M2), Graphite (G2), White (W2)	120V 450W LED/CFL; 700W INC/HAL	
<b>ADPD4FBL3P2*</b>	0-10V LED/Fluorescent Dimmer, Single-Pole/3-Way	Magnesium (M4), Graphite (G4), White (W4)	120/277V (0-10V dimming only) 120V 10A / 277V 5A LED/FL	
<b>AAFN4S16A*</b>	Fan Speed Control and De-Hummer	Magnesium (M2), Graphite (G2), White (W2)	120V 1.6A Fan Speed Control	

SOFTAP



SOFTAP®

<b>ADTP703TU*</b>	Tru-Universal Dimmer, Single-Pole/3-Way	Magnesium (M4), Graphite (G4), White (W4)	120V 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	Y
<b>ADTP4FBL3P*</b>	0-10V LED/Fluorescent Dimmer, Single-Pole/3-Way	Magnesium (M4), Graphite (G4), White (W4)	120/277V (0-10V dimming only) 120V 10A / 277V 5A LED/FL	
<b>ASVS12*</b>	Vacancy Sensor (Manual On/Auto Off)	Magnesium (M4), Graphite (G4), White (W4)	120V 600W, 1/6HP	
<b>ASOS32*</b>	Occupancy Sensor (Auto On/Auto Off)	Magnesium (M4), Graphite (G4), White (W4)	120V 600W, 1/6HP	
<b>ADSM703H*</b>	Occupancy Sensor with Incandescent Dimmer (Auto On/Auto Off), 700W	Magnesium (M2), Graphite (G2), White (W2)	120V 700W INC/HAL	
<b>ASTM2*</b>	Timer Switch (Manual On/Timed Off)	Magnesium (M2), Graphite (G2), White (W2)	120V 600W, 1/6HP	

TOUCH



TOUCH

<b>ADTH703TU*</b>	Tru-Universal Dimmer, Single-Pole/3-Way	Magnesium (M4), Graphite (G4), White (W4)	120V 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	Y
<b>ADTH4FBL3P*</b>	0-10V LED/Fluorescent Dimmer, Single-Pole/3-Way	Magnesium (M4), Graphite (G4), White (W4)	120/277V (0-10V dimming only) 120V 10A / 277V 5A LED/FL	

WHISPER



WHISPER®

<b>ADWR703TU*</b>	Tru-Universal Dimmer	Magnesium (M4), Graphite (G4), White (W4)	120V 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	Y
-------------------	----------------------	---	--	---

# Smart the radiant® collection



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>WNRH1*</b>	Smart Gateway with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	120V	Y
<b>WNRH2*</b>	Smart Surface-Mount Gateway with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	120V	Y
<b>WNRL10*</b>	Smart Switch with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	15A, 120V	Y
<b>WNRL50*</b>	Smart Tru-Universal Dimmer with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	120V; 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	Y
<b>WNRL23*</b>	Wireless Smart Switch with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	Battery-operated	
<b>WNRL63*</b>	Wireless Smart Dimmer with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	Battery-operated	
<b>WNRL33*</b>	Home/Away Wireless Smart Switch with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	Battery-operated	
<b>WNRL43*</b>	Wake/Sleep Wireless Smart Switch with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	Battery-operated	
<b>WNRR15*</b>	Smart 15A Outlet with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	15A, 125V	Y
<b>WNRR20*</b>	Smart 20A Outlet with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	20A, 125V	Y
<b>WNRCB40*</b>	Wireless Smart Scene Controller with Netatmo	Light Almond (LA), Nickel (NI), White (WH)	Battery-operated	
<b>WNP10</b>	Smart Plug-In Switch with Netatmo	White	120V	
<b>WNP20</b>	Smart Plug-In Tru-Universal Dimmer with Netatmo	White	120V 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	
<b>067695</b>	4-Scene Pocket Remote Controller	Black		
<b>064875</b>	Wireless Motion Sensor with Netatmo	White		

# Smart the adorne® collection



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>WNAH1*</b>	Smart Gateway with Netatmo	Magnesium (M1), Graphite (G1), White (W1)	120V	Y
<b>WNAH2*</b>	Smart Surface-Mount Gateway with Netatmo	Magnesium (M1), Graphite (G1), White (W1)	120V	Y
<b>WNAL10*</b>	Smart Switch with Netatmo	Magnesium (M1), Graphite (G1), White (W1)	15A, 120V	Y
<b>WNAL50*</b>	Smart Tru-Universal Dimmer with Netatmo	Magnesium (M1), Graphite (G1), White (W1)	120V; 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	Y
<b>WNAL23*</b>	Wireless Smart Switch with Netatmo	Magnesium (M1), Graphite (G1), White (W1)		
<b>WNAL63*</b>	Wireless Smart Dimmer with Netatmo	Magnesium (M1), Graphite (G1), White (W1)		
<b>WNAL33*</b>	Home/Away Wireless Smart Switch with Netatmo	Magnesium (M1), Graphite (G1), White (W1)		
<b>WNAL43*</b>	Wake/Sleep Wireless Smart Switch with Netatmo	Magnesium (M1), Graphite (G1), White (W1)		
<b>WNAR153*</b>	Smart 15A Outlet with Netatmo	Magnesium (M1), Graphite (G1), White (W1)	15A, 125V	Y
<b>WNAR203*</b>	Smart 20A Outlet with Netatmo	Magnesium (M1), Graphite (G1), White (W1)	20A, 125V	Y
<b>WNACB40*</b>	Wireless Smart Scene Controller with Netatmo	Magnesium (M1), Graphite (G1), White (W1)	Battery-operated	
<b>WNP10</b>	Smart Plug-In Switch with Netatmo	White	120V	
<b>WNP20</b>	Smart Plug-In Tru-Universal Dimmer with Netatmo	White	120V 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	
<b>067695</b>	4-Scene Pocket Remote Controller	Black		
<b>064875</b>	Wireless Motion Sensor with Netatmo	White		

## Easy Kits Easy Kits come pre-paired and do not require a gateway for remote control of the wired load. Smart control can be added to these kits with a gateway, if needed.



Base Part Number	Product Description	Color Designations (Replace * in Part Number)	Electrical Ratings	Neutral Needed
<b>WNREZK10WH</b>	Easy 3-Way Switch Kit	White	15A, 120V	Y
<b>WNREZK50WH</b>	Easy 3-Way Dimmer Kit	White	120V 450W LED/CFL; 700W INC/HAL; 500VA MLV; 700W ELV; 5.5A EFL	Y
<b>WNREZK15WH</b>	Easy Switched Outlet Kit	White	15A, 120V	Y



designed to be better.



**Electrical Wiring Systems**  
60 Woodlawn Street  
West Hartford, CT 06110  
1.877.BY.LEGRAND [295.3472]  
[www.legrand.us](http://www.legrand.us)

