

**AnyBODY™ Conduit Bodies**



930 ships as LB



Converts to a...



C



LL



LR



T

Scan For Video



Copper-free aluminum die-cast. Five conduit bodies in one! Ships as an LB, but converts to a T, LL, LR, or C. Switch covers and threaded flanges as needed to create the style you need.


**FEATURES AND BENEFITS**

- Meets NEC 2014 Section 314.16 Paragraph (C) (2) for conduit bodies with splices, taps, or devices
- Convenient and easy to use
- Saves the time, space, and cost of stocking five different conduit bodies (LB, T, LL, LR, C)
- 1/2" to 2" sizes are combination EMT/rigid—they're threaded for rigid, but also have a set-screw for use with EMT
- Includes threaded flanges for three openings
- Volume and wire fill marked inside bodies
- Recessed O-rings under covers and flanges

**Combination threaded IMC or rigid and set-screw EMT.**

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
930	17900	1/2	4.80	10	10	5.111	2.520	1.670
931	17901	3/4	7.80	10	10	5.640	2.770	2.020
932	17902	1	11.50	5	5	6.530	3.280	2.160
933	17903	1-1/4	32.30	2	10	8.550	4.020	2.980
934	17904	1-1/2	32.30	2	10	8.550	4.020	2.980
935	17905	2	69.50	1	5	10.730	4.670	3.500

Refer to page H-2 for flange illustration.  
**PATENTED.**

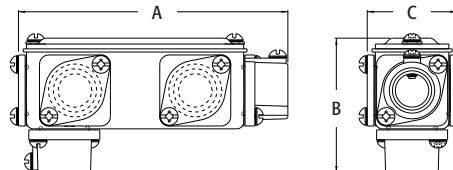


**Threaded only for IMC or rigid.**

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
936	17906	2-1/2	175.50	1	1	13.900	5.970	4.800
937	17907	3	175.50	1	1	14.340	6.400	4.800
938	17908	3-1/2	334.00	1	1	16.840	7.330	5.840
939	17909	4	334.00	1	1	16.840	7.330	5.840

**PATENTED.**



**930 1/2" ANYBODY SHOWING CONVERSION TO LR**

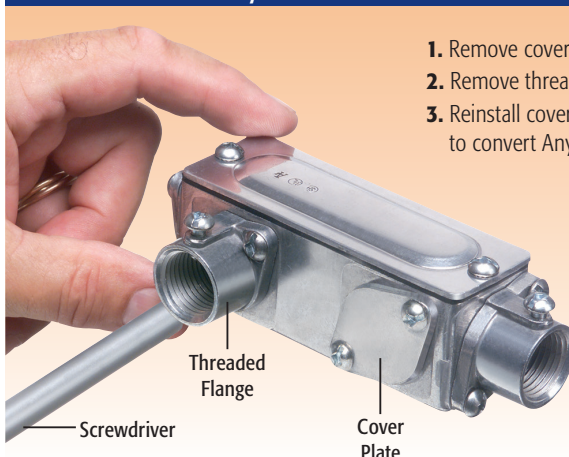

1. Remove cover plate.
2. Remove threaded flange.
3. Reinstall cover plate and flange in the appropriate opening to convert AnyBODY to the desired configuration.

COMPETITIVELY PRICED WITH LBS & **NO EXTRA COST FOR Ts**