

18/2 PLENUM RATED, UNSHIELDED SECURITY & CONTROL CABLE



18 AWG 2 Stranded Conductors, Unshielded

Ratings CMP, CL3P, FT6
 Approvals ETL Listed


Construction

Conductor 18 AWG 19 Strand Bare Copper
 Conductor Count 2
 Insulation Plenum PVC (0.007" nom.)
 Insulation Colors Black, Red
 Lay Length 3.29" nom.
 Shielding N/A
 Rip Cord Yes
 Jacket Plenum PVC (0.015" nom.)
 Overall Diameter 0.148" nom.

Print Legend ADI PRO P/N RN-9003XXX OXYGEN
 FREE 2C18 3180662 C(ETL)US CL3P 75C, CMP FT6
 ROHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage 300 Volts max.
 DC Resistance 6.66 Ohms/1000' at 20°C
 Capacitance 32.2 pF/ft. nom.
 Temperature -20°C to 75°C
 Flame Rating NFPA 262 (Plenum);
 CSA C22.2 No. 2556 (FT6)
 RoHS Compliant Yes
 Country of Origin CHINA

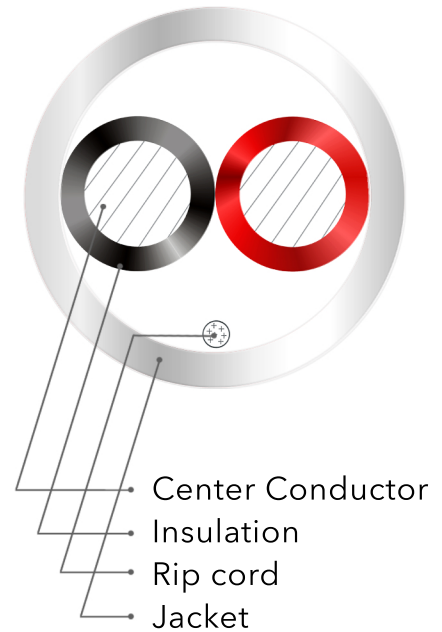

PART#	COLOR	LENGTH	BOX
RN-9003110	OFF WHITE	1000FT	EXPRESS BOX
RN-9003510	OFF WHITE	500FT	EXPRESS BOX
RN-9003115	ORANGE	1000FT	EXPRESS BOX
RN-9003119	GREY	1000FT	EXPRESS BOX



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands