

CAT5E 24 PORT PATCH PANEL 19" RACK MOUNTABLE, 1 RMU



SKU: 041-372/24

DESCRIPTION

Panel Housing

Material SPCC
Thickness 0.06 in. (1.5 mm)
Black (RAL 9005)
IDC Suitable for 22-26 AWG
stranded and solid wire,
compatible with
110 punch down tool

RJ45 Jack

Housing ABS, UL 94V-0
Contact Bracket PC, UL 94V-2, Transparent

RJ45 Contact

Material Phosphor Bronze w/ Nickel Plated
Contact Finish 50µ Gold Plated (Plug contact area)

Printed Circuit Board


Material FR4, UL 94V-0

Operating Temp. -10° to 60° C
(ISO/IEC 11801,
ANSI/TIA/EIA 568 B.2)
Insertion force 20N max (IEC 60603-7-4)
Retention force 7.7 kg between Jack and Plug
Life (mating cycles)
Jack 750 cycles (ISO/IEC 11801,
IEC 60603-7-4)


**CAT5E 24 Port Panel, 110 Type Termination.
19" Rack Mountable, 1 RMU**

FEATURES

- High Impact Patch Panel
- Tough Black Painted Finish
- Number Labeled for Easy Identification
- 568A & 568B Wiring Color Codes
- 110 Type Termination
- ISO/IEC 11801, ANSI/TIA/EIA 568C.2

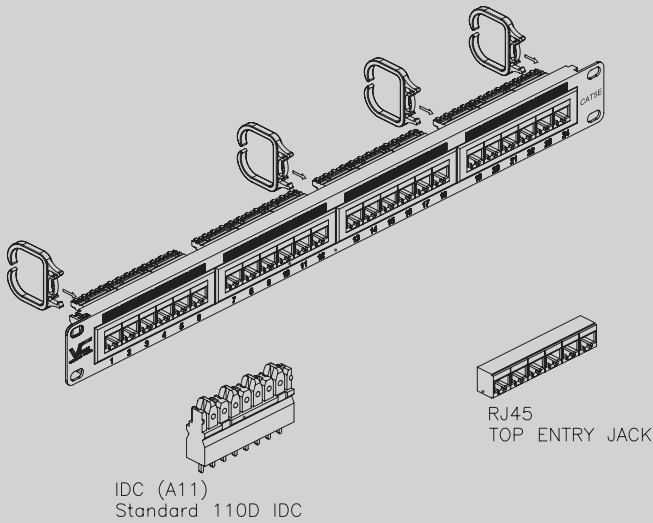

Accessories: Cable Ties
Weight: 1.8 lb

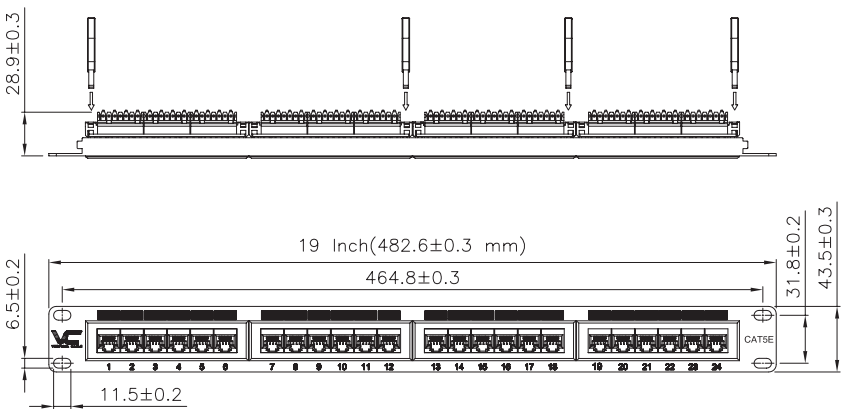

VERTICAL CABLE

951.696.7772 California
800.749.2447 Florida
845.391.8318 New York



www.verticalcable.com

Rev. 01/2021
Subject to change without notice.