# HES<sup>®</sup> 9700 Surface Mounted Electric Strike

Works with Corbin Russwin SecureBolt<sup>®</sup> and Yale SquareBolt<sup>®</sup> exit devices



## The stylish windstorm resistant and fire rated, squarebolt solution.

The HES 9700 Series Electric Strike is a heavy duty, surface mounted electric strike designed to accommodate Corbin Russwin SecureBolt® and Yale SquareBolt® exit devices. All components are completely encased within its 3/4" thick stainless steel housing, so no cutting on the frame is required for installation. It is field selectable for fail secure or fail safe operation, and for 12 or 24 VDC.

The HES 9700 is designed with the strength and durability required to exceed the severe forces of ANSI Windstorm testing. This unique electric strike also complies with NFPA 80-07 guidelines for retrofit into fire rated frames.

### Features

### **Standard Features**

- Installs in metal or wood (wood screws not included)
- Separate base and decorative cover for easy adjustments
- Stainless steel construction
- Tamper resistant

•

- Static strength to 2,000 lbs
- Dynamic strength to 120 ft-lbs
- Endurance 1 million cycles
- Field selectable fail safe/fail secure
  - Horizontal adjustment
- Non-handed
- Internally mounted solenoid
- SecuriCare five-year, no-fault, no questions asked warranty (Addition of HES SMART Pac<sup>®</sup> III extends the warranty to 10 years)

### **Optional Features**

- LBM Latchbolt monitor
- LBSM Latchbolt strike monitor

#### Accessories

- 9000-116-XXX 1/16" Spacer plate (Available in 613E, 628E, 630 & BSP finishes)
- **9000-108-XXX** Spacer plate (BSP, 613E, 630, 628E)
- 9000-MTK Metal template kit
- SMB Surface mounting box
- 2001M Plug-in bridge rectifier
- 2004M ElectroLynx® adapter
- 2005M3 SMART Pac® III
- 2006M Plug-in buzzer





# Specifications

### Certifications


- ANSI/BHMA A156.31, Grade 1
- UL 1034 burglary-resistant listed and suitable for outdoor use
- UL 294 listed
- UL 305 listed
  BoHS compliant
- RoHS compliant
- UL 10C fire rated, 3-hour single door (fail secure only)
- CAN/ULC-S104 fire door conformant
- NFPA-252 fire door compliant
- ASTM-E152 fire door compliant
- California Fire Marshal listed
- NFPA 80-07 compliant
- ANSI/SDI A250.13 windstorm resistant
- Florida Building Code approved TAS 201, 202, 203
- ANSI-ASTM E330

#### **Frame Application**

- Metal
- Wood

### Electrical (DC Continuous Duty)

- Dual voltage 12/24 VDC
- 450 mA at 12 VDC/250 mA at 24 VDC

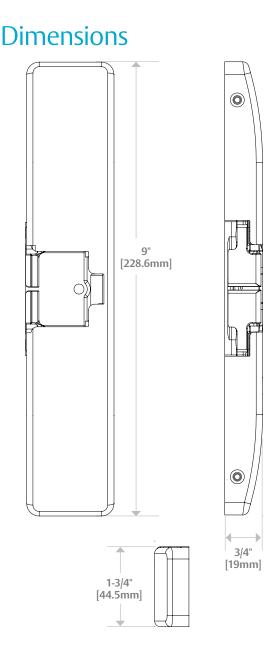

### How to Order

	SERIES	FINISH	OPTION (S)
	9700	- 630	– LBM
	unted Electric Strike for Corbin	605 Bright Brass	LBM Latchbolt Monitor
	cureBolt® and Yale SquareBolt® evices; no faceplates required	606 Satin Brass	LBSM Latchbolt Strike Monitor
Rim Exit De	m Exit Devices; no faceplates required	612 Satin Bronze	
		613 Bronze Toned	
		613E Dark Oxidized Satin Bronze Powder	
		629 Bright Stainless Steel	
		630 Satin Stainless Steel	

NOTE: Electric strike compatibility is determined at time of electric strike product release. ASSA ABLOY is not responsible for incompatibility of products that have changed in design or craftsmanship by their respective manufacturers. When compatibility is a concern, contact Customer Support for application assistance.

Updated 7/7/20 Patent pending and/or patent www.assaabloydss.com/patents

Copyright © 2020, Hanchett Entry Systems, Inc., an ASSA ABLOY Group company. All rights reserved. Reproduction in whole or in part without the express written permission of Hanchett Entry Systems, Inc. is prohibited.