

45ft Reflective Photobeam Sensor

E-931-S45RRQ Range: Up to 45ft (14m)

Features:


- Adjustable response time and sensing range
- 12~250 VAC/VDC Operation
- Current: Up to 70mA@12VDC
- For indoor or outdoor use (IP66)
- Pre-wired 6ft (1.8m) cord
- Mounting hardware included
- Includes 3" round reflector and hood
- Compact size
- New single-gang box and wall-mount brackets available



Specifications:

Model	E-931-S45RRQ
Type	Retro-reflective
Sensing range	0.5'~45' (0.2~14 m)
Voltage supply	12~250 VAC/VDC
Current draw	70mA@12VDC
Response time	5~100 ms (adjustable)
Light source	IR LED
LEDs	Yellow LED (alignment), Red LED (trigger)
Trigger output	SPDT relay output (NO/NC/COM)
Switching capacity	3A@120VAC / 3A@30VDC
Enclosure	IP66 weatherproof
Ambient temperature	-4°~131° F (-20°~55° C)
Mounting brackets	Included

Dimensions:

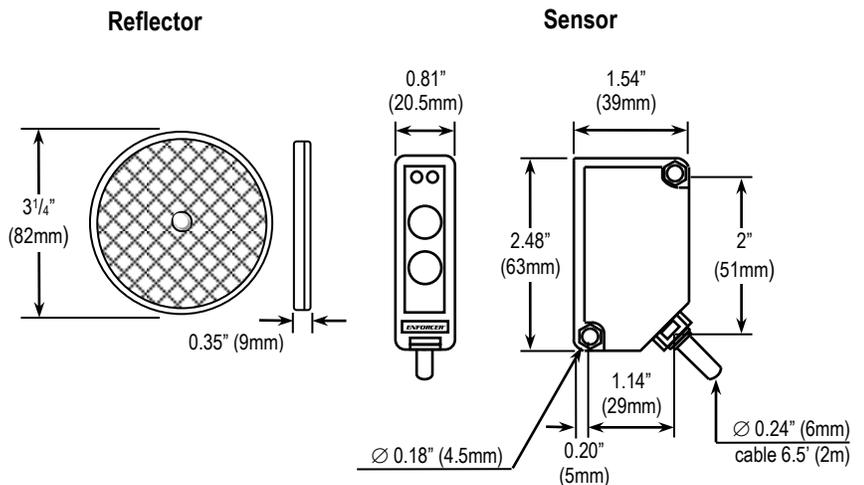

Optional Accessories:

E-931ACC-BLS6Q
Single-gang flush-mount bracket



E931ACC-BLS7Q
L-bracket for side mounting



E931ACC-BLS8Q
Wall bracket



SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright 2014 © SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PIE-931-S45RRQ_141015.docx