


Quam C5/BU/CK1/S

The C5/BU/CK1/S is a complete clock/loudspeaker assembly designed to mount a Sapling analog clock. An 8" O.D., dual cone, high efficiency loudspeaker with 5 ounce magnet is included with the pre-assembled C5/BU/CK1/S. Using a single baffle to mount a loudspeaker and an analog clock facilitates quick installation and simplified connection of field wiring. The analog clock is not included with the C5/BU/CK1/S.

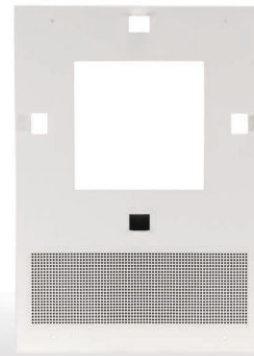

APPLICATION	Intended Use: Program Material: Installation:	Indoor environment Signal tones, voice and music Loudspeaker can be oriented above or below the clock
AUDIO PERFORMANCE	Average Sensitivity: Loudspeaker Power Rating: Maximum Power Rating: Calculated Output: Magnet Type & Weight: Frequency Response: Nominal Coverage Angle: Audio Connection:	92dB SPL, 1W/1M 12W RMS, EIA 426A Standard 15W @ 8 Ohms 99dB SPL, 5W/1M BeFe Ceramic, 5 oz. Nominal 65Hz - 17kHz, EIA 426A Standard 100° Included Angle, -6dB/2kHz, Half Space 7", Color-coded, Pre-tinned Leads
COMPONENT	Baffle Dimensions: Combined Weight: Loudspeaker: Transformer: Finish:	14 1/4" (W) x 18 1/2" (H) x 1/2" (D) 5 lbs. 8C5PAX TBLU: 5W, 25/70V, with 5 taps (0.31W, 0.63W, 1.25W, 2.5W, 5.0W) White powder coat
RECOMMENDED QUAM COMPONENTS	Surface Mount Enclosure: Recessed Mount Enclosure: Add't Components Required:	SE9W ES8-CK Sapling Analog Clocks*

* Sapling clock not included

