

Q2 2021

Product comparison tables

Network video, audio, access control and intercoms

CONTENTS


- 3. Technologies
- 4. Network cameras
 - 4. Fixed box cameras
 - 7. Fixed bullet cameras
 - 9. Modular cameras
 - 12. Fixed dome cameras
 - 20. Pan/tilt/zoom cameras
 - 25. Thermal cameras
 - 26. Explosion-protected cameras
 - 28. Canon network cameras
- 34. Wearables
- 35. Video management software
- 36. Network video recorders
- 37. System devices
- 40. Network intercoms
- 40. Access control
- 41. Network audio
- 42. Accessories
- 43. Analytics

Product naming structure - Guide

This guide explains Axis product naming structure in a comprehensive manner and gives useful information on the product and product features.



[Product naming structure guide](#)

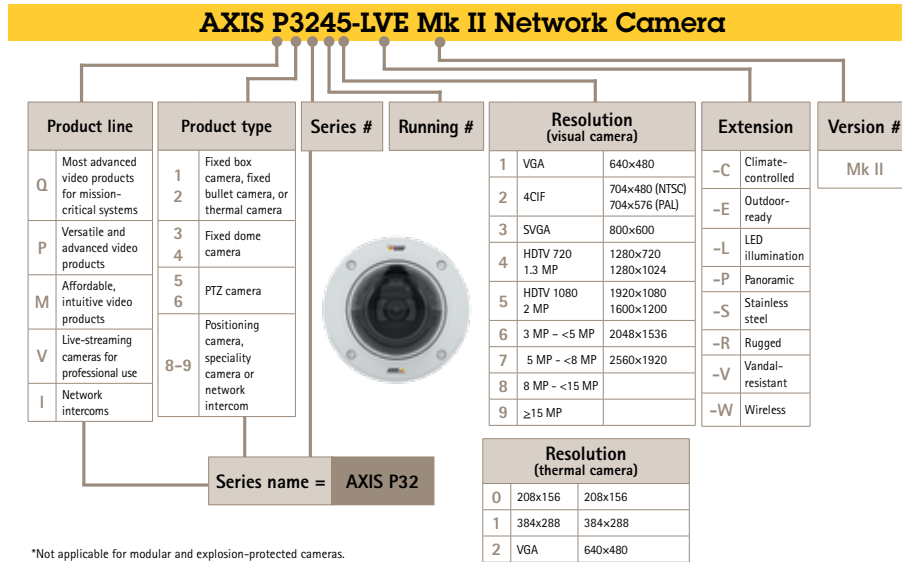

Axis Warranty

5-year warranty for peace of mind

- ◆ 5-year product warranty
- ◆ Trouble-free ownership
- ◆ Better control of overall costs
- ◆ Enhanced RMA support
- ◆ First-class quality and support

Axis 5-year warranty covers most of our product portfolio (see datasheet for exceptions).


For more information, see: [Axis Warranty](#)



Product selector

Go to the Axis product selector to find and compare our products, and choose the ones most suitable for your needs.

[Product selector](#)



AXIS Product Selector





Innovation that makes a difference

Our cutting-edge technologies protect people and businesses under all kinds of circumstances. From extreme weather to challenging light conditions, you can always depend on Axis for innovative surveillance solutions that meet your needs. [Solutions by technology](#)

<u>Zipstream</u> Save bandwidth and space without sacrificing valuable information.	<u>Wide Dynamic Range - WDR</u> For maximum forensic value and usability in scenes with both very bright and very dark areas.	<u>Lightfinder</u> Capture color images in low-light conditions.	<u>OptimizedIR</u> For advanced and powerful camera-integrated IR solutions.	<u>Built-in cybersecurity features</u> Prevent unauthorized access and safeguard your system.	<u>Radar</u> Keep false alarms to a minimum with detection, classification and tracking 24/7.	<u>Thermal imaging</u> Detect and verify in challenging conditions, without compromising privacy.	<u>Electronic image stabilization</u> Minimize the impact of vibration and shaking.	<u>From analog to IP</u> Make the move at your own pace and benefit from the endless possibilities of a network solution.

ONVIF®

Axis products support one or several of the following ONVIF profiles:

- > Profile A – For access control configuration
- > Profile C – For door control and event management
- > Profile G – For edge storage and retrieval
- > Profile S – For basic video streaming
- > Profile T – For advanced video streaming



For more information on ONVIF, please go to: www.axis.com/technologies/onvif or www.onvif.org

Axis fixed box cameras



	AXIS Q16 Series						
	AXIS Q1659 ¹	AXIS Q1647	AXIS Q1647-LE	AXIS Q1645	AXIS Q1645-LE	AXIS Q1615 Mk III	AXIS Q1615-LE Mk III
							
Max. video resolution	5472x3648 (20 MP)	3072x1728 (5.3 MP)	3072x1728 (5.3 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	24 mm: 50.1° 35 mm: 35.5° 50 mm: 25.3° 85 mm: 15° 100 mm: 12.8° 10-22 mm: 96.6°-54° 55-250 mm: 23.2°-5.2° 70-200 mm: 18.2°-6.4°	1/2", i-CS lens, 3.9-10 mm, F1.5, 110° - 44°	1/2", i-CS lens, 3.9 - 10 mm, F1.5, 92° - 44°	1/2", i-CS lens, 3.9-10 mm, F1.5, 109° - 42°	1/2", i-CS lens, 3.9-10 mm, F1.5, 92° - 42°	1/2.8", i-CS lens, 2.8 - 8.5 mm, F1.2, 116° - 40°	1/2.8", i-CS lens, 2.8 - 8.5 mm, F1.2, 102° - 40°
Day and night	✓	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.04/0.004	0.12/0.02	0.12/0.00	0.05/0.01	0.05/0.00	0.05/0.01	0.05/0.00
Max. frames per second	25	50/60	50/60	100/120	100/120	100/120	100/120
Audio support / Built-in mic	✓ / -	✓ / ✓	✓ / -	✓ / ✓	✓ / -	✓ / ✓	✓ / -
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarms	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 4, DC	PoE Class 3, DC	PoE Class 4	PoE Class 3, DC	PoE Class 4	PoE Class 3, DC	PoE Class 4
In-/output ports	2	4	4	4	4	4	4
Operating temperature	0 °C to 45 °C (32 °F to 122 °F)	-20 °C to 60 °C (-4 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-20 °C to 60 °C (-4 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-10 °C to 55 °C (14 °F to 131 °F)	-40 °C to 60 °C (-40 °F to 140 °F) with PoE
Outdoor ready approvals	-	-	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X
WDR	Dynamic contrast	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR
Lightfinder	✓	✓	✓	✓	✓	Lightfinder 2.0	Lightfinder 2.0
Zipstream/H.264/H.265	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / ✓	✓ / ✓ / ✓
Optimized IR / Built-in IR	- / -	- / -	✓ / ✓	- / -	✓ / ✓	- / -	✓ / ✓
Special features	Compatible with EF/EF-S lenses SFP slot	Electronic image stabilization Defogging 1/2" Sensor Orientation aid Shock detection Scene profiles	Electronic image stabilization Defogging 1/2" Sensor Orientation aid Shock detection IK10 Scene profiles	Electronic image stabilization Defogging 1/2" Sensor Orientation aid Shock detection Scene profiles	Electronic image stabilization Defogging 1/2" Sensor Orientation aid Shock detection IK10 Scene profiles	Electronic image stabilization Defogging Shock detection Scene profiles Secure boot Deep-learning processing unit	Electronic image stabilization IK10 Defogging Shock detection Scene profiles Secure boot Deep-learning processing unit

1. Outdoor ready with AXIS T93C10 Outdoor Housing

Axis fixed box cameras

	AXIS P13 Series					
	 AXIS P1378	 AXIS P1378-LE	 AXIS P1377	 AXIS P1377-LE	 AXIS P1375	 AXIS P1375-E
Max. video resolution	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	2592x1944 (5 MP)	2592x1944 (5 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/1.8", 3.9 – 10 mm, F1.5, 119° – 45°	1/1.8", 3.9 – 10 mm, F1.5, 115° – 45°	1/2.7", 2.8 – 8 mm, F1.2, 111° – 38°	1/2.7", 2.8 – 8 mm, F1.2, 90° – 38°	1/2.8", 2.8 – 8 mm, F1.2, 124° – 42°	1/2.8", 2.8 – 8 mm, F1.2, 107° – 42°
Day and night	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.15/0.03	0.15/0.00	0.13/0.03	0.13/0.00	0.05/0.01	0.05/0.01
Max. frames per second	25/30	25/30	25/30	25/30	50/60	50/60
Audio support/ Built-in mic	✓/✓	✓/–	✓/✓	✓/–	✓/✓	✓/–
Included analytics (for Axis analytics, see page 43)	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3, DC	PoE Class 3 (with IR disabled), DC	PoE Class 3, DC	PoE Class 3 (with IR disabled), DC	PoE Class 3, DC	PoE Class 3, DC
In-/output ports	2/2	2/2	2/2	2/2	2/2	2/2
Operating temperature	-10 °C to 55 °C (14 °F to 131 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-10 °C to 55 °C (14 °F to 131 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-10 °C to 55 °C (14 °F to 131 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Outdoor ready approval	-	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR
Lightfinder	✓	✓	✓	✓	Lightfinder 2.0	Lightfinder 2.0
Zipstream/H.264 /H.265	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓
Optimized IR / Built- in IR	-/-	✓/✓	-/-	✓/✓	-/-	-/-
Special features	Video streaming indicator Defogging Shock detection Electronic image stabilization Secure boot	IK10 Video streaming indicator Defogging Shock detection Electronic image stabilization Secure boot	Video streaming indicator Defogging Shock detection Electronic image stabilization Secure boot	IK10 Video streaming indicator Defogging Shock detection Electronic image stabilization Secure boot	Video streaming indicator Defogging Shock detection Electronic image stabilization Secure boot	IK10 Defogging Shock detection Electronic image stabilization Secure boot




Axis fixed box cameras

	AXIS M11 Series						AXIS M10 Series		
	AXIS M1145-L 	AXIS M1134 	AXIS M1135 	AXIS M1135-E 	AXIS M1137 	AXIS M1137-E 	AXIS M1065-L 	AXIS M1065-LW 	AXIS M1045-LW 
Max. video resolution	1920x1080 (2.1 MP)	1280x720 (1.3 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	2592x1944 (5 MP)	2592x1944 (5 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.9", 3 - 10.5 mm, F1.4, 95° - 34°	1/3", 3 - 10.5 mm, F1.4, 90° - 33°	1/3", 3 - 10.5 mm, F1.4, 90° - 33°	1/3", 3 - 10.5 mm, F1.4, 90° - 33°	1/3", 2.8 - 13 mm, F1.4, 112° - 24°	1/3", 2.8 - 13 mm, F1.4, 112° - 24°	1/3", 2.8 mm, F2.0, 110°	1/3", 2.8 mm, F2.0, 110°	1/3", 2.8 mm, F2.0, 110°
Day and night	✓	✓	✓	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.4/0.00	0.15/0.03	0.15/0.03	0.15/0.03	0.17/0.03	0.17/0.03	0.25/0.00	0.25/0.00	0.25/0.00
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30
Audio support/ Built-in mic	- / -	✓ / ✓	✓ / ✓	✓ / -	✓ / ✓	✓ / -	✓ / ✓	✓ / ✓	- / -
Included analytics (for Axis analytics, see page 43)	AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Object Analytics AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3	PoE Class 2, DC	PoE Class 2, DC	PoE Class 2, DC	PoE Class 2, DC	PoE Class 2, DC	PoE Class 2, DC	DC	DC
In-/output ports	1/1	2	2	2	2	2	-	-	-
Operating temperature	0 °C to 50 °C (32 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-25 °C to 50 °C (-13 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-25 °C to 50 °C (-13 °F to 122 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)
Outdoor ready approval	-	-	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	-	-
WDR	Dynamic contrast	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	Forensic Capture	WDR	WDR	WDR
Lightfinder	-	✓	✓	✓	✓	✓	-	-	-
Zipstream/H.264/H.265	- / ✓ / -	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -
Optimized IR/Built-in IR	✓ / ✓	- / -	- / -	- / -	- / -	- / -	- / ✓	- / ✓	- / ✓
Special features	-	Secure boot Video streaming indicator	Secure boot Video streaming indicator	IK10 Secure boot Video streaming indicator	Secure boot Video streaming indicator	IK10 Secure boot Video streaming indicator	Built-in PIR	Built-in PIR WLAN	WLAN

Axis fixed bullet cameras

	AXIS Q.17 Series				AXIS M20 Series	
	AXIS Q1798-LE 	AXIS Q1786-LE 	AXIS Q1785-LE 	AXIS Q1700-LE 	AXIS M2026-LE Mk II 	AXIS M2025-LE 
Max. video resolution	3712x2784 (10.3 MP)	2560x1440 (3.7 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	2688x1520 (4.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	4/3", 12 - 48 mm, F1.7 - 4.0, 90° - 21°	1/1.8", 4.3 - 137 mm, F1.4 - 4.0, 60° - 2.3°	1/2.8", 4.3 - 137 mm, F1.4 - 4.0, 60° - 2.3°	1/2.8", 18 - 137 mm, F2.9 - 4.1, 16° - 2.3°	1/3", 2.4 mm, F2.2, 130°	1/2.8", 2.8 mm, F2.0, 115°
Day and night	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.03/0.00	0.18/0.00	0.16/0.00	0.16/0.00	0.3/0.00	0.2/0.00
Max. frames per second	25/30	50/60	50/60	50/60	25/30	25/30
Optical zoom	4x	32x	32x	8x	-	-
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	- / -	- / -
Included analytics (for Axis analytics, see page 43)	AXIS Object Analytics AXIS Guard Suite Audio detection Gatekeeper AXIS Video Motion Detection Axis Tampering Alarm	AXIS Guard Suite Audio detection Gatekeeper AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection Gatekeeper AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm Gatekeeper	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 4, AC, DC	PoE Class 3, AC, DC	PoE Class 3, AC, DC	PoE Class 3, AC, DC	PoE Class 3	PoE Class 2
In-/output ports	2	2	2	2	-	-
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	WDR	Forensic Capture
Lightfinder	✓	✓	✓	✓	-	-
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / ✓	✓ / ✓ / -
OptimizedIR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / ✓	- / ✓
Special features	Electronic image stabilization IK10 Defogging Secure boot Video streaming indicator	Electronic image stabilization IK10 Defogging	Electronic image stabilization IK10 Defogging	Electronic image stabilization IK10 Defogging Built-in license plate capture assistant Support for installation of third-party edge- or server based LPR analytics,	IK08	IK08

Axis fixed bullet cameras

AXIS P14 Series				
	AXIS P1455-LE 	AXIS P1448-LE 	AXIS P1447-LE 	AXIS P1445-LE-3 Licence Plate Verifier Kit 
Max. video resolution	1920x1080 (2.1 MP)	3840x2160 (8.5 MP)	3072x1728 (5.3 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.8", 3 - 9 mm, F1.6 114° - 37°	1/2.5", 2.8 - 9.8 mm, F1.6, 109° - 37°	1/2.9", 2.8 - 8.5 mm, F1.2, 104° - 36°	1/2.8", 2.8-8.5 mm, F1.2 110° - 38°
Day and night	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.07/0.00	0.18/0.00	0.15/0.00	0.07/0.00
Max. frames per second	50/60	25/30	25/30	50/60
Optical zoom	3x	3.5x	3x	3x
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -
Included analytics (for Axis analytics, see page 43)	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS License Plate Verifier Audio detection AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3
In-/output ports	1/1	1/1	1/1	1/1
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR
Lightfinder	Lightfinder 2.0	✓	✓	✓
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -
Optimized IR/Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓
Special features	IK10 Defogging Shock detection Secure boot Axis Edge Vault	IK10 Shock detection	IK10 Shock detection	IK10 Shock detection

Axis modular cameras

	AXIS F Series										
	AXIS F44 Dual Audio Input	AXIS F41	AXIS F34	AXIS F4005 ²	AXIS F4005-E ²	AXIS F1035-E ²	AXIS F1025 ²	AXIS F1015 ²	AXIS F1005-E ²	AXIS F1004 ² AXIS F1004 Bullet ²	AXIS F1004 Pinhole ²
Max. video resolution	1920x1080 (2.1 MP)	1920x1200 (2.3 MP)	1920x1080 (2.1 MP)	1920x1200 (2.3 MP)	1920x1200 (2.3 MP)	1920x1200 (2.3 MP)	1920x1200 (2.3 MP)	1920x1200 (2.3 MP)	1920x1200 (2.3 MP)	1280x720 (1 MP)	1280x720 (1 MP)
Sensor size/Lens/ Horizontal field of view	-	-	-	1/2.8", 2.8 mm, F2.0, 113°	1/2.8", 2.8 mm, F2.0, 110°	1/2.8", 1.3 mm, F2.8, 194°	1/2.8", 3.7 mm, F2.5, 92°	1/2.8", 3-6 mm, F2.0, 97° - 52°	1/2.8", 2.8 mm, F2.0, 113°	1/4", 2.1 mm, F2.2, 102°	1/4", 3.7 mm, F2.5, 57°
Day and night	-	-	-	-	-	-	-	-	-	-	-
Min. illumination (lux) Color/B&W	-	-	-	0.3/-	0.3/-	0.3/-	0.3/-	0.3/-	0.3/-	0.4/-	0.5/-
Max. frames per second	25/30	50/60	25/30	50/60	50/60	50/60	50/60	50/60	50/60	25/30	25/30
Audio support/ Built-in mic	✓ / -	✓ / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Included analytics (for Axis analytics, see page 43)	Audio detection AXIS Video Motion Detection, Active tampering alarm	Audio detection AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	-	-	-	-	-	-	-	-
Power	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	-	-	-	-	-	-	-	-
In-/output ports	4	4	-	-	-	-	-	-	-	-	-
Operating temperature	-30 °C to 60 °C (-22 °F to 140 °F)	-30 °C to 60 °C (-22 °F to 140 °F)	0 °C to 40° C (32 °F to 104 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-20 °C to 50 °C (-4 °F to 122 °F)/ -20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)
Outdoor ready approvals	-	-	-	-	IP66	IP66/IP67/NEMA 4X	-	-	IP66/IP67/NEMA 4X	-	-
WDR	Forensic Capture	Forensic Capture	Dynamic contrast	Forensic Capture ³	Forensic Capture ³	Forensic Capture ³	Forensic Capture ³	Forensic Capture ³	Forensic Capture ³	WDR	WDR
Lightfinder	-	-	-	-	-	-	-	-	-	-	-
Zipstream/H.264/H.265	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Special features	Supports 4 sensor units Rugged Quad view 2x memory card slots Suited for onboard surveillance	Supports 1 sensor unit Rugged 1x memory card slot Suited for onboard surveillance	Supports 4 sensor units Quad view 2x memory card slots	Standard lens Suited for onboard surveillance	IK09 Standard lens	Fisheye lens Suited for onboard surveillance	Pinhole lens	Varifocal lens	Standard lens Suited for onboard surveillance	Standard lens	Pinhole lens

1. 3D imaging for precision counting. Use with AXIS F34/F44 and AXIS 3D People Counter

2. For use with AXIS F Main Units












3. With AXIS F41/AXIS F44 Main Unit

Axis modular cameras

	AXIS FA Series						
	AXIS FA54	AXIS FA4115 ¹	AXIS FA4090-E ¹	AXIS FA3105-L ¹	AXIS FA1125 ¹	AXIS FA1105 ¹	AXIS FA1080-E ¹
							 NEW
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	208x156	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	208x156
Sensor size/Lens/ Horizontal field of view	-	1/3", 2.8 - 6.0 mm, F2.0, 99 ° - 53°	Uncooled microbolometer Athermalized lens 4 mm, F1.2, 35.4°	1/3", 3.13 mm, F2.0, 103°	1/3", 3.7 mm, F2.5, 91°	1/3", 2.8 mm, F2.0, 111°	Uncooled microbolometer Athermalized lens 2.2 mm, F1.05, 63°, 4 mm, F1.2, 35.4°
Day and night	-	-	-	-	-	-	-
Min. illumination (lux) Color/B&W	-	0.2/-	-	0.2/-	0.25/-	0.2/-	-
Max. frames per second	25/30	25/30	8.3	25/30	25/30	25/30	8.3
Audio support/ Built-in mic	✓ / -	- / -	- / -	- / -	- / -	- / -	- / -
Included analytics (for Axis analytics, see page 43)	Audio detection AXIS Video Motion Detection Active tampering alarm	-	-	-	-	-	-
Power	DC	-	-	-	-	-	-
In-/output ports	4	-	-	-	-	-	-
Operating temperature	0 °C to 45 °C (32 °F to 113 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-30 °C to 55 °C (-22 °F to 131 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-30 °C to 55 °C (-22 °F to 131 °F)
Outdoor ready approvals	-	-	IP66/IP67/NEMA 4	-	-	-	IP66/IP67
WDR	Forensic WDR	Forensic WDR	-	Forensic WDR	Forensic WDR	Forensic WDR	-
Lightfinder	-	-	-	-	-	-	-
Zipstream/H.264/H.265	✓ / ✓ / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -	- / - / -
Optimized IR/Built-in IR	- / -	- / -	- / -	- / ✓	- / -	- / -	- / -
Special features	Supports 4 sensor units 2x memory card slots HDMI™ Quad view	Varifocal lens	-	Standard lens	Pinhole lens	Standard lens	-

1. For use with AXIS FA Main Unit






Axis modular cameras

AXIS P12 Series											
	AXIS P1290-E	AXIS P1280-E	AXIS P1275	AXIS P1265	AXIS P1264	AXIS P1254	AXIS P1245	AXIS P1244	AXIS P1224-E	AXIS P1214	AXIS P1214-E
											
Max. video resolution	208x156	208x156	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)	1280x720 (1 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)	1280x720 (1 MP)	1280x720 (1 MP)	1280x720 (1 MP)
Sensor size/Lens/ Horizontal field of view	Uncooled microbolometer Athermalized lens 4 mm, F1.2, 35.4°	Uncooled microbolometer Athermalized lens 2.2 mm, F1.05, 63°, 4 mm, F1.2, 35.4°	1/2.9", 2.8 - 6 mm, F2.0, 99° - 53°	1/2.9", 3.7 mm, F2.5, 91°	1/4", 3.7 mm, F2.5, 57°	1/4", 2.1 mm, F2.2, 102°	1/2.9", 2.8 mm, F2.0, 111°	1/4", 2.1 mm, F2.2, 102°	1/4", 1.56 mm, F2.8, 145°	1/4", 3.7 mm, F2.5, 57°	1/4", 2.8 mm, F2.0, 81°
Day and night	-	-	-	-	-	-	-	-	-	-	-
Min. illumination (lux) Color/B&W	-	-	0.22/-	0.27/-	0.5/-	0.4/-	0.22/-	0.4/-	1.8/-	1.2/-	1.0/-
Max. frames per second	8.3	8.3	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30
Sensitivity	NETD < 100 mK	NETD < 100 mK	-	-	-	-	-	-	-	-	-
Detection range (m/yard)	166/182 ¹ 511/559 ²	166/182 ¹ 511/559 ²	-	-	-	-	-	-	-	-	-
Audio support/ Built-in mic	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite AXIS Video Motion Detection	AXIS Guard Suite AXIS Video Motion Detection	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm
Power	PoE Class 2	PoE Class 2	PoE Class 2	PoE Class 2	PoE Class 2	PoE Class 2	PoE Class 2	PoE Class 2	PoE Class 2, DC	PoE Class 2, DC	PoE Class 2, DC
In-/output ports	-	-	-	-	-	-	-	-	1/1	1/1	1/1
Operating temperature	Main unit: -20 °C to 50 °C (-4 °F to 122 °F) Thermal sensor unit: -30 °C to 55 °C (-22 °F to 131 °F)	Main unit: -20 °C to 50 °C (-4 °F to 122 °F) Thermal sensor unit: -30 °C to 55 °C (-22 °F to 131 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)
Outdoor ready approvals	IP66/IP67	IP66/IP67	-	-	-	-	-	-	IP66/NEMA 4X	-	IP66/NEMA 4X
WDR	-	-	Forensic Capture	Forensic Capture	WDR	WDR	Forensic Capture	WDR	-	-	-
Lightfinder	-	-	-	-	-	-	-	-	-	-	-
Zipstream/H.264/H.265	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	- / ✓ / -	- / ✓ / -	- / ✓ / -
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Special features	Thermal palettes	Thermal palettes	Varifocal lens	Pinhole lens	Pinhole lens	Standard lens	Standard lens	Standard lens	Standard lens	Pinhole lens	Pinhole lens









1. Detection range measured for humans, 1.8 x 0.5 m, calculated with Johnson's criteria

2. Detection range measured for vehicles, 4 x 1.5 m, calculated with Johnson's criteria










Axis fixed dome cameras

	AXIS Q92 Series	AXIS Q37 Series		AXIS Q36 Series	
	AXIS Q9216-SLV 	AXIS Q3709-PVE 	AXIS Q3708-PVE 	AXIS Q3617-VE 	AXIS Q3615-VE 
Max. video resolution	2304x1728 (4 MP)	3x 3840x2880 (33 MP)	3x 2560x1920 (15 MP)	3072x2048 (6.3 MP)	1920x1200 (2.3 MP)
Sensor size/Lens/ Horizontal field of view	1/2.5", 2.4 mm, F2.0, 125°	3 x 1/2.3", 5 mm, F2.8, 180°	3 x 1/1.8", 5 mm, F2.8, 180°	1/1.8", 4.1 - 9 mm, F1.6, 101° - 46°	1/1.9", 4.1 - 9 mm, F1.6, 100° - 46°
Day and night	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.23/0.05	2/0.4	0.3/0.06	0.15/0.03	0.1/0.02
Max. frames per second	25/30	25/30	25/30	25/30	50/60
Audio support/ Built-in mic	✓ / ✓	- / -	- / -	- / -	- / -
Included analytics (for Axis analytics, see page 43)	Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarms
Power	PoE Class 3	PoE Class 4	PoE Class 4	PoE Class 3	PoE Class 3
In-/output ports	1/1	-	-	-	-
Operating temperature	-20 °C to 50 °C (-4 °F to 122 °F)	-40 °C to 55 °C (-4 °F to 131 °F)	-40 °C to 55 °C (-40 °F to 131 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Outdoor ready approvals	IP66/ IP6K9K/ NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X
WDR	WDR	Dynamic contrast	Forensic Capture	Forensic Capture	Forensic Capture
Lightfinder	-	-	-	✓	✓
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -
Optimized IR/ Built-in IR	- / ✓	- / -	- / -	- / -	- / -
Special features	IK10+ Stainless steel Polygonal privacy masking Shock detection	IK10	1 IP address IK10	Electronic image stabilization IK10 IP6K9K Remote PTRZ Shock detection	Electronic image stabilization IK10 IP6K9K Remote PTRZ Shock detection










Axis fixed dome cameras

	AXIS Q35 Series							AXIS P91 Series
	AXIS Q3527-LVE	AXIS Q3518-LVE	AXIS Q3517-SLVE	AXIS Q3517-LV	AXIS Q3517-LVE	AXIS Q3515-LV	AXIS Q3515-LVE	AXIS P9106-V
								
Max. video resolution	3072x1728 (5.3 MP)	3840x2160 (8.3 MP)	3072x1728 (5.3 MP)	3072x1728 (5.3 MP)	3072x1728 (5.3 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	4:3 ratio: 2016x1512 (3MP)
Sensor size/Lens/ Horizontal field of view	1/1.8", 4.3 - 8.6 mm, F1.5, 96° - 50°	1/1.7", 4.3 - 8.6 mm, F1.5, 93° - 48°	1/1.8", 4.3 - 8.6 mm, F1.5, 96° - 50°	1/1.8", 4.3 - 8.6 mm, F1.5, 96° - 50°	1/1.8", 4.3 - 8.6 mm, F1.5, 96° - 50°	1/2.8", 3 - 9 mm, F1.3, 105 - 36° 1/2.8", 9 - 22 mm, F1.6, 36 - 15°	1/2.8", 3 - 9 mm, F1.3, 105 - 36° 1/2.8", 9 - 22 mm, F1.6, 36 - 15°	1/3", 1.8 mm, F2.4, 130°
Day and night	✓	✓	✓	✓	✓	✓	✓	-
Min. illumination (lux) Color/B&W	0.12/0.00	0.15/0.00	0.12/0.00	0.12/0.00	0.12/0.00	9 mm: 0.07/0.00 22 mm: 0.11/0.00	9 mm: 0.07/0.00 22 mm: 0.11/0.00	0.35/-
Max. frames per second	50/60	25/30	50/60	50/60	50/60	100/120	100/120	25/30
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	- / -
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 3, DC	PoE Class 1
In-/output ports	2	2	2	2	2	2	2	-
Operating temperature	-50 °C to 60 °C (-58 °F to 140 °F)	-50 °C to 60 °C (-58 °F to 140 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-10 °C to 50 °C (14 °F to 122 °F)	-50 °C to 60 °C (-58 °F to 140 °F)	-10 °C to 50 °C (14 °F to 122 °F)	-50 °C to 60 °C (-58 °F to 140 °F)	-15 °C to 50 °C (5 °F to 122 °F)
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X	IP66
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	WDR
Lightfinder	✓	✓	✓	✓	✓	✓	✓	-
Zipstream/H.264/H.265	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -
OptimizedIR/ Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / -
Special features	Electronic image stabilization Defogging IK10+ IP6K9K Shock detection Secure boot TPM	Electronic image stabilization Defogging IK10+ IP6K9K Shock detection	Electronic image stabilization Defogging IK10+ IP6K9K Shock detection Stainless steel casing	Electronic image stabilization Defogging IK10 Shock detection	Electronic image stabilization Defogging IK10+ IP6K9K Shock detection	Electronic image stabilization Defogging IK10 Shock detection	Electronic image stabilization Defogging IK10+ IP6K9K Shock detection	PoE over 2-wire IK10 Ligature-resistant (anti-ligature) design







Axis fixed dome cameras

	AXIS P39 Series					AXIS P38	AXIS P37 Series		
	AXIS P3935-LR	AXIS P3925-R	AXIS P3925-LRE	AXIS P3905-R Mk II	AXIS P3904-R Mk II	AXIS P3807-PVE	AXIS P3719-PLE	AXIS P3717-PLE	AXIS P3715-PLVE
			 NEW						
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	4 x 1920x1080 (8.3 MP)	4 x 2560x1440 (15 MP)	4 x 1920x1080 (8.3 MP)	2x 1920x1080p (2x2 MP)
Sensor size/Lens/ Horizontal field of view	1/2.9", 2.8 mm, F1.6, 110°	1/2.9", 2.8 mm, F1.6, 110°	1/2.9", 6.0 mm, F1.9, 56°	1/2.9", 3.6 mm, F2.0, 87°	1/2.9", 3.6 mm, F2.0, 87°	4 x 1/2.9", 3.2 mm, F2.0, 180°	4 x 1/2.5", 3-6 mm, F1.8-2.6, 4x 101° - 49°	4 x 1/2.8", 2.8-6 mm, F2.0, 4x 96° - 49°	2 x 1/2.8"3 - 6 mm, F1.8 -2.6, 95° -48°
Day and night	✓	✓	✓	-	-	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.06/0.01	0.06/0.01	0.07/0.02	0.06/-	0.06/-	0.17/0.05	0.2/0.00	0.17/0.00	0.17/0.00
Max. frames per second	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30	25/30
Audio support/ Built-in mic	✓/✓	-/-	-/-	-/-	-/-	-/-	-/-	-/-	-/-
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite Blocked view detection Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Blocked view detection AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Shock detection	AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3	PoE Class 2	PoE Class 3	PoE Class 2	PoE Class 2	PoE Class 3	PoE Class 3 w/o IR PoE Class 4 w IR	PoE Class 3 w/o IR PoE Class 4 w IR	PoE IEEE 802.3af/802.3at Type 1 Class 3
In-/output ports	1/1	-	-	-	-	-	-	-	-
Operating temperature	Normal: -40 °C to 55 °C (-40 °F to 131°F) Maximum (intermittent): 70 °C (158 °F)	Normal: -40 °C to 55 °C (-40° F to 131°F) Maximum (intermittent): 70 °C (158 °F)	Normal: -40 °C to 55°C (-40 °F to 131°F) Maximum (intermittent): 70 °C (158 °F)	Normal: -40 °C to 60 °C (-40 °F to 140 °F) Maximum (intermittent): 70 °C (158 °F)	Normal: -40 °C to 60 °C (-40 °F to 140 °F) Maximum (intermittent): 70 °C (158 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/IP6K9K/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP67/NEMA 4X
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic Capture	Forensic Capture	Forensic WDR	WDR	Forensic WDR	Forensic WDR
Lightfinder	✓	✓	✓	✓	✓	✓	✓	✓	✓
Zipstream/H.264/H.265	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓
OptimizedIR/Built-in IR	-/✓	-/-	-/✓	-/-	-/-	-/-	-/✓	-/✓	-/✓
Special features	EN50155, EN45545, and NFPA 130 compliance Electronic Image Stabilization Shock detection 45 fps in 720p IK10 Secure boot Suited for onboard surveillance	EN50155, EN45545, and NFPA 130 compliance Electronic Image Stabilization Shock detection 45 fps in 720p IK10 Secure boot Suited for onboard surveillance	EN50155, EN45545 compliance Electronic Image Stabilization Shock detection 45 fps in 720p IK10+ Secure boot Suited for exterior onboard monitoring	EN50155 compliance IK08 Suited for onboard surveillance	EN50155 compliance IK08 Suited for onboard surveillance	1 IP address IK10 Vertical FoV 90	1 IP address IK09 Remote zoom & focus 2 SD card slots Quadr view Individually controllable IR LEDs	1 IP address IK09 Remote zoom & focus 2 SD card slots Quadr view Individually controllable IR LEDs	1 IP address IK10 Remote zoom & focus 1 SD card slot Individually controllable IR LEDs







Axis fixed dome cameras

	AXIS P32 Series								
	 AXIS P3255-LVE	 AXIS P3248-LV	 AXIS P3248-LVE	 AXIS P3247-LV	 AXIS P3247-LVE	 AXIS P3245-V	 AXIS P3245-VE	 AXIS P3245-LV	 AXIS P3245-LVE
Max. video resolution	1920x1080 (2.1 MP)	3840x2160 (8.3 MP)	3840x2160 (8.3 MP)	2592x1944 (5.0 MP)	2592x1944 (5.0 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.8", 3.4 - 8.9 mm, F1.8, 100° - 36°	1/1.8", 4.3-8.6 mm, F1.5, 100° - 53°	1/1.8", 4.3-8.6 mm, F1.5, 100° - 53°	1/2.7", 3-8 mm, F1.3, 104°-40°	1/2.7", 3-8 mm, F1.3, 104° - 40°	1/2.8", 3.4 - 8.9 mm, F1.8, 100° - 36°	1/2.8", 3.4 - 8.9 mm, F1.8, 100° - 36°	1/2.8", 3.4 - 8.9 mm, F1.8, 100° - 36°	1/2.8", 3.4 - 8.9 mm, F1.8, 100° - 36°
Day and night	✓	✓	✓	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/ B&W	0.1/0.00	0.14/0.00	0.14/0.00	0.13/0.00	0.13/0.00	0.1/0.02	0.1/0.02	0.1/0.00	0.1/0.00
Max. frames per second	50/60	25/30	25/30	25/30	25/30	50/60	50/60	50/60	50/60
Audio support/ Built-in mic	✓ / -	✓ / -	✓ / -	✓ / -	✓ / -	- / -	- / -	✓ / -	✓ / -
Included analytics (for Axis analytics, see page 43)	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Audio detection AXIS Video Motion Detection Active tampering alarm
Power	PoE Class4	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 2	PoE Class 3	PoE Class 3	PoE Class 3
In-/output ports	1/1	1/1	1/1	1/1	1/1	-	-	1/1	1/1
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)
Outdoor ready approvals	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X	-	IP66/NEMA 4X
WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR	Forensic WDR
Lightfinder	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
OptimizedIR/ Built-in IR	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	✓ / ✓	- / -	- / -	✓ / ✓	✓ / ✓
Special features	IK10 Secure boot Deep-learning processing unit Axis Edge Vault	IK10 Secure boot Axis Edge Vault	IK10 Secure boot Axis Edge Vault	IK10 Secure boot Axis Edge Vault	IK10 Secure boot Axis Edge Vault	IK10 Secure boot	IK10 Secure boot	IK10 Secure boot	IK10 Secure boot






Axis fixed dome cameras

	AXIS M42 Series		AXIS M32 Series		AXIS M31 Series	
	AXIS M4206-V 	AXIS M4206-LV 	AXIS M3206-LVE 	AXIS M3205-LVE 	AXIS M3116-LVE 	AXIS M3115-LVE 
Max. video resolution	2048x1536 (3.1 MP)	2048x1536 (3.1 MP)	2304x1728 (4 MP)	1920x1080 (2.1 MP)	2688x1512 (4.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.5", 3 - 6 mm, F2.0, 100° - 45°	1/2.5", 3 - 6 mm, F2.0 - 2.7, 100° - 45°	1/2.5", 2.9 mm, F2.0, 105°	1/2.9", 3.1 mm, F2.0, 100°	1/2.7", 2.4 mm, F2.1, 130°	1/2.9", 2.8 mm, F2.0, 105°
Day and night	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.26/0.05	0.26/0.00	0.22/0.00	0.2/0.00	0.19/0.00	0.17/0.00
Max.frames per second	25/30	25/30	25/30	25/30	25/30	25/30
Audio support/ Built-in mic	- / -	- / -	- / -	- / -	- / -	- / -
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 2	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 3
In-/output ports	-	-	1/1	1/1	-	-
Operating temperature	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)
Outdoor ready approvals	-	-	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	WDR	WDR	WDR	WDR	Forensic WDR	Forensic WDR
Lightfinder	-	-	-	-	✓	✓
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓
OptimizedIR/Built-in IR	- / -	✓ / ✓	- / ✓	- / ✓	- / ✓	- / ✓
Special features	HDMI IK08	HDMI IK08	HDMI IK08	HDMI IK08	IK08 Secure boot	IK08 Secure boot




Axis fixed dome cameras

AXIS M30 Series						
	 AXIS M3075-V	 AXIS M3068-P	 AXIS M3067-P	 AXIS M3066-V	 AXIS M3065-V	 AXIS M3064-V
Max. video resolution	1920x1080 (2.1 MP)	2880x2880 (12 MP)	2016x2016 (6 MP)	2304x1728 (4 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.9", 3.1 mm, F2.0, 102°	1.65 mm, F2.8, 185°	1.56 mm, F2.0, 185°	1/2.5", 2.4 mm, F2.1, 131°	1/2.9", 3.1 mm, F2.0, 102°	1/2.9", 3.1 mm, F2.0, 83°
Day and night	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.2/0.04	0.32/0.06	0.18/0.04	0.23/0.05	0.2/0.04	0.2/0.04
Max. frames per second	25/30	25/30	50/60	25/30	25/30	25/30
Audio support/ Built-in mic	✓/✓	-/-	-/-	-/-	-/-	-/-
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 1	PoE Class 2	PoE Class 2	PoE Class 1	PoE Class 1	PoE Class 1
In-/output ports	-	-	-	-	-	-
Operating temperature	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)
Outdoor ready approvals	-	-	-	-	-	-
WDR	WDR	Forensic WDR	Forensic WDR	WDR	WDR	WDR
Lightfinder	-	-	✓	-	-	-
Zipstream/H.264/H.265	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓
OptimizedIR/ Built-in IR	-/-	-/-	-/-	-/-	-/-	-/-
Special features	HDMI IK08	Dewarped views	Dewarped views	HDMI IK08	HDMI IK08	IK08








Axis fixed dome cameras

	AXIS M30 Series				
	AXIS M3077-PLVE 	AXIS M3058-PLVE 	AXIS M3057-PLVE Mk II 	AXIS M3016 	AXIS M3015 
Max. video resolution	2016x2016 (6 MP image sensor)	2992x2992 (12 MP Image sensor)	2048x2048 (6 MP Image sensor)	2016x1512 (3 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	1/1.8", 1.6 mm, F2.0, 183°	1/1.7", 1.3 mm, F2.2, 181°	1/1.8", 1.6 mm, F2.0, 185°	1/3", 1.8 mm, F2.4, 152°	1/3", 2.8 mm, F2.0, 106°
Day and night	✓	✓	✓	-	-
Min. illumination (lux) Color/B&W	0.16/0.00	0.19/0.00	0.16/0.00	0.35	0.25
Max. frames per second	25/30	25/30	50/60	25/30	25/30
Audio support/ Built-in mic	✓/✓	- / -	- / -	- / -	- / -
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3	PoE Class 3	PoE Class 3	PoE Class 1	PoE Class 1
In-/output ports	1/1	1/1	1/1	-	-
Operating temperature	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	-40 °C to 50 °C (-40 °F to 122 °F)	0 °C to 40 °C (32 °F to 104 °F)	0 °C to 45 °C (32 °F to 113 °F)
Outdoor ready approvals	IP66/NEMA4X	IP66/NEMA 4X	IP66/NEMA 4X	-	-
WDR	Forensic WDR	Forensic WDR	Forensic WDR	WDR	WDR
Lightfinder	✓	✓	✓	-	-
Zipstream/H.264/H.265	✓/✓/✓	✓/✓/ -	✓/✓/ -	✓/✓/✓	✓/✓/✓
OptimizedIR/Built-in IR	✓/✓	✓/✓	✓/✓	- / -	- / -
Special features	HDMI IK10 Distorted views Axis Edge Vault	HDMI IK10 Distorted views	HDMI IK10 Distorted views Axis Edge Vault	-	-

Axis pan/tilt/zoom cameras






	AXIS Q62	AXIS Q61 Series				
	AXIS Q6215-LE	AXIS Q6155-E	AXIS Q6154-E	AXIS Q6135-LE PTZ	AXIS Q6128-E	AXIS Q6100-E
						
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)	1920x1080 (2.1 MP)	3840x2160 (8.3 MP)	2592x1944 (20.4 MP)
Sensor size/Lens/ Horizontal field of view	1/1.9", 6.7 - 201 mm, F1.6 - 5.3 58.6° - 2.2°	1/2.8", 4.3 - 129 mm, F1.6 - 4.7, 66.7° - 2.36°	1/2.8", 4.3 - 129 mm, F1.6 - 4.7 66.7° - 2.36°	1/2.8", 4.3-137.6 mm, F1.4 - 4.0 58.3° - 2.4°	1/2.3", 3.9 - 46.8 mm, F1.8 - 2.0, 70.7° - 6.2°	2.8 mm, F2, 360°
Day and night	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.07/0.00	0.15/0.01	0.15/0.01	0.06/0.00	0.45/0.03	0.3/0.03
Max. frames per second	50/60	50/60	50/60	50/60	50/60	20
Optical zoom	30	30	30	32	12	-
Audio support/ Built-in mic	- / -	- / -	- / -	- / -	- / -	-
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite Active Gatekeeper Autotracking AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Active Gatekeeper Autotracking AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Active Gatekeeper Autotracking AXIS Video Motion Detection Active tampering alarm	Axis Object Analytics AXIS Guard Suite Active Gatekeeper Autotracking AXIS Video Motion Detection	Active Gatekeeper Autotracking AXIS Video Motion Detection Active tampering alarm	Autopilot
Power	PoE Class 4, High PoE SFP midspan included	PoE Class 4, High PoE SFP midspan included	PoE Class 4, High PoE SFP midspan included	PoE Class 4, High PoE SFP midspan included	PoE Class 4, High PoE SFP midspan included	PoE
In-/output ports	-	-	-	-	-	-
Operating temperature	-50 °C to 55 °C (-58 °F to 131 °F)	-55 °C to 50 °C (-67 °F to 122 °F)	-55 °C to 50 °C (-67 °F to 122 °F)	-50 °C to 50 °C (-58 °F to 122 °F)	-50 °C to 50 °C (-58 °F to 122 °F)	-50 °C to 50 °C (-58 °F to 122 °F)
Outdoor ready approvals	IP66/IP68/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	WDR	Forensic capture	Forensic capture	Forensic capture	-	WDR
Lightfinder	✓	✓	✓	✓	-	-
Zipstream/H.264/H.265	✓/✓/ -	✓/✓/ -	✓/✓/ -	✓/✓/✓/✓	✓/✓/ -	✓/✓/✓/✓
OptimizedIR/Built-in IR	✓/✓	- / -	- / -	✓	- / -	- / -
Special features	Electronic image stabilization Built-in wiper MIL-STD-810G IK10 Shock detection	Electronic image stabilization Focus recall IK08 Laser focus,Sharpdome Speed dry Shock detection	Electronic image stabilization Focus recall IK08 Laser focus,Sharpdome Speed dry Shock detection	Electronic image stabilization Focus recall Defogging IK08 Sharpdome Speed dry Shock detection	Electronic image stabilization Focus recall Defogging IK08 Sharpdome Speed dry Shock detection	Directional audio detection Exchangeable lenses IK10

Axis pan/tilt/zoom cameras





AXIS Q60 Series							
	 AXIS Q6075	 AXIS Q6075-SE	 AXIS Q6075-E	 AXIS Q6074	 AXIS Q6074-E	 AXIS Q6055-C	 AXIS Q6010-E
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)	1280x720 (1 MP)	1920x1080 (2.1 MP)	2592x1944 (20.4 MP)
Sensor size/Lens/ Horizontal field of view	1/2.8" 4.25 - 170 mm, F1.6 - 4.95, 62.8° - 2.23°	1/2.8", 4.25 - 170 mm, F1.6 - 4.95, 65.1° - 2.0°	1/2.8" 4.25-170 mm, F1.6-4.95, 65.1° - 2.0°	1/2.8" 4.25-127.5 mm, F1.6-4.2, 63.8° - 2.6° (720p), 49.7° - 1.73° (D1)	1/2.8", 4.25-127.5 mm, F1.6-4.2, 63.8° - 2.6° (720p), 49.7° - 1.73° (D1)	1/2.8", 4.44 - 142.6 mm, F1.6-4.41, 62.8° - 2.23°	1/2.5", 2.8 mm, F2.0, 360°
Day and night	✓	✓	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	0.1/0.002	0.1/0.002	0.1/0.002	0.1/0.002	0.1/0.002	0.3/0.03	0.4/0.03
Max. frames per second	50/60	50/60	50/60	50/60	50/60	50/60	20
Optical zoom	40	40	40	40	40	32	-
Audio support/ Built-in mic	✓ / -	- / -	- / -	✓ / -	- / -	- / -	-
Included analytics (for Axis analytics, see page 43)	AXIS Object Analytics AXIS Guard Suite Active gatekeeper Autotracking 2 AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Active gatekeeper Autotracking 2 AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Active gatekeeper Autotracking 2 AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics, AXIS Guard Suite Active Gatekeeper Audio detection Autotracking AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Active Gatekeeper Audio detection Autotracking AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Active Gatekeeper Autotracking AXIS Video Motion Detection Active tampering alarm	Autopilot
Power	High PoE Midspan included	DC	High PoE SFP midspan included	PoE Class 4, AC, DC Midspan included	High PoE SFP midspan included	DC	PoE
In-/output ports	4	2	-	4	-	2	-
Operating temperature	0 °C to 50 °C (32 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-50 °C to 50 °C (-58 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-50 °C to 50 °C (-58 °F to 122 °F)	-20 °C to 75 °C (-4 °F to 167 °F)	-40 °C to 50 °C (-40 °F to 122 °F)
Outdoor ready approvals	-	IP66/IP67/NEMA 4X/6P	IP66/IP67/NEMA 4X	-	IP66/IP67/NEMA 4X	IP66/NEMA 4X Up to 75 °C (167 °F)	IP66/NEMA 4X
WDR	WDR	WDR	WDR	WDR	WDR	WDR	WDR
Lightfinder	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	Lightfinder 2.0	-	-
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / ✓
Optimized IR/Built-in IR	- / -	- / -	- / -	- / -	- / -	- / -	- / -
Special features	Electronic image stabilization Secure boot FIPS 140-2 certified TPM 2.0 module Orientation aid Automatic defog, Focus recall, IK10 Enter/Exit detector Object counter, Object removed Shock detection Highlight compensation	2xSFP slots for fiber Electronic image stabilization MIL-STD-810G 509.5 Stainless steel. Secure boot FIPS 140-2 certified TPM 2.0 module Orientation aid, Automatic defog Focus recall Enter/Exit detector Object counter, Object removed Shock detection Highlight compensation	Electronic image stabilization Secure boot FIPS 140-2 certified TPM 2.0 module Orientation aid Automatic defog Focus recall, IK10 Enter/Exit detector Object counter, Object removed Shock detection Highlight compensation	Electronic image stabilization Automatic defog Focus recall Object counter, Object removed Shock detection Highlight compensation	Electronic image stabilization Automatic defog Focus recall Object counter, Object removed IK10 Shock detection Highlight compensation	Automatic defog IK10 Enter/Exit detector Fence detector Object counter, Object removed Shock detection Highlight compensation	Exchangeable lenses IK10

1. For integration with AXIS Q60-E PTZ Network Camera Series and AXIS Q61 PTZ Network Camera Series (requires AXIS T94A01C Attachment Kit). 2. Without AXIS PTZ camera







Axis pan/tilt/zoom cameras

	AXIS V59	AXIS P56 Series		AXIS P54 Series	
	AXIS V5925 	AXIS P5655-E 	AXIS P5654-E 	AXIS P5415-E 	AXIS P5414-E 
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2,1 MP)	1280x720 (1 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)
Sensor size/Lens/ Horizontal field of view	1/2.8" 4.4-132 mm, F1.4-4.6, 62°-2.3°	1/2.8", 4.3 - 137.6 mm, F1.4 - 4.0, 58.7° - 2.4°	1/2.8", 4.0 - 84.6 mm, F1.6 - 4.5, 77.0° - 3.6°	1/2.8", 4.7 - 84.6 mm, F1.6 - 2.8, 59° - 4°	1/2.8", 4.7 - 84.6 mm, F1.6 - 2.8, 59° - 4°
Day and night	✓	✓	✓	✓	✓
Min. illumination (lux) Color/B&W	1.0/0.03	0.1/0.02	0.1/0.01	0.5/0.04	0.4/0.04
Max. frames per second	50/60	50/60	50/60	25/30	25/30
Optical zoom	30	32	21	18	18
Audio support/ Built-in mic	✓ / -	✓ / -	- / -	✓ / -	✓ / -
Included analytics (for Axis analytics, see page 43)	AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Advanced Gatekeeper Audio detection AXIS Video Motion Detection Active tampering alarm	AXIS Object Analytics AXIS Guard Suite Advanced Gatekeeper AXIS Video Motion Detection Active tampering alarm	Advanced Gatekeeper Audio detection AXIS Video Motion Detection Active tampering alarm	Advanced Gatekeeper Audio detection
Power	DC	PoE Class 4, AC, DC	PoE Class 4	PoE Class 4, DC	PoE Class 4, DC
In-/output ports	2	4	-	4	4
Operating temperature	0 °C to 40 °C (32 °F to 104 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-30 °C to 50 °C (-22 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)	-20 °C to 50 °C (-4 °F to 122 °F)
Outdoor ready approvals	-	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	-	Forensic WDR	Forensic WDR	-	-
Lightfinder	-	Lightfinder 2.0	Lightfinder 2.0	-	-
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / ✓	- / ✓ / -	- / ✓ / -
OptimizedIR/Built-in IR	- / -	- / -	- / -	- / -	- / -
Special features	2x Canon XLR3 3G-SDI HDMI™ CamStreamer 3-month trial included VISCA support VISCA over IP support Secure boot	Electronic image stabilization Defogging Focus recall IK10 Secure boot Shock detection	Electronic image stabilization Defogging Focus recall IK10 Secure boot	Direct drive pan/tilt system	Direct drive pan/tilt system

Axis pan/tilt/zoom cameras

AXIS M50 Series				
	AXIS M5525-E 	AXIS M5065 Only sold in North America, Japan and Europe (excl. Russia) 	AXIS M5055 	AXIS M5054 
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x720 (1 MP)
Sensor size/Horizontal field of view	1/2.8", 4.7 – 47 mm, F1.6 – 3.0, 61.8° – 6.7°	1/4.85", 2.2 – 11.0 mm, F1.4 – 2.5, 71° – 14°	1/4.85", 2.2 – 11.0 mm, F1.4 – 2.5, 71° – 14°	1/4.85", 2.2 – 11.0 mm, F1.4 – 2.5, 71° – 14°
Day and night	✓	-	-	-
Min. illumination (lux) Color/B&W	0.45/0.01	1.2/-	1.2/-	0.9/-
Max. frames per second	25/30	25/30	25/30	25/30
Optical zoom	10	5	5	5
Audio support/ Built-in mic	✓ / -	✓ / ✓	✓ / ✓	✓ / ✓
Included analytics (for Axis analytics, see page 43)	Advanced gatekeeper Audio detection AXIS Video Motion Detection Active tampering alarm	Audio volume detection Scream detection Removed object detection AXIS Video Motion Detection Active tampering alarm	Audio volume detection Scream detection Removed object detection AXIS Video Motion Detection Active tampering alarm	Audio volume detection Scream detection Removed object detection AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3, DC	PoE Class 3	PoE Class 3	PoE Class 3
In-/output ports	4	-	-	-
Operating temperature	-20 °C to 50 °C (-4 °F to 122 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)	0 °C to 45 °C (32 °F to 113 °F)
Outdoor ready approvals	IP66/NEMA 4X	-	-	-
WDR	Forensic Capture	WDR	WDR	WDR
Lightfinder	-	-	-	-
Zipstream/H.264/H.265	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -	✓ / ✓ / -
Optimized IR/Built-in IR	- / -	- / -	- / -	- / -
Special features	Scene profiles IK09	Wireless I/O connectivity with Z-Wave Plus® devices	Autofocus	Autofocus

Axis pan/tilt/zoom cameras




	AXIS Q87 Series			AXIS Q86 Series		
	AXIS Q8752-E, zoom	AXIS Q8752-E	AXIS Q8685-E	AXIS Q8685-LE	AXIS Q8642-E	AXIS Q8641-E
						
Max. video resolution	Visual: 1920x1080 Thermal: 640x480	Visual: 1920x1080 Thermal: 640x480	1920x1080	1920x1080	640x480	384x288
Sensor size/Lens/ Horizontal field of view	Visual: 1/2.8" progressive scan CMOS, 4.3–138 mm, F1.4–4.0 58.5° – 2.4° Thermal: Uncooled microbolometer Athermalized 35–105 mm, F1.6 18° – 6°	Visual: 1/2.8" progressive scan CMOS, 4.3–138 mm, F1.4–4.0 58.5° – 2.4° Thermal: Uncooled microbolometer Athermalized 35 mm, F1.2 17°	1/2.8", 4.3–129 mm, F1.6–4.7 65.6° – 2°	1/2.8", 4.3–129 mm, F1.6–4.7 65.6° – 2°	Uncooled microbolometer Athermalized 60 mm 10°	Uncooled microbolometer Athermalized 35 mm 10.7°
Day and night	✓	✓	✓	✓	-	-
Min. illumination (lux) Color/B&W	Visual: 0.1/0.02	Visual: 0.1/0.02	0.2/0.01	0.2/0.01	-/-	-/-
Max. frames per second	Visual: 50/60 Thermal: 8.3/30	Visual: 50/60 Thermal: 8.3/30	50/60	50/60	8.3/30 ¹	8.3/30 ¹
Pan/Tilt	360° endless / -90° to 45° -45° to 90° (inverted configuration)	360° endless / -90° to 45° -45° to 90° (inverted configuration)	360° endless / -90° to 45° -45° to 90° (inverted configuration)	360° endless / -90° to 45° -45° to 90° (inverted configuration)	360° endless / -90° to 45°	360° endless / -90° to 45°
Optical zoom	Visual: 32 Thermal: 3	Visual: 32 Thermal: 3	30	30	-	-
Sensitivity	Thermal: NETD < 50 mK	Thermal: NETD < 50 mK	-	-	NETD < 50 mK	NETD < 70 mK
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	Advanced Gatekeeper AXIS Video Motion Detection Active tampering alarm	Advanced Gatekeeper AXIS Video Motion Detection Active tampering alarm	Video Motion Detection	Video Motion Detection
Power	24 V AC/DC	24 V AC/DC	24 V AC/DC	24 V AC/DC	24 V AC/DC	24 V AC/DC
In-/output ports	4	4	4	4	4	4
Operating temperature	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-50 °C to 55 °C (-58 °F to 131 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Outdoor ready approvals	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X	IP66/NEMA 4X
WDR	Visual: Forensic WDR	Visual: Forensic WDR	Forensic Capture	Forensic Capture	-	-
Lightfinder	Lightfinder 2.0	Lightfinder 2.0	-	-	-	-
Zipstream/H.264/H.265	✓ / ✓ / ✓	✓ / ✓ / ✓	✓ / ✓ / -	✓ / ✓ / -	✓	✓
Optimized IR/Built-in IR	- / -	- / -	- / -	- / ✓	- / -	- / -
Special features	FIPS 140-2 level 2 certified TPM, IK10 Electronic image stabilization RJ45 and SFP interfaces Secure boot Axis Edge Vault Visual: Focus recall Thermal palettes Defogging	FIPS 140-2 level 2 certified TPM, IK10 Electronic image stabilization RJ45 and SFP interfaces Secure boot Axis Edge Vault Visual: Focus recall Thermal palettes Defogging	Electronic image stabilization Shock detection Focus recall RJ45 and SFP interfaces	Electronic image stabilization Shock detection Focus recall RJ45 and SFP interfaces	Electronic image stabilization Shock detection Palette setting	Electronic image stabilization Shock detection Palette setting

1. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations

2. Detection range measured for humans, 1.8 x 0.5 m, calculated with Johnson's criteria

3. Detection range measured for vehicles, 4 x 1.5 m, calculated with Johnson's criteria

Axis thermal cameras

	AXIS Q29 Temperature Alarm Camera Series		AXIS Q19 Thermal Network Camera Series			
	AXIS Q2901-E	AXIS Q2901-E PT Mount	AXIS Q1942-E	AXIS Q1942-E PT Mount	AXIS Q1941-E	AXIS Q1941-E PT Mount
						
Max. video resolution	336x256	336x256	640x480	640x480	384x288	384x288
Sensor size/ Lens/ Horizontal field of view	Uncooled microbolometer Athermalized lens 9 mm, F1.25, 35° 19 mm, F1.25, 17°	Uncooled microbolometer 9 mm, F1.25, 35° 19 mm, F1.25, 17°	Uncooled microbolometer Athermalized lens 10 mm, F 1.24, 63° 19 mm, F 1.23, 31° 35 mm, F 1.20, 17° 60 mm, F 1.25, 10°	Uncooled microbolometer Athermalized lens 10 mm, F 1.24, 63° 19 mm, F 1.23, 31° 35 mm, F 1.20, 17° 60 mm, F 1.25, 10°	Uncooled microbolometer Athermalized lens 7 mm, F1.18, 55° 13 mm, F1.0, 28° 19 mm, F1.23, 19.4° 35 mm, F1.2, 10.7° 60 mm, F1.25, 6.2°	Uncooled microbolometer Athermalized lens 7 mm, F1.18, 55° 13 mm, F1.0, 28° 19 mm, F1.23, 19.4° 35 mm, F1.2, 10.7° 60 mm, F1.25, 6.2°
Max. frames per second	8.3	8.3	8.3/30 ¹	8.3/30 ¹	8.3/30 ¹	8.3/30 ¹
Object temperature range	-40 °C to 550 °C (-40 °F to 1022 °F)	-40 °C to 550 °C (-40 °F to 1022 °F)	-	-	-	-
Sensitivity	NETD < 50 mK	NETD < 50 mK	NETD < 50 mK	NETD < 50 mK	NETD < 70 mK	NETD < 70 mK
Detection range (m/yd.)	-	-	10 mm: 291/318 ² 892/978 ³ 19 mm: 573/627 ² 1757/1921 ³ 35 mm: 1079/1179 ² 3307/3617 ³ 60 mm: 1833/2005 ² 5623/6149 ³	10 mm: 291/318 ² 892/978 ³ 19 mm: 573/627 ² 1757/1921 ³ 35 mm: 1079/1179 ² 3307/3617 ³ 60 mm: 1833/2005 ² 5623/6149 ³	7 mm: 200/219 ² 613/671 ³ 13 mm: 393/430 ² 1205/1318 ³ 19 mm: 567/620 ² 1739/1902 ³ 35 mm: 1028/1124 ² 3153/3448 ³ 60 mm: 1774/1940 ² 5441/5951 ³	7 mm: 200/219 ² 613/671 ³ 13 mm: 393/430 ² 1205/1318 ³ 19 mm: 567/620 ² 1739/1902 ³ 35 mm: 1028/1124 ² 3153/3448 ³ 60 mm: 1774/1940 ² 5441/5951 ³
Audio support/ Built-in mic	✓ / -	- / -	✓ / -	- / -	✓ / -	- / -
Included analytics (for Axis analytics, see page 43)	Audio detection AXIS Video Motion Detection	AXIS Video Motion Detection	AXIS Guard Suite Audio detection AXIS Video Motion Detection	AXIS Guard Suite AXIS Video Motion Detection	AXIS Guard Suite Audio detection AXIS Video Motion Detection	AXIS Guard Suite AXIS Video Motion Detection
Power	PoE Class 3, 24 V AC/DC	PoE Class 3, 24 V AC/DC	PoE Class 3, 24 V AC/DC	PoE Class 3, 24 V AC/DC	PoE Class 3, 24 V AC/DC	PoE Class 3, 24 V AC/DC
In-/output ports	2	-	2	-	2	-
Operating temperature	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Outdoor ready approvals	IP66/IP67/NEMA 4X	IP66/NEMA 4X	IP66/IP67/NEMA 4X	IP66/NEMA 4X	IP66/IP67/NEMA 4X	IP66/NEMA 4X
Zipstream/H.264/H.265	-	-	✓	✓	✓	✓
Special features	Isothermal palette Thermal palettes Shock detection	Isothermal palette Thermal palettes RS485/RS422 for pan/tilt control Shock detection	Electronic image stabilization Thermal palettes Shock detection	Electronic image stabilization Thermal palettes RS485/RS422 for pan/tilt control Shock detection	Electronic image stabilization Thermal palettes Shock detection	Electronic image stabilization Thermal palettes RS485/RS422 for pan/tilt control Shock detection

1. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations

2. Detection range measured for humans, 1.8 x 0.5 m, calculated with Johnson's criteria

3. Detection range measured for vehicles, 4 x 1.5 m, calculated with Johnson's criteria

Explosion-protected cameras

	Temperature Alarm		Thermal Positioning	Visual Positioning		Visual PTZ	
	XF60-Q2901	XF40-Q2901	XP40-Q1942	XP40-Q1785	XP40-Q1765	ExCam XPT Q6075	D201-S XPT Q6055
							
Max. video resolution	336x256	336x256	640x480	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Sensor size/Lens/ Horizontal field of view	Uncooled microbolometer Athermalized 19 mm, F1.25, 17°	Uncooled microbolometer Athermalized 19 mm, F1.25, 17°	Uncooled microbolometer Athermalized 19 mm, F1.23, 32°	1/2.8", 4.3 - 137 mm, F1.4 - 4.0, 60° - 2.3°	1/2.9", 4.7 - 84.6 mm, F1.6 - 2.8, 59° - 4°	1/2.8", 4.25 - 170 mm F1.6 - 4.95, 65.1° - 2.0°	1/2.8", 4.44 - 142.6 mm F1.6 - 4.41, 62.8° - 2.23°
Min. illumination (lux) Color/B&W	-/-	-/-	-/-	0.16/ 0.03	0.5/ 0.04	0.1/ 0.002	0.3/ 0.03
Max. frames per second	8.3	8.3	8.3 ¹	50/60	25/30	50/60	50/60
Object temperature range	-40 °C to 550 °C (-40 °F to 1022 °F)	-40 °C to 550 °C (-40 °F to 1022 °F)	-	-	-	-	-
Sensitivity	NETD < 50 mK	NETD < 50 mK	NETD < 50 mK	-	-	-	-
Detection range (m/yd.)	-	-	567/620 ² 1739/1902 ³	-	-	-	-
Optical zoom	-	-	-	32	18	40	32
Included analytics (for Axis analytics, see page 43)	AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite Active Gatekeeper Autotracking AXIS Video Motion Detection Active tampering alarm	Active Gatekeeper Autotracking AXIS Video Motion Detection Active tampering alarm
Power	110 VAC	24 VAC	24 VAC / 110 VAC	24 VAC / 110 VAC / 230 VAC	24 VAC / 110 VAC	PoE Class 4 + 24 VDC SFP midspan included	PoE Class 4, High PoE, SFP midspan included
In-/output ports	-	-	-	-	-	-	-
Operating temperature	-50 °C to 70 °C (-58 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F) -60 C model: -60 °C to 40 °C (-76 °F to 104 °F) -50 C UL model: -50 °C to 70 °C (-58 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F) -60 C model: -60 °C to 40 °C (-76 °F to 104 °F) -50 C UL model: -50 °C to 70 °C (-58 °F to 158 °F)	-40 °C to 60 °C (-40 °F to 140 °F) -60 C models: -60 °C to 40 °C (-76 °F to 104 °F) UL models: -50 °C to 60 °C (-58 °F to 140 °F)	-40 °C to 70 °C (-40 °F to 158 °F) -60 C model: -60 °C to 40 °C (-76 °F to 104 °F) UL model: -50 °C to 70 °C (-58 °F to 158 °F)	-50 °C to 50 °C (-58 °F to 122 °F) (Intermittent up to 60 °C/140 °F)	-20 °C to 50 °C (-4 °F to 122 °F)
Outdoor ready approvals	IP66/IP67	IP66/IP67	IP66/IP67	IP66/IP67	IP66/IP67	IP66/IP67/IP68	IP66
WDR	-	-	-	Forensic WDR	Dynamic contrast	WDR	WDR
Lightfinder	-	-	-	Lightfinder	-	Lightfinder 2.0	-
Zipstream/H.264/H.265	- / - / -	- / - / -	✓ / ✓ / -	✓ / ✓ / -	- / - / -	✓ / ✓ / -	✓ / ✓ / -
Special features	UL-certified Stainless steel Shock detection	Stainless steel Worldwide certifications Shock detection	Electronic image stabilization Stainless steel Worldwide certifications Shock detection	Stainless steel Worldwide certifications	Stainless steel Worldwide certifications	Stainless steel ATEX/IECEX/EAC Ex/IA Zone 1/2/21/22 IIC, IIIC certified Secure boot FIPS 140-2 certified TPM 2.0 module Orientation aid	Stainless steel Class I/II/III, Division 1 and Zone 1 ATEX/IECEX Zone 1/2/21/22 IIB+H2, IIIC certified DROP compliance

1. Up to 30 fps within EU, Norway, Switzerland, Canada, USA, Japan, Australia, New Zealand. Up to 8.3 fps in other countries. Frame rate above 9 fps may be subject to export control regulations





2. Detection range measured for humans, 1.8 x 0.5 m, calculated with Johnson's criteria

3. Detection range measured for vehicles, 4 x 1.5 m, calculated with Johnson's criteria





Explosion-protected cameras

	Visual Fixed Stainless Steel						Visual Fixed Aluminium		
	ExCam XF Q1785	XF60-Q1765	XF40-Q1765	ExCam XF Q1645	ExCam XF P1367	ExCam XF M3016	F101-A XF Q1785	F101-A XF P1377	D101-A XF P3807
									
Max. video resolution	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	3072x1728 (5 MP)	2016x1512 or 2304x1296 (3MP)	1920x1080 (2.1 MP)	3072x1728 (5 MP)	4x 1920x1080 (8.3 MP)
Sensor size/Lens/ Horizontal field of view	1/2.8", 4.3-137 mm, F1.4 - 4.0, 60° - 2.3°	1/2.9", 4.7 - 84.6 mm, F1.6 - 2.8, 59° - 4°	1/2.9", 4.7 - 84.6 mm, F1.6 - 2.8, 59° - 4°	1/2", 3.9 - 10 mm, F1.5, 109° - 42°	1/2.9", 2.8 - 8.5 mm, F1.2, 104° - 36°	1/3", 2.8 mm, F2.0, 69° (4:3) or 92° (16:9)	1/2.8"; 4.3-137 mm, F1.4 - 4.0, 60° - 2.3°	1/2.7", 3.9-10 mm, F1.5, 75° -31°	4 x 1/2.9", 3.2 mm, F2.0, 180°
Min. illumination (lux) Color/B&W	0.16/0.03	0.5/0.04	0.5/0.04	0.03/0.01	0.16/0.03	0.4/ -	0.16/0.03	0.15/0.03	0.17/0.05
Max. frames per second	25/30	25/30	25/30	100/120	25/30	25/30	25/30	180	25/30
Optical zoom	32	18	18	-	-	-	32	-	-
Included analytics (for Axis analytics, see page 43)	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Guard Suite AXIS Video Motion Detection Active tampering alarm	AXIS Video Motion Detection Active tampering alarm
Power	PoE Class 3 + 24 VDC	110 VAC	24 VAC	PoE Class 3 + 24 VDC	PoE Class 3 + 24 VDC	PoE Class 1	PoE Class 3 + 24 VDC	PoE Class 3 + 24 VDC	PoE Class 3
In-/output ports	-	-	-	-	-	-	-	-	-
Operating temperature	-60 °C to 60 °C (-76 °F to 140 °F)	-50 °C to 70 °C (-58 °F to 158 °F)	-40 °C to 70 °C (-40 °F to 158 °F) -60 °C model: -60 °C to 40 °C (-76 °F to 104 °F) UL model: -50 °C to 70 °C (-58 °F to 158 °F)	-60 °C to 60 °C (-76 °F to 140 °F)	-60 °C to 60 °C (-76 °F to 140 °F)	-5 °C to 40 °C (23 °F to 104 °F)	Zone system: -50 °C to 60 °C (-58 °F to 140 °F) Class/Division system: -40 °C to 60 °C (-40 °F to 140 °F)	Zone system: -50 °C to 60 °C (-58 °F to 140 °F) Class/Division system: -40 °C to 60 °C (-40 °F to 140 °F)	-20 °C to 55 °C (-4 °F to 131 °F)
Outdoor ready approvals	IP68	IP66/IP67/IP69	IP66/IP67/IP69	IP68	IP68	IP68	IP66	IP66	IP66/IP67
WDR	Forensic WDR	Dynamic contrast	Dynamic contrast	Forensic WDR	Forensic WDR	WDR	Forensic WDR	Forensic WDR	Forensic WDR
Lightfinder	✓	-	-	✓	✓	-	✓	✓	✓
Zipstream/H.264/H.265	✓/✓/✓	-/-/-	-/-/-	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓	✓/✓/✓
Special features	Stainless steel ATEX/IECEX/EAC Ex/IIA/PESO Zone 1/2/21/22 IIC, IIIC certified Electronic image stabilization Defogging, Wiper	Stainless steel UL-certified	Stainless steel Worldwide certifications	Stainless steel ATEX/IECEX/EAC Ex/IIA/PESO Zone 1/2/21/22 IIC, IIIC certified Certified for Mining i-CS lens Remote zoom and focus	Stainless steel ATEX/IECEX/EAC Ex/IIA/PESO Zone 1/2/21/22 IIC, IIIC certified i-CS lens Remote zoom and focus	Stainless steel, ATEX/IECEX/EAC Ex/IIA/PESO Zone 1,2,21,22 IIC, IIIC certified	Aluminum chassis Class I/II/III Division 1 and Zone 1 ATEX/IECEX Zone 1/2/21/22 IIB+H2, IIIC certified Electronic image stabilization Defogging	Aluminum chassis Class I/II/III Division 1 and Zone 1 ATEX/IECEX Zone 1/2/21/22 IIB+H2, IIIC certified i-CS lens Remote zoom and focus	Aluminum chassis Class I/II/III Division 1 and Zone 1 ATEX/IECEX Zone 1/2/21/22 IIB+H2, IIIC certified 4 sensors, 1 IP address Vertical FoV 90° DROP compliance




Canon fixed network cameras

	VB-H761LVE (H2)	VB-H760VE (H2)	VB-H751LE (H2)	VB-M741LE (H2) <small>Only available in US and Canada</small>
				
Max. video resolution (pixels)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x960 (1.3 MP)
Horizontal field of view	60.4° – 3.2°	60.4° – 3.2°	124.3° – 50.5°	113.4° – 46.5°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	4.7 – 94 mm F1.6 – F3.5 Autofocus 20x optical, 20x digital zoom	4.7 – 94 mm F1.6 – F3.5 Autofocus 20x optical, 20x digital zoom	2.55 – 6.12 mm F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom	2.55 – 6.12 mm F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom
Day and night	✓	✓	✓	✓
Min. illumination (lux)	0.06 (Color) 0.04 (B/W) 0 (with IR light on)	0.06 (Color) 0.003 (B/W)	0.035 (Color) 0.002 (B/W) 0 (with IR light on)	0.02 (Color) 0.001 (B/W) 0 (with IR light on)
Frames per second	30	30	30	30
Pan/Tilt/Zoom	Digital PTZ	Digital PTZ	Digital PTZ	Digital PTZ
Audio support	Two-way	-	Two-way	Two-way
Alarm in-/output	2/2	-	2/2	2/2
Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection
Power	AC/DC PoE IEEE 802.3at Type1/Type2	PoE IEEE 802.3at Type1	AC/DC PoE IEEE 802.3at Type1/Type2	AC/DC PoE IEEE 802.3at Type1/Type2
Outdoor ready	✓ (down to -50°C/-58°F)	✓ (down to -10°C/+14°F)	✓ (down to -50°C/-58°F)	✓ (down to -50°C/-58°F)
Other	Clear IR Mode and built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), IK09, IP66, ONVIF Profile S & G, Hydrophilic Coating II	Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), IK09, IP66, ONVIF Profile S & G, Hydrophilic Coating II	Built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), IP66, ONVIF Profile S & G, Hydrophilic Coating II	Built-in infrared LEDs, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR), IP66, ONVIF Profile S & G, Hydrophilic Coating II




Canon fixed network cameras

	VB-H730F Mk II <small>Only available in EMEA, US and Canada</small>	VB-S910F <small>Only available in EMEA, US and Canada</small>	VB-S905F Mk II <small>Only available in US and Canada</small>	VB-S900F Mk II <small>Only available in EMEA, US and Canada</small>
				
Max. video resolution (pixels)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x960 (1.3 MP)	1920x1080 (2.1 MP)
Horizontal field of view	112.6° – 36.7°	78.6° – 20.8°	96°	96°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/4.85"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	2.8 – 8.4 mm F1.2 – F2.0 Autofocus 3x optical, 4x digital zoom	2.25 – 7.88 mm F1.4 – F2.6 Autofocus 3.5x optical, 4x digital zoom	2.7 mm F1.6 4x digital zoom	2.7 mm F1.6 4x digital zoom
Day and night	✓	✓	✓	✓
Min. illumination (lux)	0.3 (Color) 0.015 (B/W)	0.95 (Color) 0.5 (B/W)	0.4 (Color) 0.2 (B/W)	0.4 (Color) 0.2 (B/W)
Frames per second	30	30	30	30
Pan/Tilt/Zoom	Digital PTZ	Digital PTZ	Digital PTZ	Digital PTZ
Audio support	Two-way	Two-way (with built-in microphone)	✓	✓
Alarm in-/outputs	2/2	1/1	1/1	1/1
Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection, Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection, Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection, Scream Detection
Power	AC/DC PoE IEEE 802.3at Type1	PoE IEEE 802.3af	PoE IEEE 802.3at Type1	PoE IEEE 802.3at Type1
Outdoor ready	-	-	-	-
Other	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S


Canon fixed dome cameras

	VB-H652LVE	VB-H651VE	VB-H651V
			
Max. video resolution (pixels)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Horizontal field of view	122.1° – 50.1°	122.1° – 50.1°	122.1° – 50.1°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	2.55 – 6.12 mm F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom	2.55 – 6.12 mm F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom	2.55 – 6.12 mm F1.2 – F1.8 Autofocus 2.4x optical, 4x digital zoom
Day and night	✓	✓	✓
Min. illumination (lux)	0.035 (Color) 0.002 (B/W) 0 (with IR light on)	0.035 (Color) 0.002 (B/W)	0.035 (Color) 0.002 (B/W)
Frames per second	30	30	30
Pan/Tilt/Zoom	20 presets 360° pan 90° tilt	20 presets 350° pan 150° tilt	20 preset 350° pan 150° tilt
Audio support	Two-way	Two-way	Two-way
Alarm in-/outputs	2/2	2/2	2/2
Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection
Power	AC/DC PoE IEEE 802.3at Type1/Type2	AC/DC PoE IEEE 802.3at Type1	AC/DC PoE IEEE 802.3at Type1
Outdoor ready	✓	✓	-
Other	Ultra wide-angle lens Built-in infrared LEDs Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) IK10, IP66 ONVIF Profile S & G	Ultra wide-angle lens, Motion Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR) IK10, IP66 ONVIF Profile S & G	Ultra wide-angle lens Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) IK10 ONVIF Profile S & G







Canon fixed dome cameras

	VB-S800VE	VB-S805D Mk II <small>Only available in US and Canada</small>	VB-S800D Mk II <small>Only available in EMEA, US and Canada</small>
			
Max. video resolution (pixels)	1920x1080 (2.1 MP)	1280x960 (2.1 MP)	1920x1080 (2.1 MP)
Horizontal field of view	93.8°	95°	95°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	2.7 mm F1.6 4x digital zoom	2.7 mm F1.6 4x digital zoom	2.7 mm F1.6 4x digital zoom
Day and night	✓	✓	✓
Min. illumination (lux)	0.5 (Color) 0.3 (B/W)	0.45 (Color) 0.25 (B/W)	0.45 (Color) 0.25 (B/W)
Frames per second	30	30	30
Pan/Tilt/Zoom	20 presets 350° pan 90° tilt	20 presets 350° pan 90° tilt	20 presets 350° pan 90° tilt
Audio support	Two-way (with built-in microphone)	✓	✓
Alarm in-/output	1/1	1/1	1/1
Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection
Power	PoE IEEE802.3af	PoE IEEE802.3at Type1	PoE IEEE802.3at Type1
Outdoor ready	✓	-	-
Other	Ultra wide-angle lens Ultra Low Dispersion Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) IK10, ONVIF Profile S,	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S

Canon pan/tilt/zoom network cameras

	VB-R13VE (H2)	VB-R13	VB-R12VE (H2)	VB-M50B
		Only available in US and Canada 	Only available in EMEA, US and Canada 	
Max. video resolution (pixels)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1280x960 (1.3 MP)
Horizontal field of view	62.6° – 2.2°	62.6° – 2.2°	62.6° – 2.2°	15.6° – 3.2°
Image sensor	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"	Progressive scan CMOS 1/3"
Lens	4.4 – 132 mm F1.4 – F4.6 Autofocus 30x optical, 20x digital zoom	4.4 – 132 mm F1.4 – F4.6 Autofocus 30x optical, 20x digital zoom	4.4 – 132 mm F1.4 – F4.6 Autofocus 30x optical, 20x digital zoom	17.7 – 88.5 mm F1.8 – F2.4 Autofocus 5x optical, 20x digital zoom
Day and night	✓	✓	✓	✓
Min. illumination (lux)	0.05 (Color) 0.002 (B/W)	0.05 (Color) 0.002 (B/W)	0.05 (Color) 0.002 (B/W)	0.04 (Color) 0.002 (B/W)
Frames per second	30	30	30	30
Pan/Tilt/Zoom	256 presets 360° endless pan 180° tilt	256 presets 360° endless pan 180° tilt	256 presets 360° endless pan 180° tilt	64 presets 348° pan 105° (-90° to +15°) tilt
Audio support	Two-way	Two-way	-	Two-way
Alarm in-/outputs	2/2	2/2	-	2/2
Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection Auto Tracking	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection Auto Tracking	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Auto Tracking	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection Scream Detection
Power	AC/DC PoE IEEE 802.3at Type1/Type2	AC/DC PoE IEEE 802.3at Type1	AC/DC PoE IEEE 802.3at Type1/Type2	AC/DC PoE IEEE 802.3at Type1
Outdoor ready	✓ (down to -50°C / -58°F)	-	✓ (down to -50°C / -58°F)	-
Other	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) IK10, IP66 ONVIF Profile S & G Hydrophilic Coating II	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) ONVIF Profile S & G	Motion Adaptive Noise Reduction Area-Specific Data Size Reduction (ADSR) IK10, IP66 ONVIF Profile S & G Hydrophilic Coating II	Large aperture telephoto lens Clear IR Mode Motion-Adaptive Noise Reduction, Area-Specific Data Size Reduction (ADSR) ONVIF Profile S & G

Canon pan/tilt/zoom network cameras


	VB-H45 <small>Only available in EMEA, US and Canada</small>	VB-H45B <small>Only available in EMEA, US and Canada</small>	VB-M44 <small>Only available in EMEA, US and Canada</small>	VB-M44B <small>Only available in EMEA, US and Canada</small>	VB-S30D Mk II <small>Only available in EMEA, US and Canada</small>	VB-S30VE	VB-S31D Mk II <small>Only available in US and Canada</small>
							
Max. video resolution (pixels)	1920x1080 (2.1 MP)		1280x960 (1.3 MP)		1920x1080 (2.1 MP)	1920x1080 (2.1 MP)	1920x1080 (2.1 MP)
Horizontal field of view	60.4° – 3.2°		60.4° – 3.2°		77.7° – 20.7°	77.1° – 20.6°	95°
Image sensor	Progressive scan CMOS 1/3"		Progressive scan CMOS 1/3"		Progressive scan CMOS 1/4.85"	Progressive scan CMOS 1/4.85"	Progressive scan CMOS 1/3"
Lens	4.7 – 94 mm F1.6 – F3.5 Autofocus 20x optical, 20x digital zoom		4.7 – 94 mm F1.6 – F3.5 Autofocus 20x optical, 20x digital zoom		2.25 – 7.88 mm F1.4 – F2.6 Autofocus 3.5x optical, 4x digital zoom	2.25 – 7.88 mm F1.4 – F2.6 Autofocus 3.5x optical, 4x digital zoom	2.7 mm F1.6 4x digital zoom
Day and night	✓		✓		✓	✓	✓
Min. illumination (lux)	0.05 (Color) 0.003 (B/W)		0.05 (Color) 0.003 (B/W)		0.95 (Color) 0.5 (B/W)	1.0 (Color) 0.55 (B/W)	0.45 (Color) 0.25 (B/W)
Frames per second	30		30		30	30	30
Pan/Tilt/Zoom	64 presets 340° pan 100° (-90° to +10°) tilt		64 presets 340° pan 100° (-90° to +10°) tilt		64 presets 350° pan 90° (-90° to 0°) tilt	64 presets 350° pan 90° (-90° to 0°) tilt	64 presets 350° pan 90° (-90° to 0°) tilt
Audio support	Two-way		Two-way		✓	Two-way (with built-in microphone)	✓
Alarm in-/outputs	2/2		2/2		1/1	1/1	1/1
Analytics	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection, Intrusion Detection Volume Detection, Scream Detection		Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection, Intrusion Detection Volume Detection, Scream Detection		Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection, Scream Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection	Moving Object Detection Abandoned Object Detection Removed Object Detection Camera Tampering Detection Passing Detection Intrusion Detection Volume Detection, Scream Detection
Power	AC/DC PoE IEEE 802.3at Type1		AC/DC PoE IEEE 802.3at Type1		PoE IEEE 802.3at Type1	PoE IEEE 802.3af	PoE IEEE 802.3at Type1
Outdoor ready	-		-		-	✓	-
Other	Silver	Black	Silver	Black	Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S	Motion Adaptive Noise Reduction, Area-specific Data Size Reduction (ADSR) IK10, IP66 ONVIF Profile S	Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S
	Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S		Motion Adaptive Noise Reduction Area-specific Data Size Reduction (ADSR) ONVIF Profile S				





Axis body worn camera solution

The Axis body worn camera solution includes a lightweight and robust camera, docking stations (8-bay or 1-bay), a system controller, a video management system (VMS) or an evidence management system (EMS). However, open standards make the hardware system easy to integrate with any VMS or EMS, including users' existing systems. So it is flexible and highly scalable. The fact that the docking station and system controller are separate units further increases scalability. All data is encrypted both at rest and in transfer using AES256 and TLS. In addition, video data can be fully end-to-end encrypted with specific integrations.

- > Easy integration with any VMS, EMS
- > Scalable and cost effective
- > Fast reliable video and data offloading
- > Meets FBI cybersecurity standards

Body worn	
AXIS W100 Body Worn Camera	
	
Max. video resolution	1920x1080
Image sensor size and sensitivity/ Lens/Horizontal field of view	1/2.9", 0.1 lux 2.1 mm, F2.1 141°
Day and night	-
Max. frames per second	30
Audio support/Built-in mic	- / 2
Battery	3600mAh
Operating temperature	-20 °C to 55 °C (-4 °F to 131 °F)
Outdoor ready approvals	IP67
WDR	WDR
Lightfinder	-
Zipstream for body worn/ H.264/H.265	✓ / ✓ / -
OptimizedIR/Built-in IR	-
Recording time	Typical 12h operating time Up to 17h operating time, Up to 30h storage time
Storage size/Encryption	64GB AES256
Positioning system	GPS, Galileo, GLONASS
Sensors	6-axis gyro and accelerometer
Wireless	IEEE 802.11 b/g/n BLE 4.1

Body worn	
AXIS TW1200 Body Worn Mini Bullet Sensor	
	
Max. video resolution	1920x1080
Image sensor size and sensitivity/ Lens/Horizontal field of view	1/2.9", 0.1 lux 2.1 mm, F2.1 141°
Day and night	-
Max. frames per second	30
Audio support/Built-in mic	- / -
Operating temperature	-20 °C to 55 °C (-4 °F to 131 °F)
Outdoor ready approvals	IP67
WDR	WDR
Lightfinder	-
Zipstream for body worn/ H.264/H.265	✓ / ✓ / -
OptimizedIR/Built-in IR	-

Body worn	
AXIS W800 System Controller	
	
Storage size/Encryption	480 GB AES256
Power	Max 16W 12 V DC
Connectors	Uplink: RJ45 10/100/1000 Mbps Device network: 5x RJ45 10/100/1000 Mbps USB 2.0
Operating temperature	0 °C to 40 °C

AXIS Companion

Keep your business safe with an easy-to-use surveillance solution.

With AXIS Companion, you can monitor your whole premises onsite, and even on-the-go using a mobile app with alert notifications. A tight integration of network cameras, audio and door stations ensure you will get the most out of your surveillance system. Flexible options provide a reliable solution that's ready to scale for any business need.



www.axis.com/products/axis-companion

AXIS Camera Station

Protect your premises, improve your business.

AXIS Camera Station is a video and access control management software for surveillance and security specially developed for small and mid-sized installations. Retail stores, hotels, schools and manufacturing industries are just some of the companies that enjoy full control and protection of their premises and can quickly take care of incidents. All to make businesses run more smoothly. AXIS Camera Station matches our other network video products and features to offer you a complete, flexible, safe and reliable system.











www.axis.com/products/axis-camera-station

	AXIS Companion	AXIS Camera Station
		
General		
Product compatibility	Axis total portfolio (as from firmware 5.50)*	Axis total portfolio, third-party devices**
Supported OS	Windows, iOS, Android	Windows, iOS, Android
Licenses	Free	Licensed
Multi-site support	✓	✓
Live view	Up to 16 cameras (1,4,9 and 16 split views and full screen), Axis corridor format, camera sequence, digital PTZ, PTZ Control	Flexible live view configuration, Axis corridor format, camera sequence, digital PTZ, dewarp, multiple monitors, hot spot, site map, web page, PTZ Control integration, Timeline visualization with date and time
Audio streaming	Two way audio streaming, full duplex for Axis devices. Echo cancellation and noise reduction.	Two way audio streaming, full duplex for Axis devices, one way for third party cameras, echo cancellation, and noise reduction
Event management		
Event triggers	Events triggered by Video Motion Detection, Guard Suite, Object analytics	Various triggers including motion detection, active tampering alarm, system event and error, input/output, action button, AXIS Entry Manager event, external HTTPS and device event including AXIS Guard Suite, AXIS Perimeter Defender, Axis and third-party Applications
Event action	Record, Push notification to mobile devices, Visual notification	Record, visual notification, audible alert, switch to camera/view Go to PTZ preset, email, alarm procedure, external I/O acknowledgement of alarms, HTTP notification
Security		
Axis Secure remote access	✓	✓
Event log	-	✓
Investigation and export		
Export	Single images in jpeg, video sequences ASF or MP4, Installation-free stand alone player included, Digital signature on exported recordings	Single images in jpeg, video sequences ASF, MP4 or MKV, Installation-free stand alone player included, Digital signature on exported recordings, Manual or scheduled export
Play back	Play back speed up to 8x frame by frame, search for recordings based on camera, date and time via timeline visualization	Search for recordings based on camera, date and timeline visualization, smart search, video scrubbing, bookmarks, locking of prioritized recordings Up to 64x or frame by frame Up to 36 cameras synchronized playback Single images in JPEG format, Video in ASF format.
AXIS Camera Station Secure Entry		
Access control	-	Configuration: Cardholder with photo, support for Card, PIN and Duress PIN, cardholder groups, schedule door unlock, copy door configuration, card formats, identification method. Management: Qualified for 10.000 cardholders, access rules, zones, schedules, access verification, remote door control, access control event log with video



*Except for AXIS Camera station specific recorders, AXIS S11 series and AXIS S22 series
**Support for key functions of the IEC 62676-2-3 standard

For Axis partner applications, please visit: www.axis.com/products/video-management-software

Network video recorders

	AXIS S30	AXIS S22 Series				AXIS S11 Series				
	AXIS S3008 	AXIS S2224 	AXIS S2216 	AXIS S2212 	AXIS S2208 	AXIS S1148 	AXIS S1132 	AXIS S1132 Tower 	AXIS S1116 Racked 	AXIS S1116 MT 
Licenses	0 included	24 included	16 included	12 included	8 included	48 included	32 included	32 included	16 included	16 included
Supported RAID levels Default RAID level	-	0, 1, 10 (No RAID by default)	0, 1, 10 (No RAID by default)	Not supported	Not supported	0, 1, 5, 6, 10 Default 24 TB: 5 64 TB: 5 140 TB: 6	0, 1, 5, 6, 10 Default: 5	0, 1, 5, 6, 10 Default: 5	0, 1 (No RAID by default)	0, 1 (No RAID by default)
Recording storage	2 / 4 / 8 TB	12 TB (2x6 TB)	8 TB (2x4 TB)	6 TB (1x6 TB)	4 TB (1x4 TB)	24 TB: 6 x 4 TB (20 TB usable space after RAID) 64 TB: 8 x 8 TB (56 TB usable space after RAID) 144 TB: 12 x 12 TB (120 TB usable space after RAID)	4x 4TB (12TB usable space after RAID)	32 TB: 4 x 8 TB (24 TB usable space after RAID) 64 TB: 8 x 8 TB (56 TB usable space after RAID)	8 TB (1x8 TB)	8 TB (1x8 TB)
Operating system	-	Microsoft® Windows® 10 IoT Enterprise								
Validated video streams	-	24 split views or 1x 4K Ultra HD views	16 split views or 1x 4K Ultra HD views	12 split views or 1x 4K Ultra HD views	8 split views or 1x 4K Ultra HD views	Not intended for local viewing of video. Recommended to use Axis desktop terminals.	Not intended for local viewing of video. Recommended to use Axis desktop terminals.	Live view: 1 stream x 4K at 30 fps 4 split x 1080p at 30 fps 9 split x 720p at 15 fps 24 split x 360p at 15 fps Any of the above for max two 4K monitors Playback: Any of the above on one monitor	Not intended for local viewing of video. Recommended to use Axis desktop terminals.	25 split views or 1x 4K Ultra HD views
Validated recording bitrate	Up to 8 video channels 160 Mbit/s	Up to 24 video channels 384 Mbit/s	Up to 16 video channels 384 Mbit/s	Up to 12 video channels 192 Mbit/s	Up to 8 video channels 192 Mbit/s	Up to 64 video channels 512 Mbit/s	Up to 48 video channels 384 Mbit/s	Up to 48 video channels 384 Mbit/s	Up to 32 video channels 256 Mbit/s	Up to 32 video channels 256 Mbit/s
Redundant power supply	-	-	-	-	-	✓	✓	-	-	-
Network connectors	Rear side: 8x PoE ports 10/100 Mbps 1x uplink 10/100/1000 Mbps	Rear side Switch: 24x PoE ports 10/100 Mbps Uplinks: 1x SFP 10/100/1000 Mbps 1x RJ45 10/100/1000 Mbps Rear side Server: 1x RJ45 10/100/1000 Mbps	Rear side Switch: 16x PoE ports 10/100 Mbps Uplinks: 1x SFP 10/100/1000 Mbps 1x RJ45 10/100/1000 Mbps Rear side Server: 1x RJ45 10/100/1000 Mbps	Rear side Switch: 12x PoE ports 10/100 Mbps Uplinks: 1x SFP 10/100/1000 Mbps 1x RJ45 10/100/1000 Mbps Rear side Server: 1x RJ45 10/100/1000 Mbps	Rear side Switch: 8x PoE ports 10/100 Mbps Uplinks: 1x SFP 10/100/1000 Mbps 1x RJ45 10/100/1000 Mbps Rear side Server: 1x RJ45 10/100/1000 Mbps	Rear side: 2x Ethernet (RJ45) 1 GbE	2x Ethernet (RJ45) 1 GbE	2x Ethernet (RJ45) 1 GbE	1x Ethernet (RJ45) 1 GbE 1x Ethernet (RJ45) 10 GbE	1x Ethernet (RJ45) 1 GbE
Other connectors	Side: 1x USB 3.0	Front side: 1x USB 3.0 1x Audio line in 1x Audio line out Rear side Server: 2x USB 2.0 1 Displayport™ 1 HDMI port	Front side: 1x USB 3.0 1x Audio line in 1x Audio line out Rear side Server: 2x USB 2.0 1 Displayport™ 1 HDMI port	Front side: 1x USB 3.0 1x Audio line in 1x Audio line out Rear side Server: 2x USB 2.0 1 Displayport™ 1 HDMI port	Front side: 1x USB 3.0 1x Audio line in 1x Audio line out Rear side Server: 2x USB 2.0 1 Displayport™ 1 HDMI port	Front side: 1x USB 3.1 Type-C 2x USB 2.0 1x VGA Rear side: 2x USB 3.1 1x VGA 1x Serial port	Front side: 1x USB 2.0 Rear side: 2x USB 2.0 1x VGA 1x Serial port	Front side: 1x USB 3.1 Rear side: 2x USB 3.1 4x USB 2.0 3x Mini DisplayPort™ (max two monitors recommended)	Front side: 2x USB 3.1 1x USB 3.1 Type-C 1x Universal audio jack 1x SD card reader Rear side: 2x USB 3.1 Type-C / DisplayPort™ 1x Serial port	Front side: 1x Universal audio jack 2x USB 2.0 1x USB 3.1 1x USB 3.1 Type-C Rear side: 2x USB 2.0 4x USB 3.1 2x DisplayPort™ 1.2 1x Audio line out 1x Serial port
Supported monitors	0	Live view: 2	Live view: 2	Live view: 2	Live view: 2	Complete with desktop terminal	Complete with desktop terminal	Live view: 2	Complete with desktop terminal	Live view: 2
Mounting accessories	AXIS TS3001 Recorder Mount	Rack rails	Rack rails	TS2901 (not included)	TS2901 (not included)	Rack mounting brackets	Rack mounting brackets	-	Rack mounting brackets	-

Network video recorders







Desktop terminals		
	AXIS S9101 MkII	AXIS S9002 Mk II
		
Included software	AXIS Camera Station client	AXIS Camera Station client
Operating system	Microsoft® Windows® 10 IoT Enterprise	
Live video streams	<p>Live view:</p> <p>4K monitor in one of the following split scenarios:</p> <ul style="list-style-type: none"> 1 stream at 4K resolution @ 30 fps 4 streams at 1080p resolution @ 30 fps 9 streams at 720p resolution @ 30 fps 24 streams at 360p resolution @ 15 fps <p>Playback (one 4K monitor):</p> <p>Supports the same split scenarios as live view streaming</p>	<p>Live view:</p> <p>4 x 4K monitors in one of the following split scenarios:</p> <ul style="list-style-type: none"> 1 split at 4K full screen @ 25 fps 4 split at 1080p @ 20 fps 9 split at 720p @ 15 fps <p>Playback:</p> <p>Limited to 1 monitor but supports the same split scenarios as for live view.</p>
Power	Max: 60 W AC Adapter 100 - 240 V AC	Max: 300 W 100 - 240 V AC
Connectors	<p>Front side:</p> <p>2x USB 3.1 1x Audio line in 1x Audio line out</p> <p>Rear side:</p> <p>2x USB 3.1 1x Ethernet (RJ45) 1 GbE 2x DisplayPort™ 1.2</p>	<p>Front side:</p> <p>1x USB 3.1 1x USB 3.1 Type-C 2x USB 2.0 1x Universal audio jack</p> <p>Rear side:</p> <p>4x USB 3.1 2x USB 2.0</p> <p>2x DisplayPort™ 1.2 (not preferred) 4x Mini DisplayPort™ 1x Ethernet (RJ45) 1 GbE</p> <p>1x Audio line out 1x Serial port PS2 Mouse and keyboard ports</p>
Supported monitors	2	4
Included services	Standard replacement service (RMA)	Onsite hardware replacement service
Other	Can complement AXIS S1116 Racked, AXIS S1132 or AXIS S1148	Can complement AXIS S1116 Racked, AXIS S1132 or AXIS S1148

System devices



	<h3>People counters</h3> <p>People counting for operational efficiency</p>	AXIS P8815-2 3D People Counter
	<h3>I/O devices</h3> <p>Enhanced security with wired sensors for both indoor and outdoor</p>	AXIS T834 Wireless I/O Series AXIS T8331 PIR Motion Detector AXIS T8331-E PIR Motion Detector AXIS P8221 Network I/O Audio Module AXIS A91 Network I/O Relay Module Series
	<h3>Decoders</h3> <p>Make it possible to display multiple camera video streams to a public view monitor</p>	AXIS P7701 Video Decoder AXIS T8705 Video Decoder
	<h3>Security radars</h3> <p>Accurate breach detection</p>	AXIS D2110-VE Security Radar
	<h3>Portcast devices</h3> <p>Provides Axis cameras with additional functionality</p>	AXIS T6101 Audio and I/O Interface AXIS T6112 Audio and I/O Interface

System devices






Switches

	AXIS T8524	AXIS T8516	AXIS T8508	AXIS T8504-E	AXIS T8504-R	AXIS D8004
						
Power over Ethernet+ (PoE+) Port Count	24	16	8	4 (2x PoE++)	4 (4x PoE++)	4
Power over Ethernet (PoE) total output power	370 W	240 W	130 W	150 W	240 W	60 W
SPF enabler	✓	✓	✓	✓	✓	✓
Gigabit Ethernet	✓	✓	✓	✓	✓	-
Rack mount	✓	✓	With AXIS T85 Rack Mount Kit A	-	-	-
Outdoor ready	-	-	-	✓	-	-



Video encoders

	AXIS 291 1U	AXIS Q7920
		
Number of slots	3	14
Blades supported	AXIS Q7436 AXIS Q7414 AXIS P7224	AXIS Q7436 AXIS Q7414 AXIS P7224
Maximum number of channels	18	84
Rack size	1U	5U
Rack width (inch)	19	19
Built-in power supply	Power supply	Two redundant power supplies
Network	One Ethernet 10BASE-T/100BASE-TX/1000BASE-T (Gigabit Ethernet) port	Four Ethernet 10BASE-T/100BASE-TX/1000BASE-T (Gigabit Ethernet) ports, Four SFP slots

System devices

	Video encoders									
	AXIS Q7436	AXIS Q7424-R Mk II	AXIS Q7414	AXIS Q7411	AXIS P7304	AXIS P7224	AXIS P7216	AXIS M7104	AXIS M7016	AXIS M7011
										
Max. video resolution	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL) TVI, high definition CVI and high definition analog HD (1280x720 and 1920x1080)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)	720x480 (NTSC) 720x576 (PAL)
Max. frames per second	50/60	25/30	25/30	50/60	25/30	25/30	25/30	25/30	25/30	25/30
Video source (BNC composite inputs)	6	4	4	1	4	4	16	1	16	1
Audio support	-	✓	✓	✓	✓	✓	✓	-	-	-
Configurable in-/outputs	2 per channel	4	2 per channel	4	4	4	4 per channel	-	-	-
Product specific analytics	AXIS Video Motion Detection, Active tampering alarm, AXIS Camera Application Platform	Audio detection, AXIS Video Motion Detection, Active tampering alarm, AXIS Camera Application Platform	Audio detection, AXIS Video Motion Detection, Active tampering alarm, AXIS Camera Application Platform	Audio detection, AXIS Video Motion Detection, Active tampering alarm, AXIS Camera Application Platform	Audio detection, AXIS Video motion Detection, Active tampering alarm, AXIS Camera Application Platform	Audio detection, AXIS Video Motion Detection, Active tampering alarm	Audio detection, AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm AXIS Camera Application Platform	AXIS Video Motion Detection, Active tampering alarm	AXIS Video Motion Detection, Active tampering alarm
Pan/tilt/zoom support	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Power	DC	DC, PoE	DC	DC, PoE	PoE, DC	DC	AXIS PS-P power supply (included)	PoE, DC	AXIS PS-P power supply (included)	PoE
Serial connectors	RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485	RS-422/RS-485
Type	Blade	Standalone	Blade	Standalone	Standalone	Blade	Standalone, Rackmount	Standalone	Standalone, Rackmount	Standalone
Special features	Zipstream Coax PTZ control	Rugged, Operating conditions -40°C - 75 °C (-40 °F - 167 °F), SFP slot	-	Coax PTZ Control	Zipstream HD Analog support	-	SFP slot	Zipstream	-	Zipstream

Network intercoms




	AXIS A8207-VE Mk II 	AXIS A8105-E 	AXIS A8004-VE 	AXIS I8016-LVE  NEW
Max. video resolution	3072x2048 (6.3 MP)	1920x1200	1280x960	2592x1944
Horizontal field of view	180°	180°	97°	140°
Dimensions (H x D x W)	248 x 106 x 51 mm (9 3/4 x 4 3/16 x 2 in)	147.5 x 35 x 48 mm (5.81 x 1.38 x 1.89 in)	260 x 140 x 55.5 mm (10 x 5.5 x 2.2 in)	124 x 124 mm (4.9 in X 4.9 in)
Max. frames per second	25/30	50/30	25/30	30/25
Min. illumination (lux) Color/B&W	0.55/-	1.96/-	0.4/-	0.16/-
Audio support	✓	✓	✓	✓
Built-in mic	✓	✓	✓	✓
Built-in speaker	✓	✓	✓	✓
Ports	2x Relay output, 4x I/O, Line in/out	1x Relay output, 2x I/O	2x Relay output, 4x I/O, Line out	1x Relay output, 2x I/O, Line-in/out
Reader	RFID Reader (with HID® iClass® support)	-	-	-
Reader protocol	Wiegand, RS485 (OSDP), VAPIX® Reader Interface	-	-	-
Included analytics	Audio detection, Shock detection, Video Motion Detection	Audio detection, Shock detection, Video Motion Detection	Audio detection, Shock detection, Video Motion Detection	Audio detection, Shock detection, Video Motion Detection
Power	DC, PoE Class 3, PoE Class 4	PoE Class 3	DC, PoE, PoE+	PoE Class 3
Operating temperature	-40 °C to 55 °C (-40 °F to 131 °F)	-25 °C to 55 °C (-13 °F to 131 °F)	-25 °C to 50 °C (-13 °F to 122 °F)	-40 °C to 60 °C (-40 °F to 140 °F)
Outdoor ready approvals	IP66/NEMA 4X	IP65/NEMA 4X	IP66/IP67/NEMA 4X	IP66/IP69-*, NEMA 4X *with wall mount
WDR	Forensic WDR	Forensic Capture	Dynamic Capture	Forensic WDR
Zipstream	✓	✓	-	✓
SIP (VoIP)	✓	✓	✓	✓
Special features	ACAP, IK08, T-coil, Pictograms, Keypad, HDMI, Secure Boot, IK08	ACAP, Mullion style installation, UL294	ACAP, IK08	ACAP, Pictograms, suitable with US 2-gang box, IK10

Network I/O relay modules

	AXIS A9188 	AXIS A9188-VE 	AXIS A9161 
Number of I/Os	8	8	6
Number of relays	8	8	1
Power in	DC, PoE Class 3, PoE Class 4	DC, PoE Class 3, PoE Class 4	DC, PoE Class 3
Power out	DC	DC	DC
Outdoor ready	-	✓	-
Approvals	-	UL 294	-
ACAP support	✓	✓	✓

Access control

Network door controllers





	AXIS A1001 Entry Manager 	AXIS A1001 Partner 	AXIS A1601 
ONVIF Profile	A and C	A and C	A and C
Door controllers per system	33	Integration dependent	Integration dependent
Readers per system	66	Integration dependent	Integration dependent
Wired readers per controller	≤ 2 (Wiegand, RS485, (OSDP))	≤ 2 (Wiegand, RS485, (OSDP))	≤ 2 (Wiegand, RS485, (OSDP))
Wireless lock	ASSA ABLOY Aperio® wireless lock & SimonsVoss SmartIntego wireless lock	ASSA ABLOY Aperio® wireless lock & SimonsVoss SmartIntego wireless lock	ASSA ABLOY Aperio® wireless lock & SimonsVoss SmartIntego wireless lock
Credentials per controller	≤ 400	≤ 50 000	≤ 70 000
Number of power out & relays	2 DC lock outputs & 1 solid state relay	2 DC lock outputs & 1 solid state relay	2 form C relays
Number of I/Os	2	2	6
Power	DC, PoE Class 3	DC, PoE Class 3	DC, PoE Class 4
Plenum rated	✓	✓	✓
UL 294	✓	✓	✓
Operating temperature	0 °C to 50 °C (32 °F to 122 °F)	0 °C to 50 °C (32 °F to 122 °F)	-40 °C to 55 °C (-40 °F to 131 °F)

Card readers

	AXIS A4011-E 	AXIS A4010-E 
Keypad	✓	-
LED symbols	✓	✓
RS485(OSDP)	✓	✓
Power	DC	DC
Outdoor ready	IP54	IP65
UL 294	✓	✓

Network audio


Network speakers

	AXIS C1310-E	AXIS C1410	AXIS C1004-E	AXIS C2005
				
Voice announcements	✓	✓	✓	✓
Onboard audio clips	✓	✓	✓	✓
Background music	-	✓	✓	✓
Power	PoE	PoE	PoE	PoE
Max sound pressure level	>121 dB	>90 dB	>96 dB	>95 dB
Frequency response	280 Hz - 12.5 kHz	100 Hz - 20 kHz	60 Hz - 20 kHz	45 Hz - 20 kHz
Coverage pattern	70° horizontal by 100° vertical	145° coaxial	130° horizontal by 100° vertical	130° coaxial
Memory card slot	-	-	✓	✓
In-/output ports	1/1	-	-	-
PIR sensor	-	✓	-	-
Built-in mic	✓	✓	✓	✓
IP rating	IP67	-	IP45	-
Outdoor ready	✓	-	Semi outdoor ready	-
Special features	Audio Manager Edge included, VAPIX, ACAP, SIP	Audio Manager Edge included, VAPIX, ACAP, SIP	Audio Manager Edge included, VAPIX, ACAP, SIP	Audio Manager Edge included, VAPIX, ACAP, SIP



Audio management software

	AXIS Audio Manager Edge	AXIS Audio Manager Pro	AXIS Audio Manager Pro C7050 MkII
			
Please note; AXIS Audio Manager Edge is built -in on Axis audio devices. AXIS Audio Manager Pro is the standalone software version while AXIS Audio Manager Pro C7050 also includes a PC hardware.			
Number of speakers	200	1000+	1000+
Number of zones	20	100+	100+
Scheduling	Weekly	Advanced	Advanced
Content management	✓	✓	✓
Licences included	✓	✓	✓
Hardware	-	Minimum requirement on PC hardware As C7050 or better	Intel® Pentium® Gold G5400T
Storage	-	128 GB required	128 GB SSD included
Operating system	-	Supported OS: Microsoft Windows 10, Windows Server 2016, Windows Server 2019	Included OS: Microsoft Windows 10 IoT
Virtual Machine support	-	VMWare ESXi, Microsoft Hyper-V, Microsoft Windows Datacenter With configuration and resources allocated similar to the minimum hardware requirements	-

Network microphone

	2N SIP Mic
	
Microphone type	Paging console
Configurable buttons	12
Voice announcements	✓
Onboard audio clips	✓
Power	PoE, DC
Frequency response	400 Hz - 7.5 kHz (-10 dB), 275 Hz - 12 kHz (-20 dB)
Memory card slot	-
Outdoor ready	-
Special features	VAPIX, SIP

Audio system devices

	AXIS C8210 Network Audio Amplifier	AXIS C8033 Network Audio Bridge
		
Built-in amplifier	✓	-
Audio input	Mic in 3-pole 3.5 mm jack	Line level 3-pole 3.5 mm jack
Audio output	Speaker out 2-pole 5.08 mm	Line level RCA R+L
Voice announcements	✓	✓
Onboard audio clips	✓	✓
Background music	✓	✓
Configurable I/O:s	2	2
Power	PoE+	PoE, DC
Memory card slot	✓	✓
Built-in mic	-	-
IP rating	IP20	IP20
Outdoor ready	-	-
Special features	Audio Manager Edge included, VAPIX, ACAP, SIP	Audio Manager Edge included, VAPIX, ACAP, SIP


Everything you need to complete your systems

We offer a complete range of high-quality accessories to complement your network video, audio, access control, and intercom systems.

Accessory selector

Go to the Axis accessory selector to find the right accessories for your Axis products.

www.axis.com/products/accessory-selector

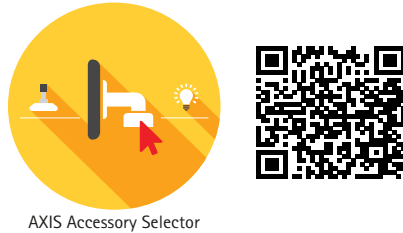

AXIS Accessory Selector

Storage

Reliable storage on hard drives or SD cards.



Illuminators

White and infra-red led illuminators.



Housings and cabinets

Protective housing and enclosures for cameras and accessories.



Lenses

Optional lenses to meet special requirements.



Tools and extras

Tools and accessories to manage, maintain and wash your Axis product.



Wearables accessories

Accessories for body worn cameras.



Canon accessories

These accessories are designed to fit with Canon cameras and enable the cameras to be mounted in various indoor and outdoor situations.



Mounts

All you need to complete your installation.



Power and connectivity

All you need to power your system and connect its components.



Joysticks and keypads

Modular control board for professional camera and video management.



Audio

Audio accessories for your system





Making Axis devices even smarter

We offer analytics that turn Axis devices into sophisticated tools you can use to better protect people and property and make informed decisions about your business or operations.

Analytics for security and safety

Perimeter and area security

- ◆ AXIS Object Analytics
- ◆ AXIS Perimeter Defender
- ◆ AXIS Perimeter Defender PTZ Autotracking
- ◆ AXIS Video Motion Detection

AXIS Guard Suite

- ◆ AXIS Fence Guard
- ◆ AXIS Loitering Guard
- ◆ AXIS Motion Guard

Vehicle access control

- ◆ AXIS License Plate Verifier

Privacy protection

- ◆ AXIS Live Privacy Shield

Loss prevention

- ◆ AXIS Direction Detector*
- ◆ AXIS Face Detector
- ◆ AXIS Tailgating Detector*
- ◆ AXIS Random Selector*

Analytics for operational efficiency

Business intelligence

- ◆ AXIS People Counter*
- ◆ AXIS P8815-2 3D People Counter*
- ◆ AXIS Queue Monitor*
- ◆ AXIS Occupancy Estimator*

On-street parking surveillance

- ◆ AXIS Parking Violation Detection

Applications for data management

- ◆ AXIS Store Reporter
- ◆ AXIS Store Data Manager

Applications for data management are compatible with products marked with an asterisk ().*

For more information, please go to:
www.axis.com/products/analytics-and-other-applications

AXIS Camera Application Platform

Easy access to compatible, customized applications from our partners

AXIS Camera Application Platform (ACAP), which is supported on most Axis devices, opens the door to a broad selection of security, safety, and operational efficiency applications. ACAP is an open platform that allows you to install apps from Axis and our partners to meet your specific needs.



About Axis Communications

Axis enables a smarter and safer world by creating network solutions that provide insights for improving security and new ways of doing business. As the industry leader in network video, Axis offers products and services for video surveillance and analytics, access control, intercom and audio systems.

Axis has more than 3,800 dedicated employees in over 50 countries and collaborates with partners worldwide to deliver customer solutions. Axis was founded in 1984 and has its headquarters in Lund, Sweden.

For more information about Axis, please visit our website www.axis.com

Distributed by: