

NOTE:ALL MATERIAL COMPLIANT ROHS STANDARD

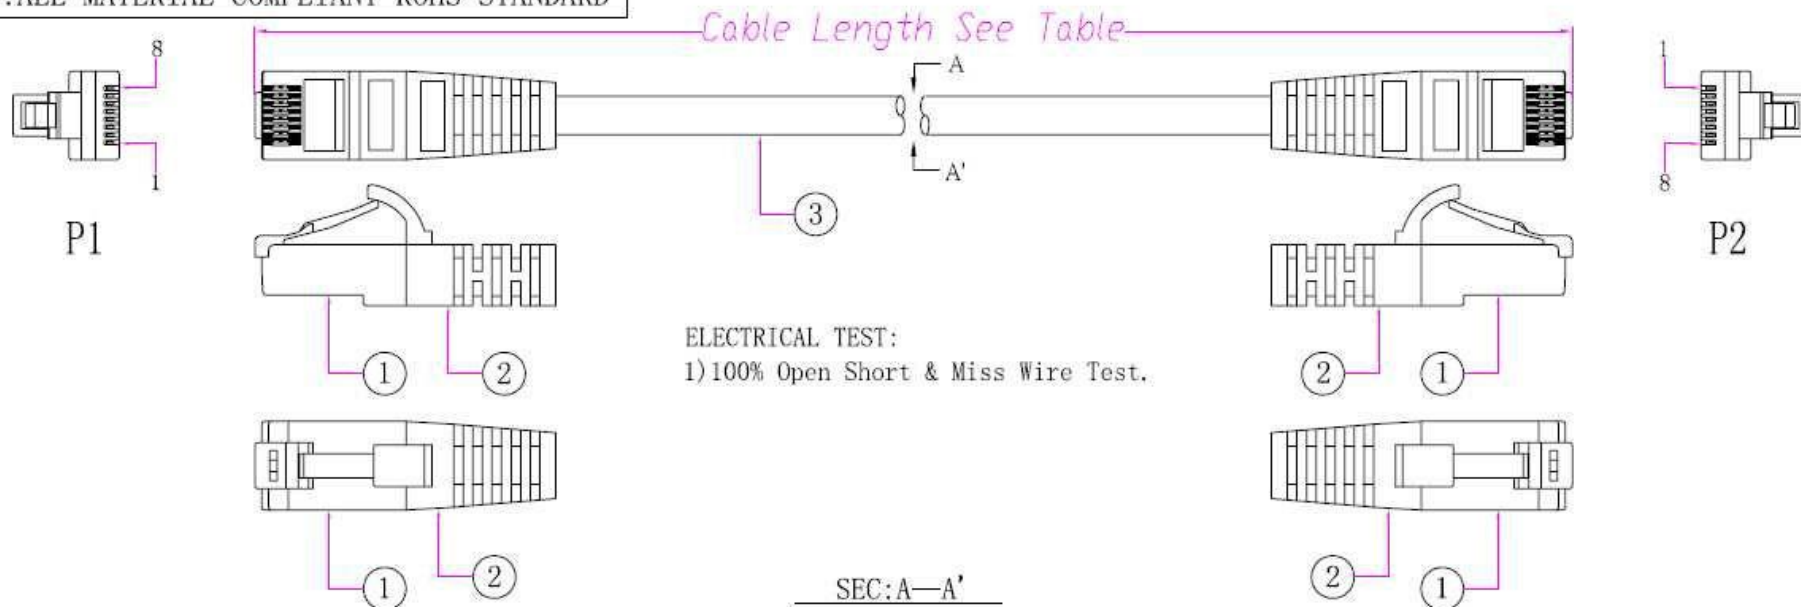


TABLE:

NO.	ITEM NO.	CABLE LENGTH	JACKET & MOLDING COLOR
1	90-C6B-XXGN	XX±XXmm	Green
2	90-C6B-XXRD	XX±XXmm	Red
3	90-C6B-XXWH	XX±XXmm	White
4	90-C6B-XXAH	XX±XXmm	Ash
5	90-C6B-XXBK	XX±XXmm	Black
6	90-C6B-XXYL	XX±XXmm	Yellow
7	90-C6B-XXBL	XX±XXmm	Blue
8	90-C6B-XXOR	XX±XXmm	Orange

MATERIAL LIST:

③	CABLE CAT6	(24AWG 7/0.20mm Bare Copper + HD-PE)*4P+Filler(Cross skeleton) Jacket (PVC Color:See Table), OD:ø6.0±0.3mm. Marking: WELTRON RoHS COMPLIANT ENHANCED 550MHZ PATCH CORD E316395 24AWG 4PR CM C(UL) 60°C VERIFIED ISO/IEC 11801 AND TIA/EIA 568B CAT6 xxxFT	1	PC
②	Molding	45P PVC, Color(See Table).		KG
①	8P8C PLUG	8P8C Plug(Transparent), The Pin Gold Plated.	2	PCS
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT' Y	UN.

WIRING

P1		P2
1	Orange	1
2	White-Orange	2
3	Green	3
6	White-Green	6
5	Blue	5
4	White-Blue	4
7	Brown	7
8	White-Brown	8

Customer 客 户:		Item NO.: See Table	
Title 品名: 8P8C PLUG TO 8P8C PLUG Cat6 UTP CABLE			
Drawing NO. 图 号: 90-C6B-XX		Revision 版 次: A-1	
Design 设计: HZG		Revised 内容:	
Check 审查: HuangHua		Date 日期: 2012.08.29	Tolerance 公差: .XX(0.01)
Approved 核准: DHP		Units 单位: mm	3DR Page 页数: 1/1