

# 8 Port Gigabit PoE Switch

4 Port PoE + 4 Port Uplink

0E-8P4POEGIG

**UltraTech**  
POWER PRODUCTS

## PRODUCT DESCRIPTION

The 8 Port Gigabit PoE Switch is fully integrated to support security monitoring, providing high-performance packet forwarding and gigabit Ethernet transfer rates. Adaptive ports use the appropriate bandwidth to ensure clear images and smooth transmission for any application, including high definition video recording or streaming.

## FEATURES

- **8 adaptive gigabit Ethernet ports:**
  - 4 x PoE ports (RJ45)
  - 4 x Uplink ports (RJ45)
- **Quick setup, with plug and play**
- **16 Gbps switching capacity**
- **62W PoE budget**
- **Port status LED indicator**
- **Power adapter included**
- **Energy efficient**
- **Standard: 802.3/802.3u/802.3ab/802.3af/at compliant**
- **Limited Lifetime Warranty**



## SPECIFICATIONS

<b>PART #</b>	<b>0E-8P4POEGIG</b>
<b>UPC</b>	840049300842
<b>INPUT POWER</b>	100-240 VAC
<b>TRANSMISSION DISTANCE</b>	328 ft. (100m)
<b>MAC ADDRESS TABLE</b>	2K
<b>SWITCHING CAPACITY</b>	16 Gbps
<b>DIMENSIONS (L x W x H)</b>	5.43" x 3.11" x 1" (138 x 79 x 25mm)
<b>WEIGHT</b>	1.54 lbs. (0.7kg)



FOR MORE INFORMATION, CONTACT TECH SUPPORT: 1.833.574.9124

# Commutateur PoE Gigabit à 8 ports

**UltraTech**  
POWER PRODUCTS

4 ports PoE + 4 ports Uplink

0E-8P4POEGIG

## DESCRIPTION DU PRODUIT

Le commutateur PoE Gigabit à 8 ports permet une surveillance de la sécurité intégrée. Il offre une transmission de paquets à haute performance et une vitesse de transfert Gigabit rapide. Les ports actifs utilisent la bande passante appropriée pour des images limpides et une transmission efficace, peu importe l'application, y compris l'enregistrement et la diffusion vidéo haute définition.

## CARACTÉRISTIQUES

- **8 ports Ethernet Gigabit adaptatifs**
  - 4 ports PoE (RJ45)
  - 4 ports Uplink (RJ45)
- **Configuration facile prête à l'emploi**
- **Capacité de commutation de 16 Go/s**
- **Puissance PoE totale de 62 W**
- **Indicateur à DEL d'état des ports**
- **Adaptateur inclus**
- **Efficacité énergétique**
- **Normes : Conformité 802.3/802.3u/802.3ab/802.3af/802.3at**
- **Garantie à vie limitée**



## SPÉCIFICATIONS

NO DE PIÈCE	0E-8P4POEGIG
CUP	840049300842
PUISSANCE D'ENTRÉE	100 à 240 VCA
DISTANCE DE TRANSMISSION	328 pi (100 m)
TABLE D'ADRESSES MAC	2K
CAPACITÉ DE COMMUTATION	16 Go/s
DIMENSIONS (L x l x H)	5,43 x 3,11 x 1 po (138 x 79 x 25 mm)
POIDS	1,54 lb (0,7 kg)



# 8 Port Gigabit PoE Switch

4 Port PoE + 4 Port Uplink




## ADDITIONAL SPECIFICATIONS


<b>POWER</b>	Power Supply		External power supply
	Voltage Range		52 VDC
	PoE Power Budget		62W for PoE
<b>ETHERNET</b>	Speed		Ports 1 to 8: 10/100/1000 Mbps
	Transmission Distance		Ports 1 to 8: 328 ft. (100m)
<b>NETWORK SWITCH</b>	Ethernet Standard		IEEE 802.3/802.3u/802.3ab/802.3af/at
	Switching Capacity		16 Gbps
	Transfer Rate		14,880 pps for 10 Mbps 148,800 pps for 100 Mbps 1,488,000 pps for 1000 Mbps
	MAC Address Table		2K MAC
<b>LINK/ACT INDICATOR</b>	On	Green	Port connecting
	Blinks	-	Port receiving or transmitting data
	Off	-	Port is not successfully linked to device
<b>PoE</b>	On	Green	PD is connected
	Off	-	No PD is connected or power forwarding failed
	PoE PIN assignment		V+(RJ45 Pin 1,2), V-(RJ45 Pin 3, 6)
<b>WORKING ENVIRONMENT</b>	Working Temperature		0 ~ 40°C (32 ~ 104°F)
	Storage Temperature		-40 ~ 70°C (-40 ~ 158°F)
	Humidity Non-Condensing		0 ~ 85%
<b>MECHANICAL</b>	Dimensions (L x W x H)		5.43" x 3.11" x 1" (138 x 79 x 25mm)
	Color		Black

## PHYSICAL INTERFACE

Front



Back

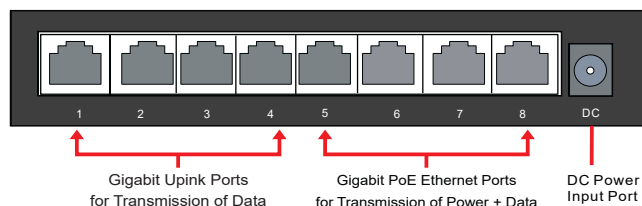

FOR MORE INFORMATION, CONTACT TECH SUPPORT: 1.833.574.9124