

18/2 PLENUM RATED, UNSHIELDED SECURITY & CONTROL CABLE




18 AWG 2 Stranded Conductors

Ratings CMP, CL3P, FT6
Approvals ETL Listed

Construction

Conductor 18 AWG 19 Strand Bare Copper
Conductor Count 2
Insulation Plenum PVC (0.007" nom.)
Insulation Colors Black, Red
Lay Length 3.29" nom.
Shielding N/A
Rip Cord Yes
Jacket Plenum PVC (0.015" nom.)
Overall Diameter 0.148" nom.

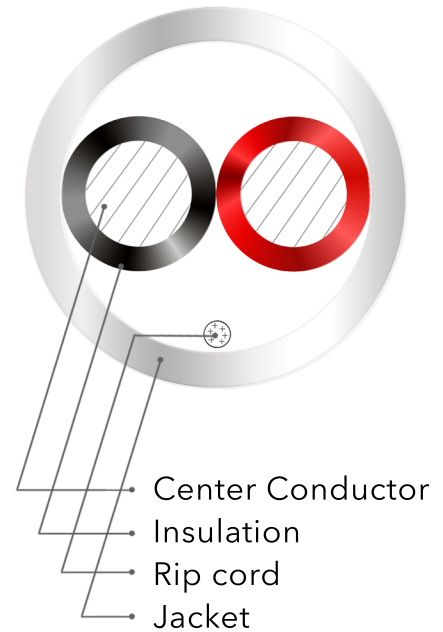

Print Legend ADI PRO P/N RN-9003XXX OXYGEN
FREE 2C18 3180662 C(ETL)US CL3P 75C, CMP FT6
ROHS LOT#XXXX MMDDYY XXXXFT

Properties

Operating Voltage 300 Volts max.
DC Resistance 6.66 Ohms/1000' at 20°C
Capacitance 32.2 pF/ft. nom.
Temperature -20°C to 75°C
Flame Rating NFPA 262 (Plenum);
CSA C22.2 No. 2556 (FT6)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-9003110	OFF WHITE	1000FT	EXPRESS BOX
RN-9003510	OFF WHITE	500FT	EXPRESS BOX



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands