Specifications — Luma

_____ projection screens, size _____ h. x _____ w., wall/ceiling mounting. Case of 22 ga. steel, flat back design, with scratch-resistant white polyester finish. Friction-free closure. Viewing surface shall be flame and mildew resistant.

GREENGUARD
PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818
GOLD

Matt White XT1000E and Contrast Grey XH800E viewing surfaces are certified to GREENGUARD standards for low chemical emissions into indoor air during product usage. For more information, visit ul.com/gg. Endcaps finished to match case, with integral roller brackets, concealing roller ends. With matching universal mounting brackets. Fabric securely attached to one-piece rigid steel roller. Bottom of viewing surface attached to weighted dowel. Saddle and pull attached by screws.

Specifications subject to change without notice.

Please Check All Appropriate Selections

Select Viewing Surface:
☐ Matt White XT1000E(1.0 gain): *GREENGUARD Gold certified*
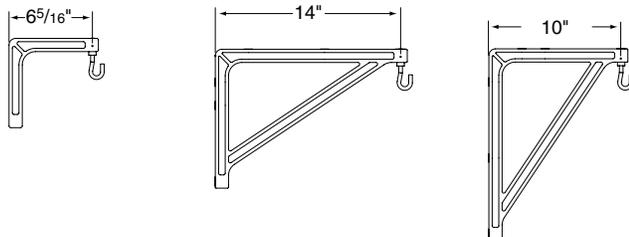☐ Contrast Grey XH800E (0.8 gain): *GREENGUARD Gold certified: Optional*
☐ Other: _____

Optional Accessories:
☐ Mounting Brackets
    ☐ 6" Brackets
    ☐ 10"/14" Brackets

☐ T-Bar Twist Clips *(Not recommended for screens over 70" x 70")*
☐ Magnetic Tilt Lock Mechanism
☐ Wall Tie-Back
☐ Extra Screen Drop[1] Length: _____
    ☐ Same color as viewing surface *(standard on AV format screens)*
    ☐ Black *(standard on other formats)*
Length of total drop *(including standard 12" on some sizes—see grid at right)*[1]

☐ Black Masking Borders
(1½" wide on sizes through 70" wide; 1¾" on 84" wide; 2" wide on larger sizes)
(optional on AV format screens; standard on all others)
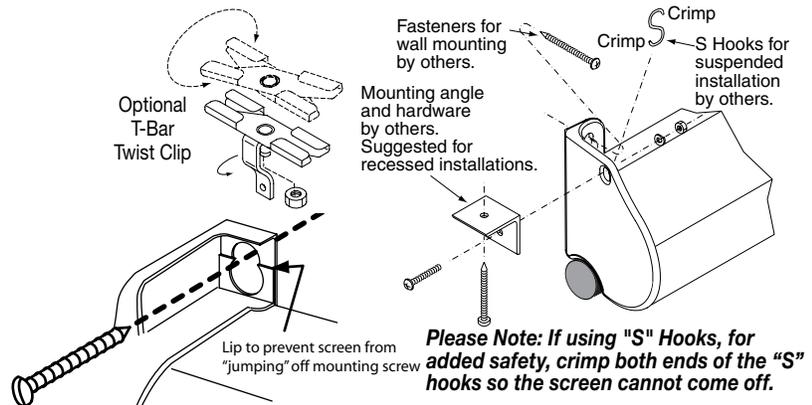
Optional Mounting Brackets

Dimensions & Data

Size H x W			Case Length	Net Wt. (lbs.)	Qty.
AV Format					
50" x 50"			52³⁄₈"	9	
60" x 60"			62³⁄₈"	11	
70" x 70"			72³⁄₈"	15	
84" x 84"			86³⁄₈"	20	
72" x 96"			98⁷⁄₈"	23	
96" x 96"			98⁷⁄₈"	25	

Nominal Diagonal	Image Area	Overall Size	Case Length	Net Wt. (lbs.)	Qty.
NTSC Video Format (4:3)					
6'	42½" x 56½"	46½" x 59½"	62³⁄₈"	11	
7'	50" x 66½"	53½" x 69½"	72³⁄₈"	14	
100"	60" x 80"	64" x 83½"	86³⁄₈"	17	
10'	69" x 92"	73" x 96"	98⁷⁄₈"	21	
HDTV Format (16:9)					
65"[1]	31¾" x 56½"	43¾" x 59½"	62³⁄₈"	11	
73"[1]	36" x 64"	48" x 69½"	72³⁄₈"	14	
82"[1]	40½" x 72"	52½" x 74"	76⁷⁄₈"	17	
92"[1]	45" x 80"	57" x 83½"	86³⁄₈"	19	
100"[1]	49" x 87"	61" x 91"	93⁷⁄₈"	23	
106"[1]	52" x 92"	64" x 96"	98⁷⁄₈"	23	
16:10 Format					
67"[1]	35¼" x 56½"	47¼" x 59½"	62³⁄₈"	11	
76"[1]	40" x 64"	52" x 69½"	72³⁄₈"	14	
85"[1]	45" x 72"	57" x 74"	76⁷⁄₈"	17	
94"[1]	50" x 80"	62" x 83½"	86³⁄₈"	19	
109"[1]	57½" x 92"	69½" x 96"	98⁷⁄₈"	23	
Custom Size					

[1] These sizes include 12" black drop as standard.
  Case height—4 ¾"   Case width—3 ³⁄₁₆"
  Case length = viewing surface overall width + 2 ⁷⁄₈".

15:9 and 1.85:1 Formats also available.

Methods Of Installation (Hardware by others)

Optional T-Bar Twist Clip

Fasteners for wall mounting by others.

Mounting angle and hardware by others. Suggested for recessed installations.

Crimp
Crimp
S Hooks for suspended installation by others.

Lip to prevent screen from "jumping" off mounting screw

Please Note: If using "S" Hooks, for added safety, crimp both ends of the "S" hooks so the screen cannot come off.

DRAPER®

PROJECT:_____
_____
ARCHITECT:_____
CONTRACTOR:_____
SUPPLIER: _____
DATE: _____ REVISED: _____