

# 4K VIDEO WALL SOLUTIONS

ORION Images R4N (FHD) Video Wall series has Immediate Benefits for Security Room, Retail, Shopping Mall, Corporation, Broadcast, Transportation, Government, Health Care, Casino and more

# LED R4N46UNF



The R4N (FHD) Series of LCD displays is the perfect solution for ultra high definition video walls. With a total of 3840x2160 (based on 2 x 2 configuration) and the ability to take a single video source and display it across the entire video wall. It is an excellent choice for command & control centers, corporate, AV and digital signage applications.

<b>2.3mm 1.2mm</b> Bezel Width	<b>4K</b> Input Resolution	<b>500 cd/m<sup>2</sup></b> Max Brightness	 Mobile App	<b>HDMI</b> HDMI Input 3ea	 DP Input / Output	 RS-232 Input/Output	 PIP / PBP / QUAD
---------------------------------------	-------------------------------	---	----------------	-------------------------------	-----------------------	-------------------------	----------------------

## Video Walls for Security, Control Rooms, Commercial AV, Professional AV & has immediate benefits for:

In addition, this solution can also be used for corporate AV and Digital Signage applications such as shopping malls, airports, stadiums, lobby signage, boardrooms, and more. Whether small lobby display or extra large video walls, the tiled R4N series makes statement. Public Display Signage receives 10 times the eye contact of static signage and is creating cost-effective opportunities to improve customer service, safety, way finding, branding, training, and communications.

Unlike plasma technology, LCD video walls require less power consumption and with auto pixel shift built in they are not subject to permanent, irreversible burn-in. Unlike individual mount LCD's that leave gaps between each monitor, tiled video walls offer more flexibility, scalability and the possibility for a higher resolution.

**ULTRA NARROW BEZEL**

UNF/UHF : Top & Left Side Bezel is 2.3mm, Bottom & Right Side Bezel is 1.2mm

- » Security / Control Rooms
- » Retail
- » Universities & colleges
- » Corporations
- » Transportation
- » Health Care & Medical
- » Government
- » Financial Institutions
- » Hospitality
- » Casino

### COMPLETE VIDEO WALL SOLUTIONS / Easy control Mobile application


*With mobile applications, Video wall control more easily.*

### SPECIFICATIONS

R4N46UNF	
<b>Bezel Width</b>	
Bezel Width	2.3mm/1.2mm
<b>Display</b>	
Screen Size	46 Inch
Max. Resolution	1920 x 1080 @ 60Hz
Pixel Pitch	0.530 x 0.530mm
Brightness	500cd/m <sup>2</sup>
Contrast Ratio	3500 : 1
Aspect Ratio	16 : 9
Viewing Angle	178° / 178°
Display Color	16.7 Million (8bit)
Response Time	< 8ms (Gray to Gray)
Video System	NTSC / PAL
<b>Interface</b>	
Display Port In/ Out	1 / 1
HDMI Input	3
RS232 In / Out	1 / 1
Audio Out (3.5 Ø stereo)	1
<b>Audio</b>	
Built In Speaker	10W x 2 (Option)
<b>Transmitter</b>	
IR Remote Control	Yes
<b>Features</b>	
Multi Display Function	PBP / PIP / QUAD
Temperature Sensor	Yes (Option)
De-Interface	Yes
Noise Reduction	Yes
Auto Fan Control System	Yes (Option)
Auto Pixel Shift	Yes
Auto Source Switching	Yes
Edge Setting (Horizontal / Vertical)	Yes
Advance Auto Power Recovery	Yes
Multi Language	English
RS-232C Control	Monitor OSD control using PC
<b>Outline Dimension</b>	
Dimension (W x H x D)	40.23" x 22.69" x 3.73"
Net. Weight	21Kg (46.3 lbs)
<b>Warranty</b>	
Part / Labor	3year / 3year
<b>Circumstance</b>	
Operating Temperature	0° ~ 40° C / 32° ~ 104° F
<b>Power</b>	
Electrical Ratings	AC 100 ~ 240V (50/60Hz)
Power Consumption	< 121W
<b>Mount</b>	
VESA™ Mount Size	600 x 400mm
Video Wall	WFS, WES, WSD, WSR
Stand Alone	WB-4663

※ Specifications and design are subject to change without notice.

### MOUNTS

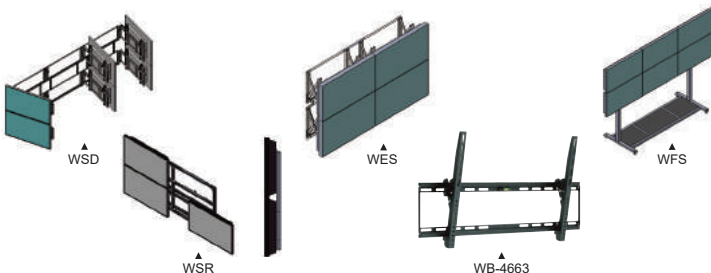


### HARDWARE

#### Hardware features:


- ▶ Spread 1 image across multiple monitors using 1 video source
- ▶ Video Wall Processor built in
- ▶ Remote Display Management (IR Remote or Mobile WIFI)
- ▶ Display Port 1 In / 1 Out
- ▶ HDMI 3 In
- ▶ RS-232C In / Out for pc / server control
- ▶ Control panel Lock (panel or IR)
- ▶ All metal chassis
- ▶ Auto power recovery
- ▶ Auto pixel shift
- ▶ PIP / PBP / QUAD Displays
- ▶ VESA standard hole patterns

### INTERFACE

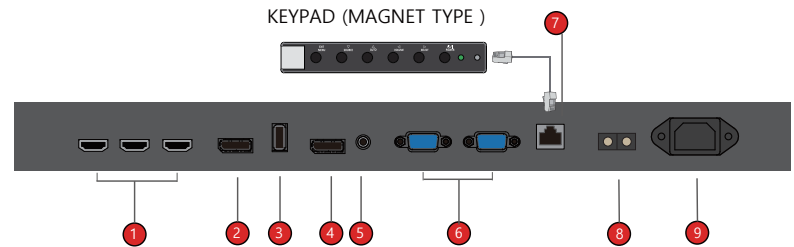

- ① **HDMI1~3** : HDMI1~3 Input
- ② **DP** : DP signal Input
- ③ **USB** : FW Update Input
- ④ **DP** : DP signal Output
- ⑤ **Audio** : Audio Line Output
- ⑥ **RS-232** : RS-232 Control signal Input/Loop Output
- ⑦ **Keypad** : UTP cable Input for Keypad
- ⑧ **Rotary Switch** : Setting Set ID
- ⑨ **AC Power** : AC Power Input

### DIMENSION

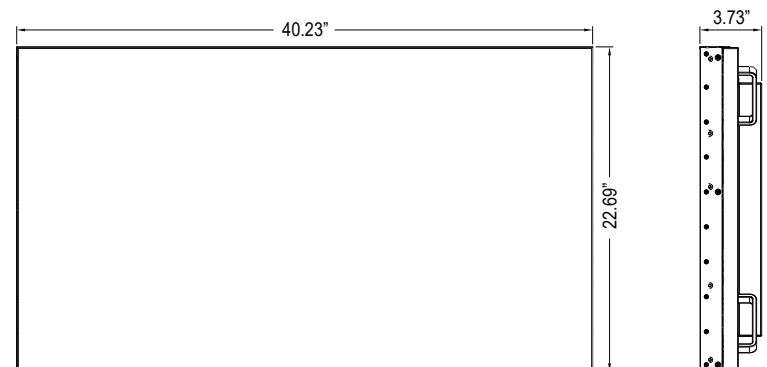

\*Design and specifications are subject to change without notice