


# 12-Port Category 5e Front Access Patch Panel

## PRODUCT SPECIFICATION

### Package includes:

- A. 12-Port CAT 5e Patch Panel, 1 pc
- B. #12-24 X  $\frac{3}{4}$ ", Machine Screw, 2 pcs
- C. Cable Tie, 4 pcs
- D. Installation Instructions, 1 sheet

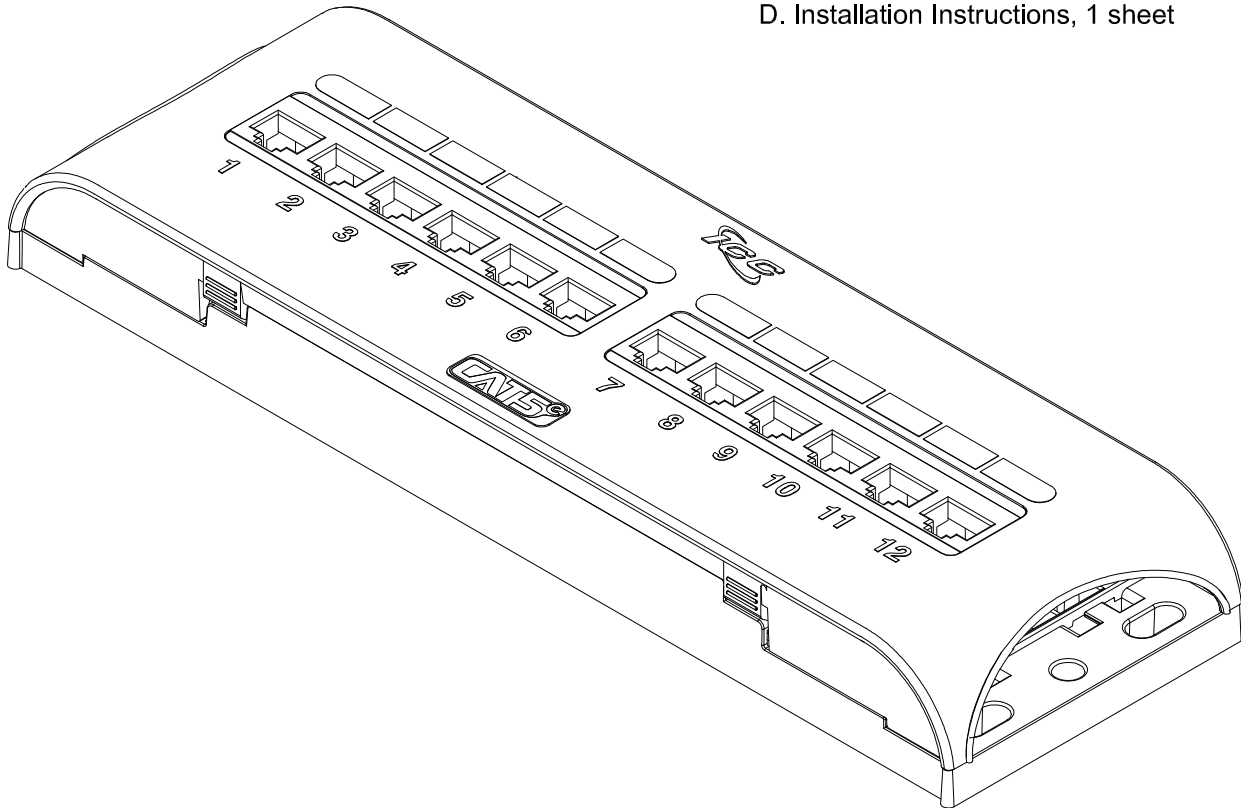

### Features and Benefits:

- Wall mounted CAT 5e component rated patch panel provides excellent performance for data networks requiring maximum speed and bandwidth.
- Enhanced crosstalk cancellation reduces return loss and improves performance by rejecting noise and unwanted signals.
- Exceeds TIA-568-C.2 Category 5e connecting hardware requirements.
- Engineered to provide 110 IDC termination reducing installation time.
- Used with ICPCSJ CAT 5e patch cords, ICACSPDT00 110 punch down tool, and ICCMSR19xx distribution rack
- Installation instructions.






### PATCH PANEL, CAT 5e FRONT, 12-PORT

ITEM NO.	ICMPP12F5E
DWG NO.	PSMPP12F5E

REV.	A
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com

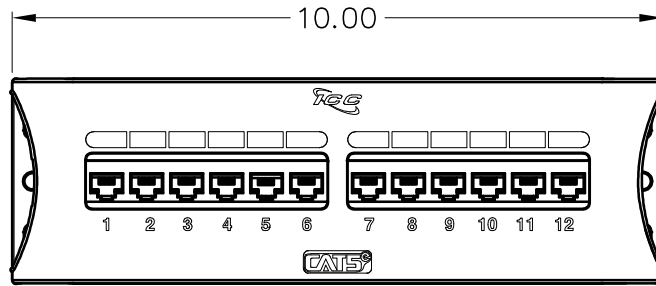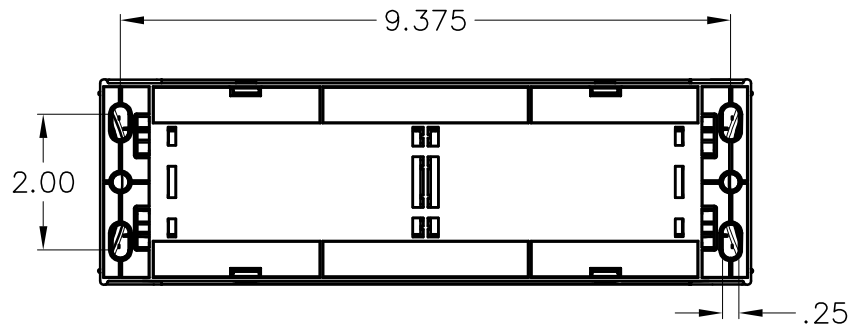

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. 12-PORT CAT 5E PATCH PANEL:

A. MATERIAL:


- 12-PORT PATCH PANEL: ABS, UL 94V-0
- JACK HOUSING: HIGH IMPACT, FLAME RETARDANT PLASTIC, UL 94V-0
- SPRING WIRE: PHOSPHOR BRONZE
- 110 CONNECTOR: PHOSPHOR BRONZE ALLOY WITH 100 MICRO-INCH ALLOY
- GOLD RATING: 50 MICRO INCHES OF GOLD OVER 100 MICRO INCHES OF NICKEL

B. MECHANICAL:

- MATING FORCE: 100 GRAMS MIN/CONTACT
- TEMPERATURE RANGE: -40°~70°C
- PLUG RETENTION IN JACK: 50N (11 LBS SQ)
- IDC WIRE GAUGE: 22~24 AWG


C. ELECTRICAL:

- CURRENT RATING: 1.5 AMP DC
- CONTACT RESISTANCE: 2.5 MILOHMS MAX

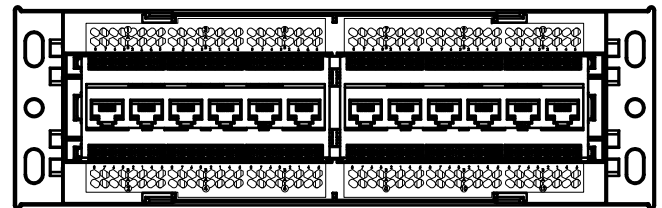

**PANEL W/NO COVER**

**PATCH PANEL, CAT 5e FRONT, 12-PORT**

ITEM NO.	ICMPP12F5E	REV.	A	
DWG NO.	PSMPP12F5E	PAGE NO.	2	

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com