
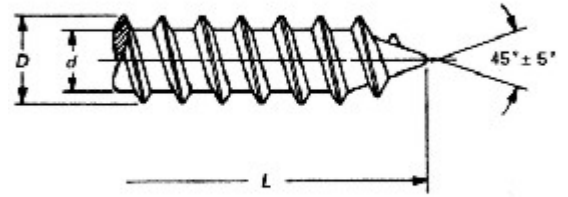


## Pan Head - Type III (square socket) - A, AB

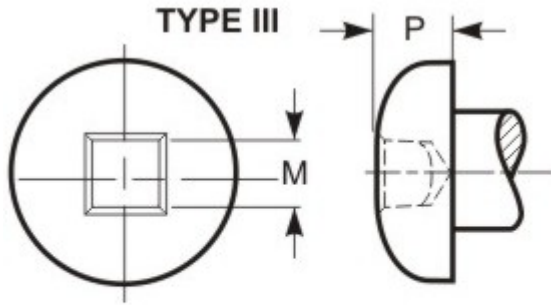

This type of recess has a square center opening, slightly tapered side walls, and a conical bottom with top edges relieved or rounded.

THREAD DATA		
Size: #10	Threads per in.: 12	Thread Class or Type: A
Major Diameter: 0.1940 - 0.1880	Minor Dia Max/Min.: 0.133 - 0.126	Standard: ASME B18.6.3-2013
DIMENSIONAL DATA		
Type: Pan Head - Type III (square socket) - A, AB	Standard: ASME B18.6.3 - 2013	Nominal Diameter: 0.19
A - Head Diameter: 0.373 - 0.357	H - Head Height: 0.133 - 0.122	Driver Size: 2R
Penetration Depth: 0.075 - 0.060	Wobble: 3°	M - Ref. Recess Dim.: 0.112
L - Length: 1-1/2	Length Tolerance: ± 0.05	
PHYSICAL REQUIREMENTS		
Nominal: 0.19	Standard: ASME B18.6.3-2013, Type A (18-8/304 Stainless)	Typical Materials: stainless steel: 304 (18-8)
Straightness Factor: N/A		
FINISH DATA		
Finish: As received steel	K factor (ref. DIN 946): 0.2	

<sup>2</sup> Calculated Pretension is equal to 75% of the bolt's yield strength achieved when using the indicated Tightening Torque.

