


Product Specifications

Category 5e MT-Series Unscreened Patch Panels

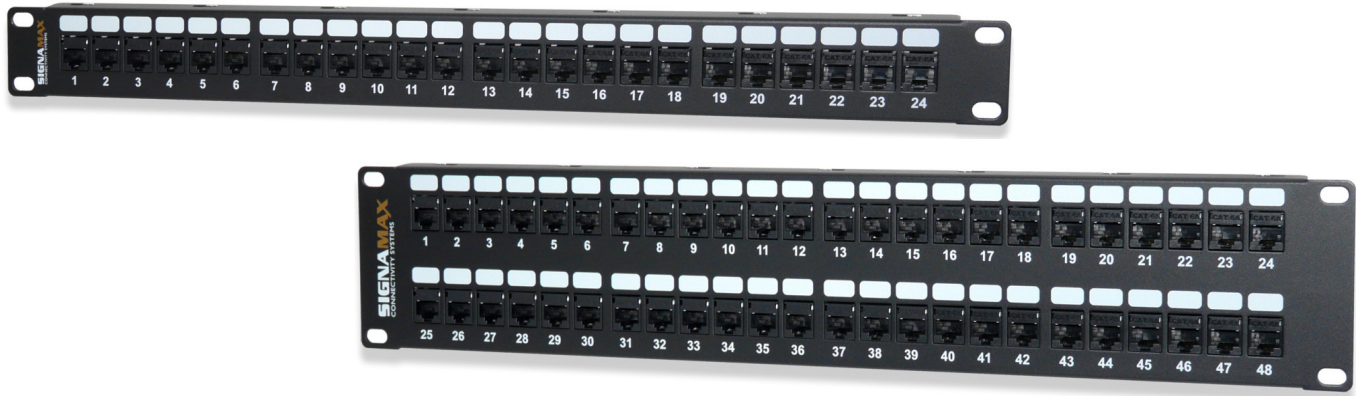

KEY FEATURES

- Exceeds ANSI/TIA-568-C.2 component performance specifications
- Supports TIA-568-C.2 category 5e 100 meter channel performance
- Removable rear cable management bar
- Improved wire retention and ease of termination with rear 110 type contacts
- Slim profile for the highest density applications
- Cold-rolled steel construction for maximum strength and durability
- Easy-to-read T568A/B wiring scheme color-coded label

The Signamax Category 5e MT-Series Unscreened Patch Panels are designed to offer a complete panel and jack option. The MT-series includes the option of a 24, 48, or 72 port panel, black snap in keystone jacks, and a cable management bar. This unique design allows easy termination and greater flexibility for future adds, moves or changes, giving installers the perfect cost effective solution for Category 5e applications.

The patch panels rolled-edge steel construction eliminates panel flex, and in lieu of fixed termination, a standard single-position 110 termination tool or a specialized Signamax multi-pair tool can be used. For easy circuit identification, each port designation features a labeling area with a reference number. The keystone jacks are rated for a minimum of 750 plug insertions providing for the highest level of system reliability.

ORDERING INFORMATION

| PART NO. | DESCRIPTION |
|-----------|--|
| 24458-C5E | 24-Port Category 5e MT-Series Patch Panel 1.75" H |
| 48458-C5E | 48-Port Category 5e MT-Series Patch Panel, 3.50" H |
| 72458-C5E | 72-Port Category 5e MT-Series Patch Panel, 3.50" H |

Panels are supplied as a kit, which includes the panel, black MT-Series unscreened jacks per port count, a cable management bar per RMU, and cable ties.

For panels with other keystone jack color options contact Customer Service.

SPECIFICATIONS

TRANSMISSION PERFORMANCE

ANSI/TIA-568-C.2: exceeds category 5e (1-100 MHz) component specifications

TRANSMISSION MEDIA

Unscreened twisted pair (U/UTP)

JACK TYPE

8p8c (8-position, 8-contact) "RJ45" type

WIRING SCHEME (See Figure 1)

ANSI/TIA-568-C.2: T568A & T568B

ISO/IEC 11801 2nd Ed.: 8-position pin/pair assignment (1-2/3-6/4-5/7-8)

WIRE GAUGE

22 to 24 AWG (0.64 to 0.51 mm)

ELECTRICAL

Insulation Resistance: Min 500 MOhm @ 100 V_{dc}

Dielectric Withstanding Voltage:

1,000 V_{dc/ac} peak contact-to-contact @ 60 Hz for 1 min

Spring Wire Contact Resistance: Max 20 mOhm

IDC Contact Resistance: Max 2.5 mOhm

Current Rating: See Figure 2

CONSTRUCTION

Panel:

Front: Steel with corrosive resistant black finish

Rear: Steel

Cable management bar: Thermoplastic with steel brackets

Jack:

Housing: High-impact thermoplastic, UL94V-0 fire-retardant

Contacts: Phosphor bronze alloy plated with min 50 µin of gold over 70 µin to 100 µin of nickel plating

IDC: 110 type, phosphor bronze alloy with 100-µin 100% tin alloy

MECHANICAL

Total Contact Force: Min 800 g for 8 wire leads with FCC compliant 8p8c plug

Retention: 50 N (11 lbf) for 60 ± 5 s

Mating Cycle Life: Min 750 cycles with FCC compliant 8p8c plug

MOUNTING DIMENSIONS:

Panel: 19-in rack mountable

Depth:

Management Bar Installed: 4.5" (114 mm)

Management Bar Uninstalled: 1.5" (38 mm)

Height:

24458-C5e: 1 RMU (1.75" (44.45 mm))

48458-C5e: 2 RMU (3.50" (88.90 mm))

72458-C5e: 2 RMU (3.50" (88.90 mm))

Jack: 1.21" D x 0.67" W x 0.76" H (30.8 mm x 16.9 mm x 19.3 mm)

ENVIRONMENTAL CONDITIONS

Operating Temperature: 14 °F to 140 °F (-10 °C to 60 °C)

Storage Temperature: -40 °F to 158 °F (-40 °C to 70 °C)

Operating RH: 93% Max (non-condensing)

COMPLIANCE

ANSI/TIA-568-C.2, IEEE 802.3 ab, FCC Part 68 Subpart F, UL 94V-0, UL 1863, IEC 60603-7

APPLICATIONS

X.21, V.11, S0, ISDN, CSMA/CD 10BASE-T, 100BASE-TX, 100BASE-T4, 100BASE-T2, 1000BASE-T, 10GBASE-T, TR 4/16/100, 100BASE-VG, ATM LAN 25/51/155, TP-PMD

WARRANTY

5 - Year Limited Component

Figure 1: Wiring Schemes


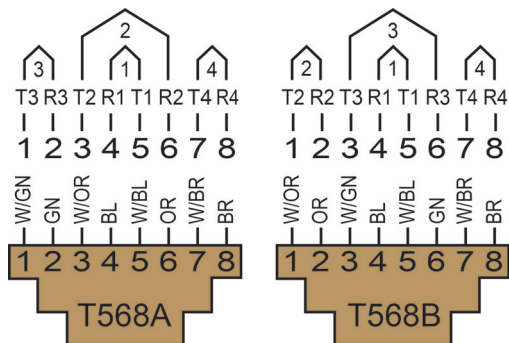


Figure 2: Current Rating



Detailed Back View

Cable management bar snaps into the back of the panel.

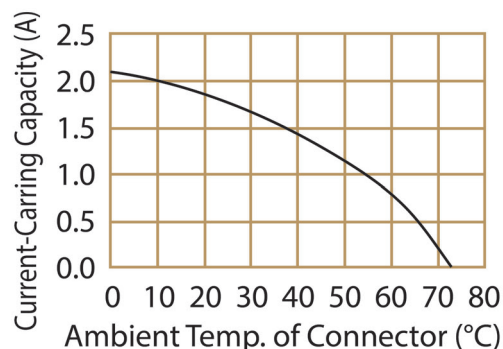

Grounding lug for attaching 6 AWG (4.5 mm) ground conductor.