

22/8 PLENUM RATED, SHIELDED SECURITY & CONTROL CABLE




22 AWG 8 Stranded Conductors, Shielded

Ratings CMP, CL3P, FT6
 Approvals ETL Listed

Construction

Conductor 22 AWG 7 Strand Bare Copper
 Conductor Count 8
 Insulation Plenum PVC (0.007" nom.)
 Insulation Colors Black, Red, White, Green, Brown, Blue, Orange, Yellow
 Lay Length 3.3" nom.
 Shielding Aluminum Foil/Mylar w/ 24 AWG Tinned-Copper Drain
 Rip Cord Yes
 Jacket Plenum PVC (0.015" nom.)
 Overall Diameter 0.18" nom.
 Print Legend ADI PRO P/N: RN-xxxx OXYGEN FREE 8C22 SHIELDED 3180662 C(ETL)US CL3P 75C, CMP FT6 ROHS LOT#xxxx xxxxFT

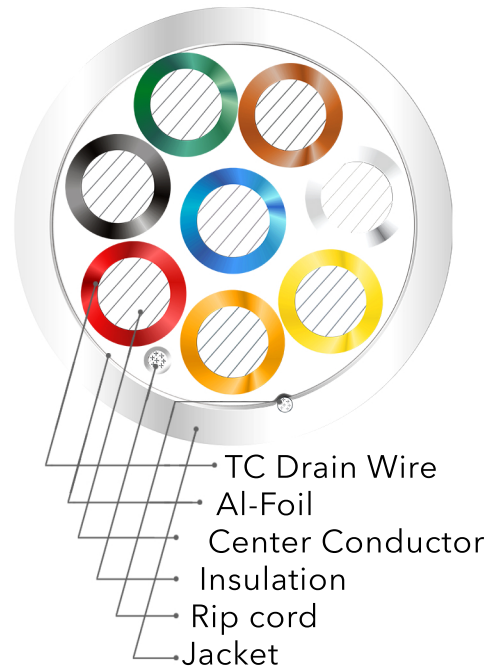

Properties

Operating Voltage 300 Volts max.
 DC Resistance 16.9 Ohms/1000' at 20°C
 Capacitance 26 pF/ft. nom.
 Temperature -20°C to 75°C
 Flame Rating NFPA 262 (Plenum); CSA C22.2 No. 2556 (FT6)
 RoHS Compliant Yes
 Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-9009110	OFF WHITE	1000FT	EXPRESS BOX



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands