

22/4 RISER RATED, UNSHIELDED SECURITY & CONTROL CABLE




22 AWG 4 Solid Conductors, Unshielded

Ratings CMR, CL3R, FT4
Approvals ETL Listed

Construction

Conductor 22 AWG Solid Bare Copper
Conductor Count 4
Insulation PVC (0.011" nom.)
Insulation Colors Black, Red, White, Green
Lay Length Straight
Shielding N/A
Rip Cord Yes
Jacket PVC (0.017" nom.)
Overall Diameter 0.146" nom.
Print Legend ADI PRO P/N: RN-xxxx OXYGEN FREE
SOLID 4C22 3180662 C(ETL)US CL3R 75C,
CMR FT4 ROHS LOT#xxxx xxxxFT

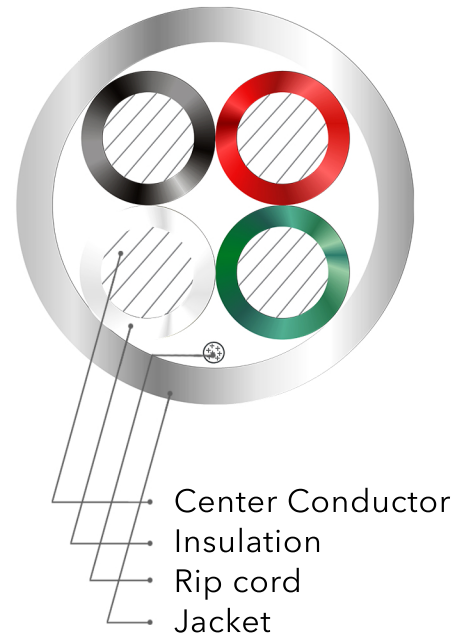

Properties

Operating Voltage 300 Volts max.
DC Resistance 18 Ohms/1000' at 20°C
Capacitance 18.8 pF/ft. nom.
Temperature -20°C to 60°C
Flame Rating UL 1666 (Riser);
CSA C22.2 No. 2556 (FT4)
RoHS Compliant Yes
Country of Origin CHINA

PART#	COLOR	LENGTH	BOX
RN-9120101	WHITE	1000FT	EXPRESS BOX
RN-9120108	BLACK	1000FT	EXPRESS BOX
RN-9120109	GREY	1000FT	EXPRESS BOX
RN-9120501	WHITE	500FT	EXPRESS BOX
RN-9125501	WHITE	500FT	SPEED COIL
RN-9125502	BLUE	500FT	SPEED COIL
RN-9125508	BLACK	500FT	SPEED COIL
RN-9125509	GREY	500FT	SPEED COIL



For more information contact your ADI Sales person or visit adiglobal.com/adiexclusivebrands